


SWP-290B

Cellophane Overwrapping Machine

Fold and heat-seal BOPP film around finished cartons. SWP-290B combines carton feeding, film handling and six-side sealing for a close-fitting retail overwrap.



PACKAGING SAMPLE / REFERENCE

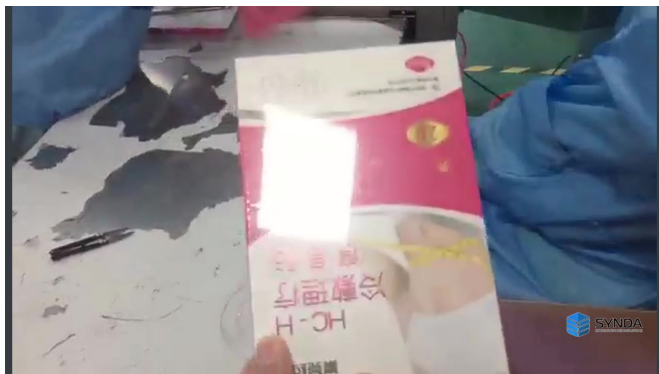


Overwrapped carton sample

A finished carton wrapped in transparent film


SWP-290B demonstration: a wrapped retail carton presented after film folding and sealing.

A closer look at SWP-290B

Original model-specific views. Configuration details are subject to the agreed supply scope.

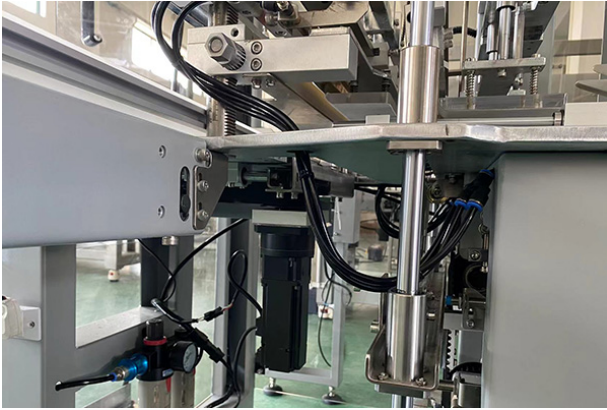

Folding mechanism

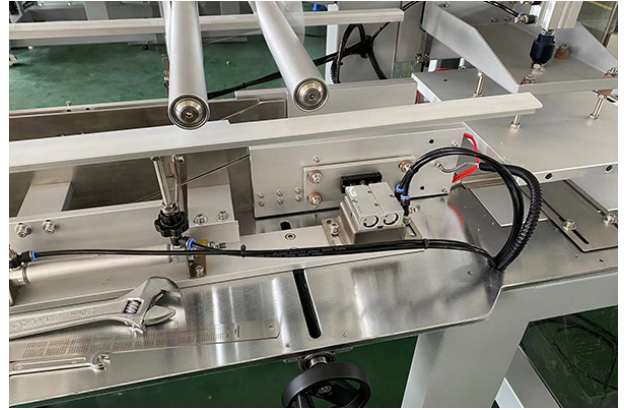

Film handling mechanism



Film transfer detail

Process at a glance

1. Feed the closed carton / 2. Draw and cut the film / 3. Fold and heat-seal / 4. Discharge the wrapped carton

Overwrapping is applied to an already closed carton. Film, tear tape and size-specific tooling must be checked with the actual box.

Technical specification

Reference figures for SWP-290B. Confirm the selected configuration before ordering.

Listed wrapping speed	30-70 packs/min; depends on carton and film
Packaging material	BOPP film with tear tape
Individual size ranges, L × W × H	60-260 × 30-160 × 15-70 mm
Combined size limits	Confirm against final tooling drawing
Electrical supply	220 V, 50 Hz
Installed power, dimensions and weight	Confirm the current build specification
Controls	PLC and HMI

Application confirmation

Carton samples, box drawing, film and tear-tape specification, desired output and electrical requirements.

Reference information only. Output depends on the product, package and configuration. Final specifications, sample compatibility and supply scope must be agreed in the technical proposal.

Discuss SWP-290B with SyndaPack

[Request a configuration](#)