


Stretch-Banding Machine

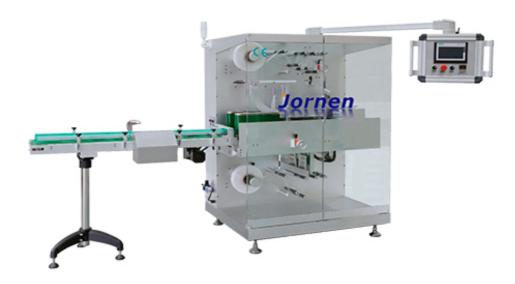

The Stretch-Banding Machine is an End-of-Line Packaging Machine. It can group together or stack cartons (or similar shaped objects) to form larger units. These are then tightly wrapped in plastic film. Compared with shrink-wrapper and overwrapper, this machine is energy-saving as it does not require heating up. It saves 50% of film materials because it partially covers the packaging. It can be connected to a packaging line with Blister Machines, Cartoners, and Case Packers.

Technical Parameters

Model:	180K	350K
Max. Output:	15 bundles/min.	25 bundles/min.
Max. Packaging Size:	240×150×300	240×150×300
Min. Packaging Size:	50×60×90	50×60×90
Machine Power:	1.5kw	1.5kw
Air pressure (Mpa):	0.6-0.8	0.6-0.8
Machine Dimension:	1100×800×1700	1100×800×1700
Machine Weight:	500kg	560kg

Model:	500K	650K
Max. Output:	35 bundles/min.	50 bundles/min.
Max. Packaging Size:	250×250×300	250×250×300
Min. Packaging Size:	50×60×90	50×60×90
Machine Power:	3kw	3kw
Air pressure (Mpa):	0.6-0.8	0.6~0.8
Machine Dimension:	1240×1000×1750	2600×1000×1850
Machine Weight:	800kg	990kg