


WP-ML series Zip-Lock Standup Bag Packing Machine

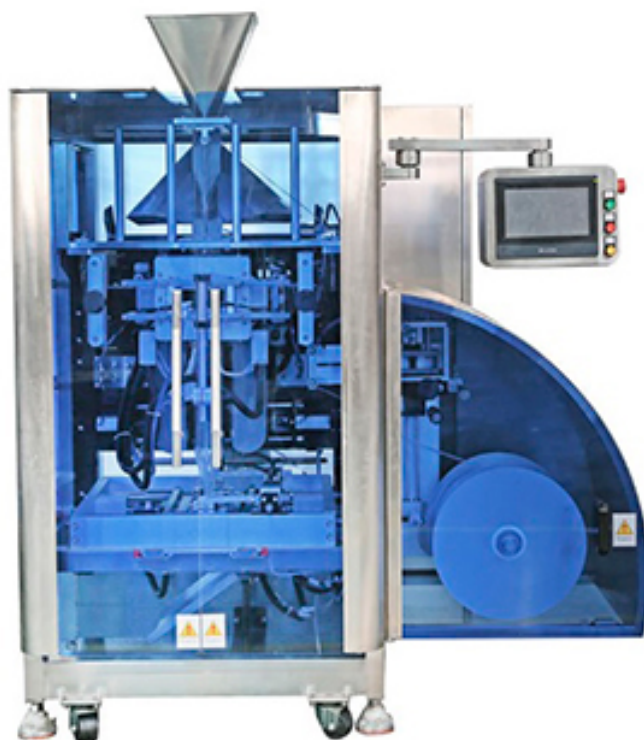

Application

- ◎ Applicable bag type: oval standup bag, three sides sealed bag, four sides sealed bag, zipper bag.
- ◎ Applicable film materials: a variety of laminated films, film thickness is 0.05~0.15mm.
- ◎ Applicable packing materials: a variety of snack food, chemical raw materials, herbal, small hardware, such as candy, bean, pet food, dry fruits, sugar, spice and some others granule product, also some powder like milk powder, coffee powder, etc.

Feature

- ◎ Panasonic PLC control, rotary man-machine interface, easy to operate.
- ◎ Film pulling is controlled by servo motor, bag length is controlled by eye mark tracking device or parameter setting(encoder is an option).
- ◎ Mechanical adjustment for both oval shape bag bottom hole punch and date printing.
- ◎ Equipped with zipper punching structure, to ensure the zipper side sealing well and making a perfect bag.
- ◎ Equipped with pneumatic bag clipping structure, to ensure the bag sealing is smooth.
- ◎ Round shape and euro hole punching is highly welcome to choose as an option.
- ◎ Three-speed-control mode for roll film feeding.
- ◎ Safety door protection, with door open alarm and machine stops, no film alarm, no ribbon alarm function and so on.
- ◎ Machine is made by stainless steel 304

Technical Parameters

Model	WP-ML5220	WP-ML7230
Film Width	280mm-520mm	280mm-720mm
Bag Size Range	L*W=(120 ~ 235)mm*(60 ~ 200)mm	L*W=(140 ~ 335)mm*(70 ~ 300)mm
Bag Bottom Width	30~80mm	40 ~ 100mm
Sealing width	5-15mm	5-15mm
Packing Speed	45 (bags/min)	40 (bags/min)
Voltage	3.9KW/220V/50(60)HZ	5.8KW/220V/50(60)HZ
Gas Pressure	0.4~0.8MPa	0.4~0.8MPa
Gas Consumption	0.7m³/min	0.8m³/min
Machine Size(mm)	2090*1820*1935	2320*1920*2125
Machine Weight	800KG	1100KG