


## *DPP-80 Blister Packaging Machine*

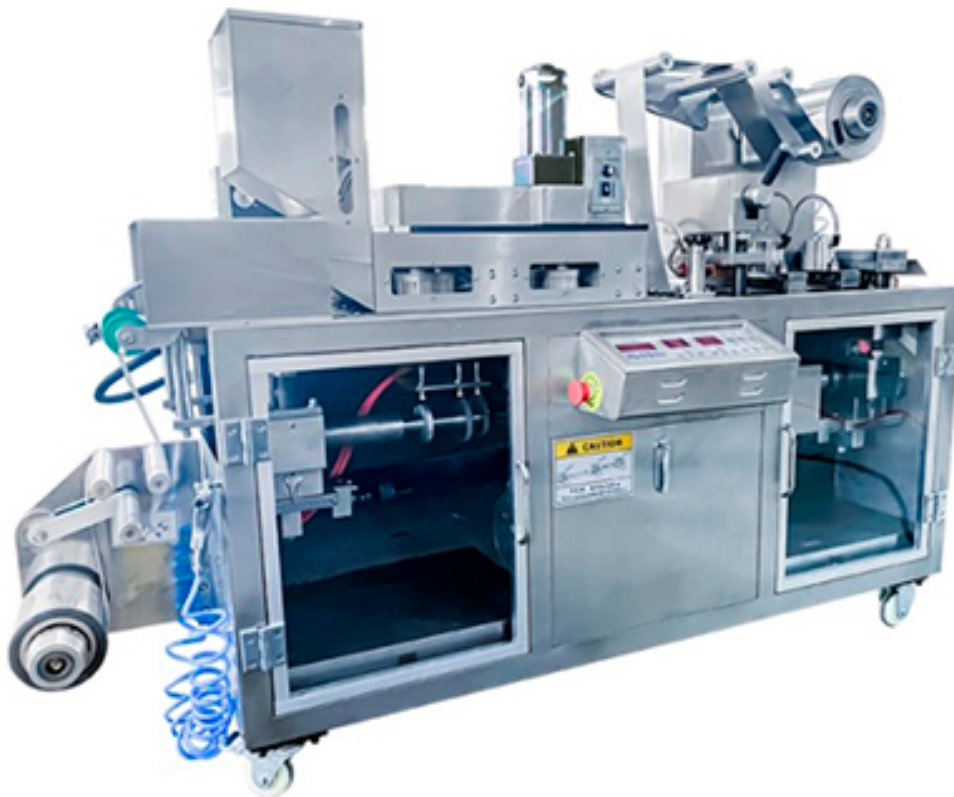

It is the latest product designed specially for middle and small sized pharmacy factory, preparation room of hospital, health care factory. It is adopted with micro-computer, touch panel operation, frequency speed regulation, adjustable stroke, convenience of operation, firm structure, well function; it is the ideal packaging equipment. It has passed Province technology production authentication.

### **Features**

1. It adopts the newest type high-power transmission mechanism to arrange the chain and drive the main driving shaft. The errors and noises of other gear wheel transmission can be avoided.
2. Imported controlling system is adopted; also it can be equipped with detecting and rejection function device for number of medicines according to the user's requirement.
3. It adopts photoelectrical controlling system to make PVC, PTP, Aluminum/Aluminum material to be automatically fed and waste side to be cut automatically to guarantee the Synchronous stability of over- length distance and multi stations.
4. It can be optional equipped with photocell correction device, imported stepper motor traction and image-character register to optimize packing grade.
5. The machine is suitable for industries of foodstuff, medicine, medical instruments, hardware, electronics and etc for packing.

### **Notes:**

1. It can be equipped color-code register sealing device.

## Technical Parameters

Cutting Frequency (Times/min)	10-33times/min
Production capacity	1980plates/hour
Max. Forming area & Depth	105*70(standard depth $\leq$ 15mm), Max. Depth 25mm
Standard Stroke range	30-80mm(can be designed as per user's requirement)
Standardplate size	80*57mm(can be designed as per user's required)
Air pressure	0.4-0.6Mpa
Compressed air required	Air compressor $\geq$ 0.3m <sup>3</sup> /min
Total power supply	220V 50Hz 2.4Kw
Main motor	0.75Kw
PVC hard Film	0.15-0.5*110 (mm)
PTP Aluminum film	0.02-0.035*110 (mm)
Cold-drawn aluminum	0.14-0.16*110 (mm)
Dialysis Paper	50-100g*110 (mm)
Mould cooling	Tap water or Recycling water
Overall Dimension	1840*590*1100 (mm)(L*W*H)
Weight	Net 425kg; Gross weight:475kg