



M-315EM

MOBILE VACUUM SEALER FOR ELECTRONICS/INDUSTRIAL APPLICATIONS

M-315EM is one of the robust single chamber models in our series. All stainless steel Mobile model (Floor model) with flat working surface. Stainless steel lid with sealing mechanism built in. Easily removable counter-beam holders for cleaning surface plate. Extra seal bar configurations are available. A Space Filler that comes with the machine enables you to adjust the usable chamber heights and net payload volume. 10 program capability offers the ultimate in process control.

QUICK FACTS



MOBILE SERIES
MODEL



CASTERS FOR EASY
TRANSPORTATION



HIGHEST PRODUCTION
THROUGHPUT SEALER



FOR MEDICAL, INDUSTRIAL, AND
ELECTRONICS APPLICATIONS

M-315EM

MOBILE VACUUM SEALER FOR INDUSTRIAL APPLICATIONS

Available Options

Gas injection

After vacuum packing and before the bag is sealed, there is an option to add gas. This is often used to extend the shelf life, as extra protection for fragile products and to prevent discolouring of specific products.

Sensor control

Instead of the number of seconds, the required end vacuum is set in percentage (0 to 99%) with this sensor. The vacuum pump extracts air until the exact pre-set end vacuum has been reached. Regardless of the volume the pre-set end vacuum will always be reached.

Trim off Seal

Easily tear off the residual plastic bag with a trim off seal.

Top and Bottom Seal

Seal bars on both the inside of the lid and on the vacuum chamber

1-2 Trim off Seal

Consists of one 3.5 mm convex seal wire and one 1.1 mm round wire.

Cushion Protection Control

Precision Control System with 20 programs



Product Specs and Applications

Contact us to learn more about this and any other product in our series

The robust, stainless steel AMAC M-315EM vacuum packer is standard equipped with a Busch vacuum pump. The machine complies with CE standards and ETL listed as an option.



[AMAC's machines are] fast and robust vacuum packing machines with a world-wide reputation.

Accessories

- Filler plates
- Service kit

Additional Features

- Flexible for various-size product
- Made of stainless steel
- Optimal hygiene and low particle counts
- Robust mobile chamber machine
- Filler plates for faster cycle & adjusting seal height


All features available in the series



Specifications Table

Machine Dimensions (L x W x H)	31 x 36¼ x 44¼" (790 x 920 x 1125 mm)
Chamber Dimensions (L x W x H)	20 x 29⅞ x 7¾" (510 x 760 x 200 mm)
Seal Bar Length	20" / 29⅞" (510 mm / 760 mm)
Vacuum Pump Capacity	70.62 CFM (120 m3/h)
Machine Cycle	15 - 40 sec.
Power	3.0 – 5.0 kw
Voltage	220/240 V – 3 phase - 60 HZ standard. Other voltage option available

Seal Bar Configurations

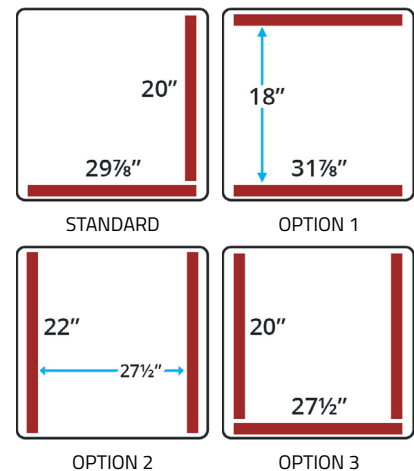

01

02