


Factory Manufacturing Small Packaging Machine

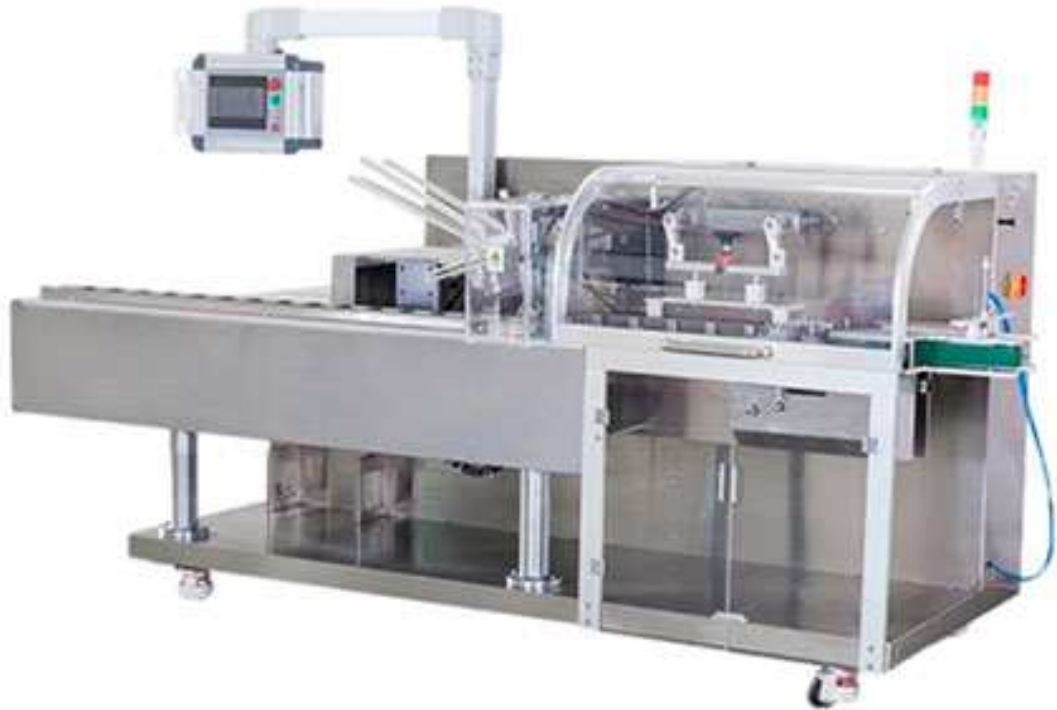

The product is unloaded according to the specified arrangement, and it automatically enters the sorting point mechanism. After the point is completed, the product enters the synchronous belt of the cartoning machine. With all the functions of pushing, inserting and sealing, the machine is estimated to save six people and increase production efficiency by about 1.5 times.

Features:

1. Power supply: single-phase AC 220V/50 HZ.
2. PLC uses Mitsubishi products.
3. Host material: The host uses a 40×60 square tube, and the parts in contact with the product and the shell are made of stainless steel.
4. Pneumatic valves and cylinders use Yadeke products.
5. The solenoid valve uses Yadeke products.
6. The touch screen adopts Weilun products.
7. Other electrical parts not mentioned are imported brands or joint venture brands.

Technical Parameters:

| Product Name | Cartoning Machine |
|----------------------------------|---|
| Paper requirements range | 300g/m ² ≤ Best paper quality: 350g/m ² ≤450g/m ² |
| Other requirements | Carton indentation is not less than 0.4mm, with pre- folding effect, no glue leakage in the box |
| Total power of the whole machine | 1.2KW |

| | |
|----------------------------|-----------------|
| Cartoning machine capacity | 20-30 boxes/min |
| Machine weight | 1.2 T |