




RFXG-40A Hot Filling, Sealing and Capping Machine

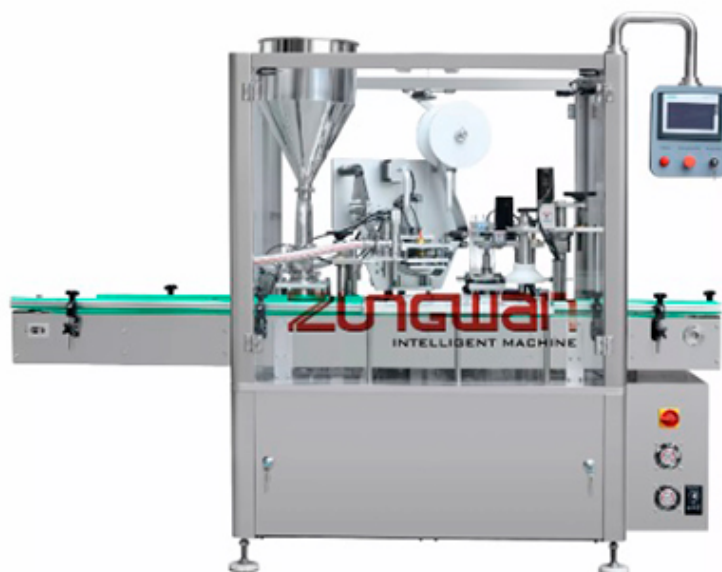

Hot filling, sealing and capping machine applies to pharmaceuticals, foodstuff and chemicals industries; the machine has the function of filling with heat preservation, sealing film on bottle, covering and locking automatically. The material is high viscosity ointment. The control system of the machine adopts technology of PLC and human – machine operation interface, which with the feature of compact structure, easy operation, stable performance.

Main technical parameter:

Main motor power	0.4KW
Pusher servo power	0.4KW
Production capacity	30-40 pcs/min
Power supply	1P 220V 50HZ
Compressed air	0.6~0.8Mpa
Sealing temperature	245C
Filling volume	45~250ml
Filling accuracy	$\leq \pm 1\%$
Dimension	1755*1280*1830mm (not include conveyor and cover neatenng device)
Machine weight	600kg
Total power	2KW