

SWP-400B

Cellophane Overwrapping Machine

Wrap finished cartons in transparent film with controlled folding and heat sealing. SWP-400B offers adjustable speed and size-specific molds for the required carton format.



PACKAGING SAMPLE / REFERENCE



Overwrapped retail carton samples

Transparent film overwrap around the closed carton


Original SWP-400B gallery. Printed samples illustrate the packaging format; final dimensions and tooling require confirmation.

A closer look at SWP-400B

Original model-specific views. Configuration details are subject to the agreed supply scope.




Folding and transfer section

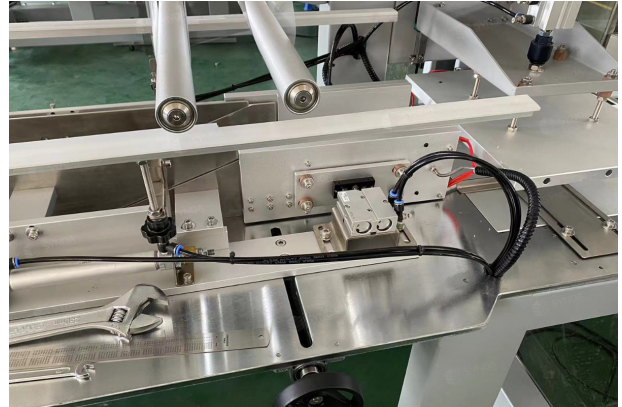

Film mechanism



Carton conveyor

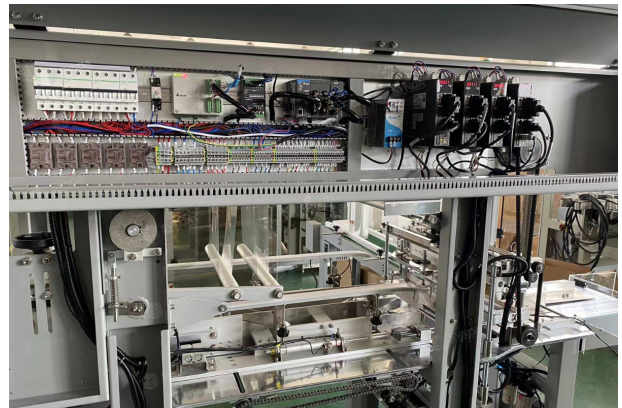

Internal mechanism

Process at a glance

1. Convey the carton / 2. Feed and cut the film / 3. Fold and heat-seal / 4. Discharge the overwrapped pack

Confirm heat-sealable film, tear tape and molds against your box samples. Barrier performance depends on the film and completed package.

Technical specification

Reference figures for SWP-400B. Confirm the selected configuration before ordering.

Listed wrapping speed	10-40 packs/min
Supply voltage	220 V, 50 Hz
Motor power	1.5 kW
Heater power	4.5 kW
Dimensions, L × W × H	2,350 × 1,050 × 2,100 mm
Weight	700 kg
Listed carton size range, L × W × H	100-350 × 50-240 × 30-120 mm
Wrapping material	Compatible heat-sealable transparent film; sample approval required

Application confirmation

Carton dimensions and samples, film structure and thickness, tear-tape requirements, output target and local electrical supply.

Reference information only. Output depends on the product, package and configuration. Final specifications, sample compatibility and supply scope must be agreed in the technical proposal.

Discuss SWP-400B with SyndaPack

[Request a configuration](#)