
WRAPPER 4000T

SPECIAL FEATURES

- High speedLow and easy maintenanceLink abilityHigh productivity



- Link ut
- Line Drawing of the Pack

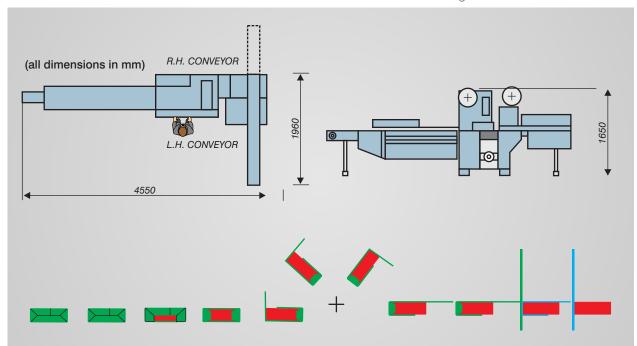

SPECIFICATIONS


Pack Size (L x W x H)	Max. (120 x 50 x 30)mm Min. (55 x 30 x 10)mm
Total Power Consumption	3.3 KW
Electricals	220 V A.C, 1 PH, 50 HZ
Speed	Upto160 PPM (machine speed and accuracy is dependent of quality of packing material, soap size and its quality, uniform inflow of the product)
WRAPPING MATERIAL	
For Stiffener –CARD PAPER / POLY LAMINATE	PAPER / POLY / HOT MEAL LAMINATION
Maximum Reel Width (Packaging Material Dimension)	150 MM
Maximum Reel Diameter(Packaging Material Dimension)	600 MM
Core Dia of Reel	76 MM
Bare Machine Size (L X W X H)	4440 x 1800 x 1760
Packed Machine Size (L X W X H)	144" x 42" x 85"
Bare Machine Weight	2040 kg
Packed Machine weight	2760 kg
Packed Conveyor Size (L X W X H)	75" x 20" x 25"
Bare Conveyor Weight	220 kg
Packed Conveyor Weight	320 kg




KHOSLA MACHINES PVT. LTD. B-17, Industrial Area, Phase-2, Mohali 160 051, Punjab, INDIA.

Technical specifications may vary because of continuous development

TELEFAX : 91+172+2225587 Website : www.khoslamachines.com E-mail : info@khoslamachines.com

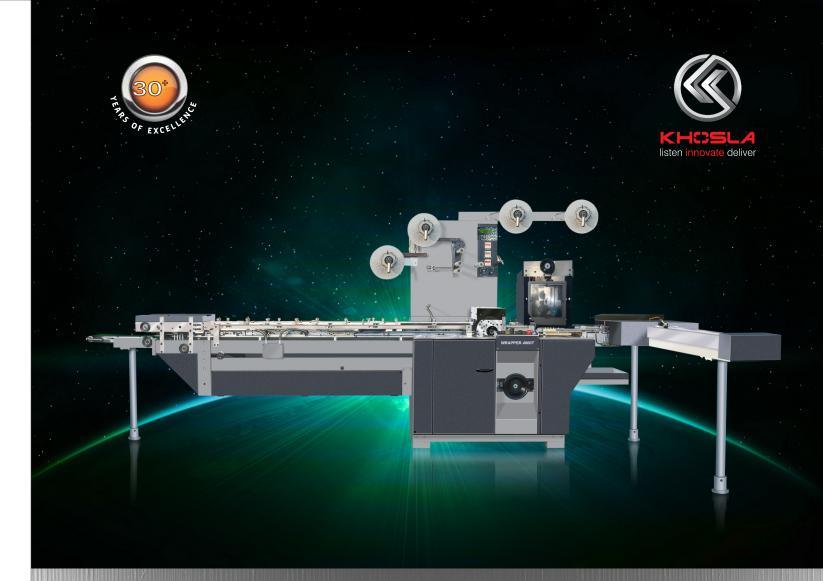

WRAPPER 4000T TOILET SOAP WRAPPING MACHINE

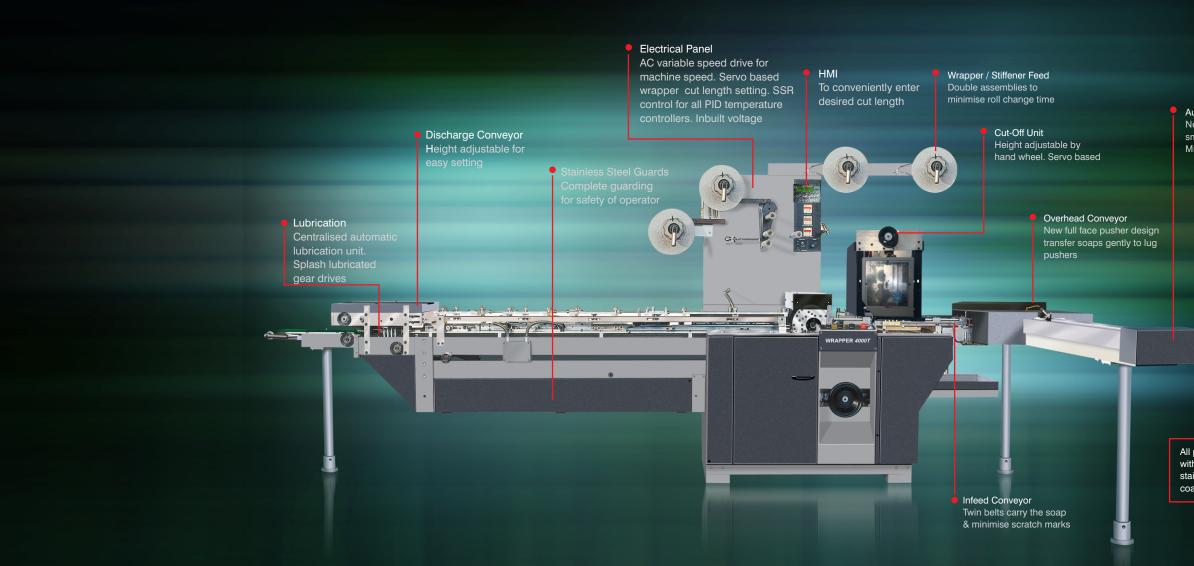

STANDARD FEATURES

- Heavy cast iron structure for vibration absorption and durability.
- No product No-wrap interlock.
- · Cut off height setting by means of handwheel.
- Discharge height setting by means of handwheel
- Automatic Print Registration Unit by means of imported sensor.
- PID temperature controls from Honeywell or equivalent make.
- VFD speed control.
- The machine speed upto 160 ppm (machine speed and accuracy is dependent of quality of packing material, soap size and its quality, uniform inflow of the product)
- Heavy distortion free cast structure

OPTIONAL FEATURES

- Collation Unit for wrapped soaps for easy collection on discharge conveyor.
- Stainless steel guarding.
- Double Spool Holders for stiffener and wrapper.
- Change parts
- · Centarlised lubrication unit.
- Tool Kit.
- Emergency Spares kit.
- Customised infeed conveyor.
- Web break interlock.
- Mirror image orientation to allow single operator to run two machines.



OUR OTHER MACHINES FOR SOAP WRAPPING

- Wrapper 8000T : 6 Servo based, high speed toilet soap wrapping machine
- Wrapper 4000
- ABM3100
- Finseal 2040
- : Automatic banding machine for soap
- : Pouch pack machine for soap in 2x2 or 3x3 collation



Autofeed Conveyor

Newly designed autofeed gives smooth movement of soaps. Minimises damage to toilet soap.

All parts in contact with soap are of stainless steel or coated with Teflon

: Detergent bar wrapping machine