


Flat Type AL/PLx,AL/AL Blister Packing Machine DPP260K

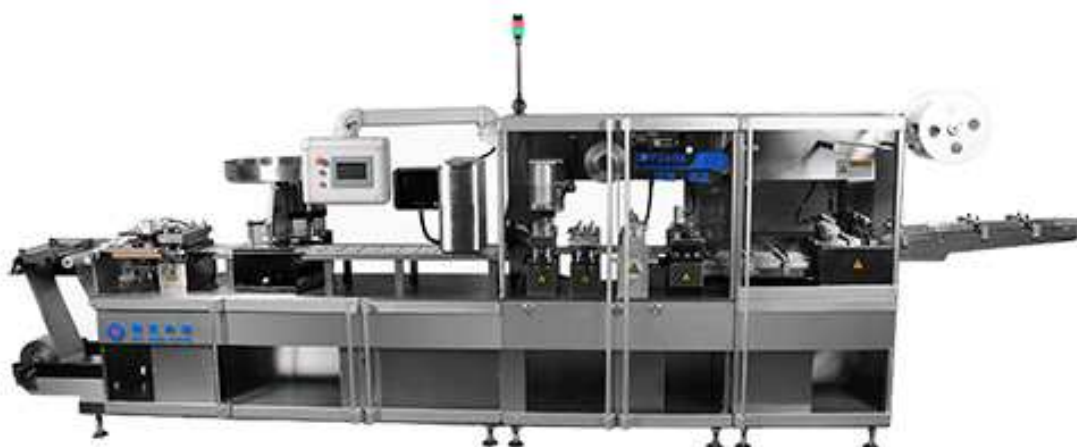

Fission Combination Structure: accessible to elevators or renovated clean workshops. Length of stroke by digital control, running speed directly set on human-machine interface according to the material feeding conditions. Printing Register, Missing Pills Rejection Device.

Technical Parameter:

Capacity(Cycle/min)		AL/PL≤70,AL/AL≤40
Range of stroke(mm)		40-120
Packing material	Pharmacy PVC(mm)	(0.2-0.5)×260
	PTP alu foil(mm)	(0.02-0.05)×260
Cold form alu(mm)		(0.09-0.15)×260
Clean compressed air(pressure)		0.5~0.7Mpa
Air consumption(m ³ min)		≥0.3
Power		AC380V 50HZ 9.5 KW
Water chiller for moulds		1.5P with 60L/h consumption
Overall dimension(L×W×H)(mm)		4700×820×1820
Net weight(kg)		2800