### Horizontal Flow Wrapper

# Series 150

Performance Output Units wrapped and sealed at speeds up to250 ppm

HS150M



#### Applications

fresh, frozen, & prepared foods produce consumer goods

#### **Technical Specifications**

Performance Output Up to 250 ppm —based on a 6" bag run in a 2-up configuration

Dimensions Machine Size (Approx.) 151" Length Width 41″ 65" Height Infeed Conveyor 94″ Length Feed Space 54″ Height above floor 37" **Product Discharge** 24" Standard

Conveyor 24" Standard 48" Optional Weight

1200 lbs base machine

Utility Connection Electric 230V, 3PH, 60Hz Air HS150: 2CFM @ 80 PSI



#### Packaging Specifications

Wrapping MaterialMax. Roll Diameter13"Max. Roll Width20" Standard30" Optional

Fin Seal Assembly(length seal)First setPullingSecond setSealingThird setPulling/Fold over

End Crimper (cross seal) 1-up x 8" wide Standard 1-up x 10" & 12" wide Optional Film Types polyester polypropylene printed or clear film perforated film

meril

#### **Standard Features**

Touch screen monitor Program up to 15 products Available in both left-to-right and right-to-left product flow Powder coated frame Food contact approved conveyor Overload clutch on crimpers

#### **Optional Features**

USDA-compliant infeed conveyor Stainless steel covers Relieved upper crimper shaft 2-up end crimper Roller rider conveyor Dual parent roll Extended infeed sections Dual pitch infeed conveyor Stainless steel frame & shafts Printer / code date interface Electric eye film registration Air opening and closing heated fin wheels (requires compressed air, 1 CFM @ 80 PSI)




2001 County Line Road Warrington, PA 18976 USA **AmeriPak.com** 

Ph215-343-1530Fax215-343-1633

## Horizontal Flow Wrapper Series 150

Built to last, Wide range of product sizes, Easy changeover

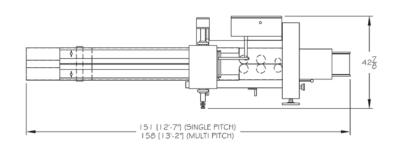

#### Overview

AmeriPak's exceptionally adaptable Series 150 is designed for easy operation. A cantilevered self-centering parent roll backstand is conveniently located above the adjustable or fixed former.

Unique to the Series 150 is a generous product size range including a wide film capacity backstand and end crimper which allows greater product size flexibility. Our heavy duty end crimper drive assures high performance end sealing and cut-off.

The Series 150 is easily customized to meet specific packaging needs and is available in right or left hand configurations.



Quick Changeover | Simple machine control layout and adjustable former.

#### H150M Horizontal Flow Wrapper

The H150M's unique EZ-SET end crimper phasing control allows the operator to position the crimper between products during initial setup, then easily fine tune the setting—all while the machine is running. Most size changes do not require tools. It is powered by a robust 1 HP AC drive motor with plenty of reserve power to drive feeding devices and other accessories. Also available as a shrink wrapper. The shrink version requires compressed air (2 CFM @ 80PSI).

Standard Features			Seal Style				
Model	Drive	PPM	Touch Screen	Crimp	Bead	Food Safe	Feed Space
H150M	mechanical (M)	150	•	•		•	54"
HS150M	mechanical (M)	150	•		٠	٠	54"

#### **Optional Accessories**

Lazy Susan (rotary turn table) Adjustable side table Spare parts kit



**Request for Quote** 

Ph 215-792-7272 Email Sales@AmeriPak.com Memberships100PMMISchool Nutrition AssociationMidAtlantic Employers Association