


Flat Type AL/PL, AL/AL Blister Packing Machine DPP260TI

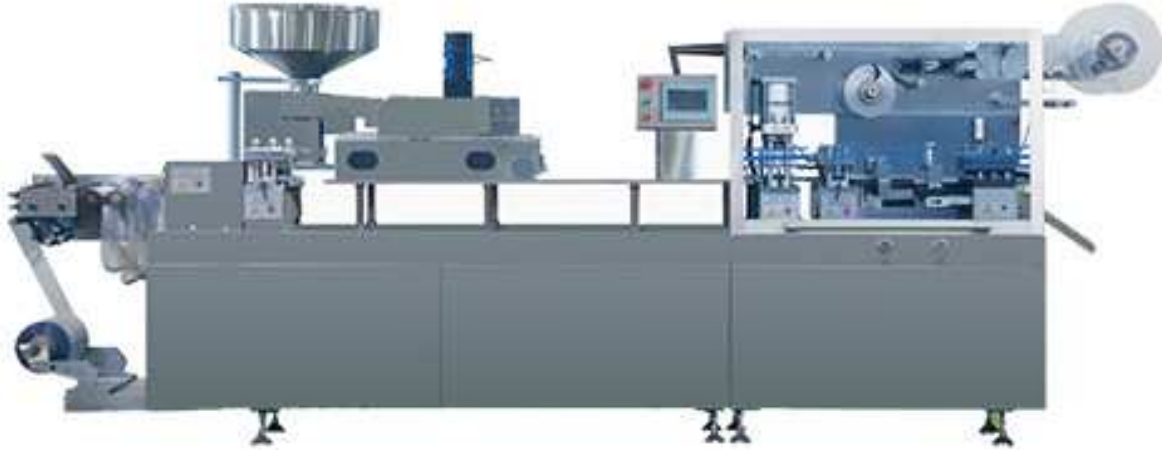

Fission Combination Structure: accessible to elevators or renovated clean workshops. Length of stroke by digital control, running speed directly set on human-machine interface according to the material feeding.

Missing Pills Rejection Device, Printing Register Control.

Technical Parameter

Capacity(Cycle/min)	AL/PL≤60 AL/AL≤40	
Range of stroke(mm)	40-120	
Packing material	Pharmacy PVC(mm)	(0.2-0.5)×260
	PTP alu foil(mm)	(0.02-0.05)×260
	Tropical alu(mm)	(0.09-0.15)×260
Clean compressed air(pressure)	0.5~0.7Mpa	
Air consumption(m ³ min)	≥0.3	
Power	AC380V 50HZ 9KW	
Water chiller for moulds	Tap water or recycle water with 60l-/h consumption	
Overall dimension(L×W×H)(mm)	4420×710×1700	