


# Lacquer and Label Machine LL-60

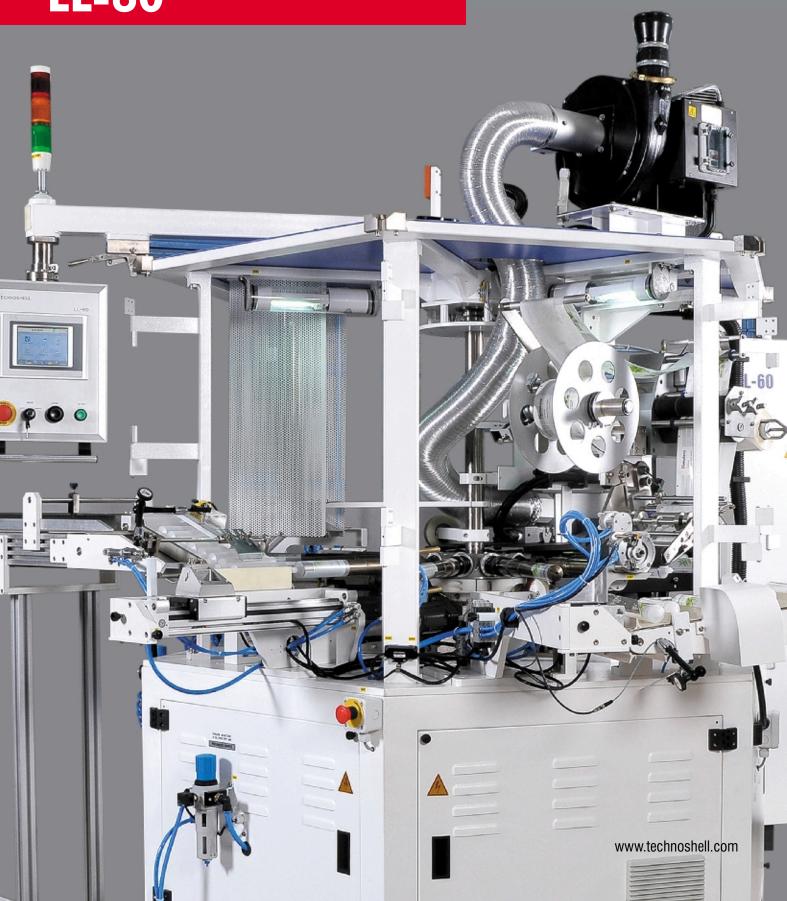

## Lacquer and Label Machine

## **LL-60**

#### For Applying Lacquer & Label on Cosmetic Tubes

- In the present days competitive market, many tubes are being labeled to have very good graphics on the tubes. Our machine Lacquer & Label Machine: LL-60 has been specially designed to meet this requirement.
- LL-60 is unique in its application as it is the first time that a machine with lacquering and labeling application on tubes is offered.
- This compact machine is developed for high speed label applications and can apply paper, PVC, opaque & transparent labels.
- The various operations that are possible on this unique machine are flame / corona treatment, UV lacquering, UV curing and label application.
- The indexer and label head are servo motor operated and the machine functions are controlled by a state-of-the-art controller with a touch screen.
- The machine is distinguished by its high performance, simple operation, quick change-over and low maintenance.
- Combining the LL-60 with our Capping Machine CP-60 could help you to set up a dedicated production line for labeled tubes.

#### **Features**

- Rigid construction and simple operation
- Few change parts for different tube sizes
- UV curing
- Quick & easy change-over for different tube sizes
- State of the art controller system
- Rejection of faulty tubes
- i TUBE TEST MODE to make the machine settings with minimum wastage
- Recipe feature for fast recall of different tube settings
- Exhaustive diagnostic features and alarm system
- Multiple language option\*
- Modem for tele-service (optional)





<sup>\*</sup>Depends on availability of language font

## Operations



Loading Station



Flame/Corona Treatment



Lacquering



**UV** Curing



Labelling



Unloading



Operator Panel



Control Panel

## Applications







### Technical Specifications

Tube size : Diameter 25 to 60mmTube length : 75 mm to 200mm

• Number of Mandrels : 12 Nos.

Output\* : Upto 60 tubes per minute

Label wrap around : Upto 355°
 Label roll diameter : Upto 250mm
 Memory storage : Upto 500 recipes

Pneumatic connection : 6.5 to 8 bar, oil and water free

Electrical connection : 3 x 415 V, 50 Hz, 9 KW

Operation : Fully automaticStandard paint : RAL 9016 white

\*Depends on diameter, labeling speed, quality of lacquer & label

Due to continual improvements specifications and features are
subject to change without notice

Label graphics shown under application heading are the property and trade mark of the respective brands

## Layout:

