


MB-600AS Semi-Automatic Packaging Machine Prop Wrap Film

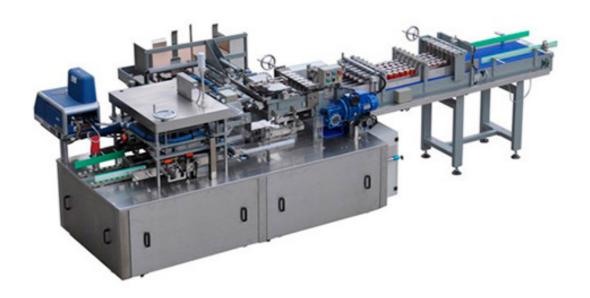

Advantages:

- The aircraft used in the pallet with film packaging, widely used in drinks, beer, chemical, food, pharmaceutical and other industries.
- The whole pneumatic expansion support film roll, for the film quickly takes about two minutes to change the film.
- The film tension transportation, smooth, and precise control of the cutting film neat incision.
- Serve control technology can maintain the mechanism of precise synchronization of advanced, reliable delivery.
- The heating box, reasonable structure, heat insulation, high precision of temperature control.
- Supporting German Siemens, Germany P+F, Japan SMC, Italy motorcycle Rio, the world's most advanced control
- System components, equipment, stable operation.
- Mechanical transmission components using after heat treatment of stainless steel or carbon steel and other materials; spraying the surface quality,
- The antirust performance.

Technical data:

Deice dimensions	13500×1215×2150H mm
Max size of packaging	L420*W280*H350
Shrink film materials	PE、PVC、POF
Shirnk film thickness	80~90um
Highest yield per minute	The 35-40 package (continuous variable speed)
Highest yiled	The heating box (48kW 48kw/220v temperature, heat 24kw)
	The mechanical part of the power of 10kw
Compressde air pressur	0.4~0.7Mpa; gas; 0.25NM3/min
Conveyor belt largest	600mm, height of 1120~1185 (mm) (adjustable)
Voltage requirements	380/220V
Equipment	6500kg