




Auto Servo Blister Machine SVB-5000

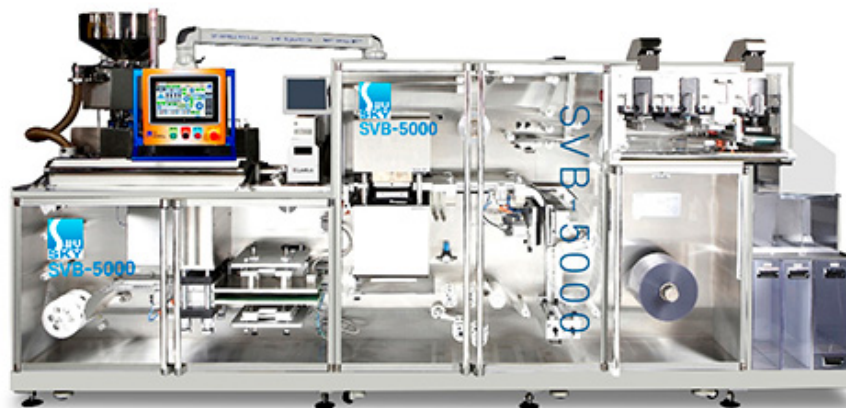

High Speed, Servo Control, Compact Design, Various Options available, Quick Change over

Highlights

- Bosch servo motor application
- Applicable design for easy mold replacement without tools
- Applied forming film tensioning device
- Leveler device (To supply cartoner to prevent errors)

Specification

Empty Machine Speed(2-lanes/mi)	Max. 400 blisters
Production Speed	40% ~ 80% of empty machine speed
Forming area	210 X 270 mm
Forming depth	max. 12mm
Punching speed	max. 200 cycles/min
Punching length	Basically max. 95 mm
	(can be customized with sample size accordingly)
Reel diameter (Forming material)	max. 600 (max. width : 190 mm)
Reel diameter (Lib material)	max. 250 (max. width : 190 mm)
Processable forming materials	PVC, PVC/PVDC, PVC/Aclac, Alu, PET, COC (0.25~0.40mm)
Processable lid foils	Alu, Alu/Paper, etc (0.018~0.022mm)
Dimension (L x W x H)	4430 x 1296 x 2050 mm (Approx.)
Weight	3,600 Kg (Approx.)
Required power	30 Kw (Approx.)
Electric spec	380V, 50/60Hz, 3PH
Air consumption	400 liters/min, 6~8kg/air