

HS150 Shrink Film Wrapper




Performance Output
Units wrapped and sealed
at speeds up to 250 ppm

Applications	Style	Film Types
fresh, frozen, & prepared foods produce consumer goods	extended end seal (crimp) [H150M] bead seal [HS150M]	polyester polypropylene printed or clear film perforated film
Technical Specifications	Packaging Specifications	Standard Features
Performance Output Up to 250 ppm —based on a 6" bag run in a 2-up configuration Dimensions Machine Size (Approx.) Length 151" Width 41" Height 65" Infeed Conveyor Length 94" Feed Space 54" Height above floor 37" Product Discharge Conveyor 24" Standard 48" Optional Weight 1200 lbs base machine Utility Connection Electric 230V, 3PH, 60Hz Air HS150: 2CFM @ 80 PSI	Maximum Package Size (Not tolerated simultaneously) Length 4" – 16" Width 1/2" – 9" Height 2 5/8" Standard 4" Optional Wrapping Material Max. Roll Diameter 13" Max. Roll Width 20" Standard 30" Optional Fin Seal Assembly (length seal) First set Pulling Second set Sealing Third set Pulling/Fold over End Crimper (cross seal) 1-up x 8" wide Standard 1-up x 10" & 12" wide Optional	Touch screen monitor Program up to 15 products Available in both left-to-right and right-to-left product flow Powder coated frame Food contact approved conveyor Overload clutch on crimpers Optional Features USDA-compliant infeed conveyor Stainless steel covers Relieved upper crimper shaft 2-up end crimper Roller rider conveyor Dual parent roll Extended infeed sections Dual pitch infeed conveyor Stainless steel frame & shafts Printer / code date interface Electric eye film registration Air opening and closing heated fin wheels (requires compressed air, 1 CFM @ 80 PSI)

HS150 Shrink Film Wrapper

Built to last, Wide range of product sizes, Easy changeover

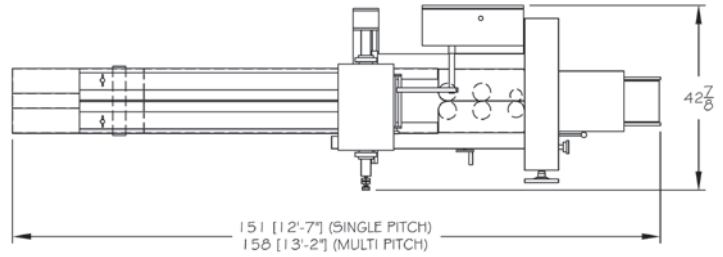

Overview

AmeriPak's exceptionally adaptable Series 150 is designed for easy operation. A cantilevered self-centering parent roll backstand is conveniently located above the adjustable or fixed former.

Unique to the Series 150 is a generous product size range including a wide film capacity backstand and end crimper which allows greater product size flexibility. Our heavy duty end crimper drive assures high performance end sealing and cut-off.

The Series 150 is easily customized to meet specific packaging needs and is available in right or left hand configurations.



Quick Changeover | Simple machine control layout and adjustable former.

H150M Horizontal Flow Wrapper

The H150M's unique EZ-SET end crimper phasing control allows the operator to position the crimper between products during initial setup, then easily fine tune the setting—all while the machine is running. Most size changes do not require tools. It is powered by a robust 1 HP AC drive motor with plenty of reserve power to drive feeding devices and other accessories. Also available as a shrink wrapper. The shrink version requires compressed air (2 CFM @ 80PSI).

Standard Features

Model	Drive	PPM	Touch Screen	Seal Style		Food Safe	Feed Space
				Crimp	Bead		
H150M	mechanical (M)	150	●	●		●	54"
HS150M	mechanical (M)	150	●		●	●	54"

Optional Accessories

- Lazy Susan (rotary turn table)
- Adjustable side table
- Spare parts kit



Request for Quote

Ph 215-792-7272
Email Sales@AmeriPak.com

Memberships

- PMMI
- School Nutrition Association
- MidAtlantic Employers Association