



# CS-TT

**Advantage Machinery**™



Model	CS-TT
Description	Top & Bottom Case Sealer with Top & Bottom Driven Belts
Case Size LxWxH (in)	(6~∞) x (7.1~22.75) x (4.75~18.9)
Tape Size (in)	2 - 3
Max. Speed (pieces/ min)	20
Power (Volt/ Ph/ Amps/ Kw)	220/ 1/ 5/ 0.5
Machine Dimensions LxWxH (in)	45 x 44 x 60
Weight (Lb.)	455



[www.advantage-machinery.com](http://www.advantage-machinery.com) Ph: (305) 593-9030 Fax: (305) 593-9031 e-mail: [sales@garridousa.com](mailto:sales@garridousa.com)  
7258 NW 66th St Miami, FL 33166 USA




# Case Sealer Series

**Advantage Machinery**™

The Advantage Machinery Eco-Tape system is a combination of the semi-automatic case erector, model CE-10M, the semi-automatic case sealer model CS-TD and a flexible conveyor. This system allows a single operator to form the case, fill and seal it. This economical solution was designed to save companies labor cost in the final packaging stages of their production. Advantage Machinery offers a large line of case sealing equipment. The standard model is the CS-TD. It is a top and side belt driven machine. The tape is applied on both the top and bottom. The CS-TD is made of rugged construction and is easy to use. Also available are Random Case Sealers, High Speed Case Sealers, Sealers with Top Closing Fixtures, Stainless Steel Models and much more. All machine come equipped with heavy duty belts, castors, replaceable tape heads that are suitable for tape between 2" - 3".

**Eco Tape**

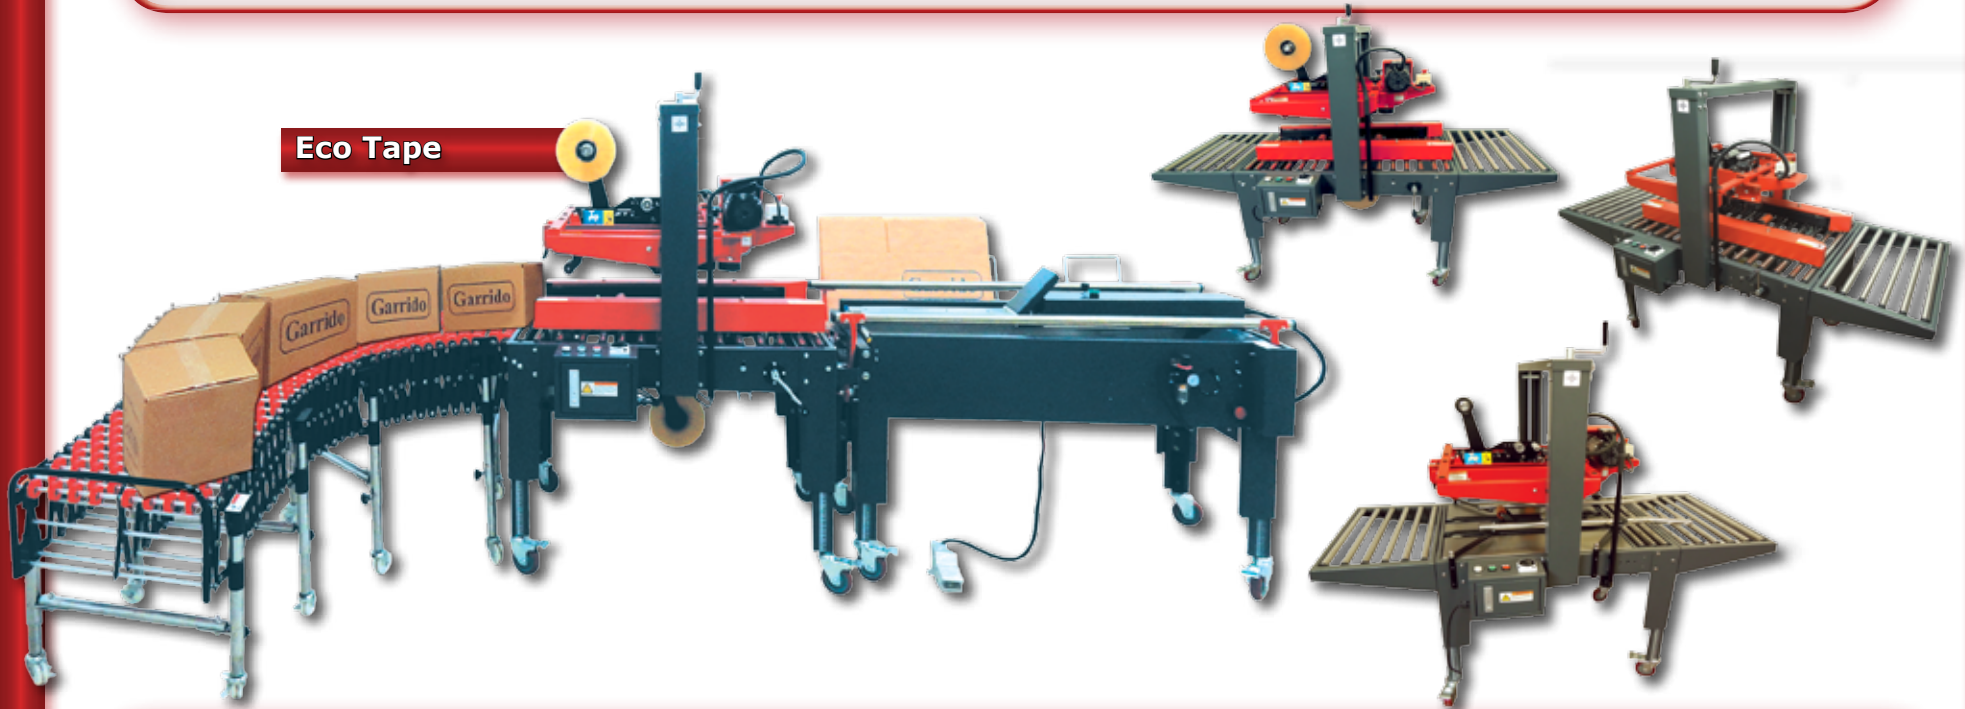

Model	CS-TD	CS-TS	CS-TT	CS-TSA	CS-TSC
Description	Top & Bottom Sealed, Top & Side Driven	Top & Bottom Case Sealer with Side Driven Belts	Top & Bottom Case Sealer with Top & Bottom Driven Belts	Top & Bottom Sealed, Side Driven, Automatic Height & Width Adjustment	Top & Bottom Sealed, Side Driven, Automatic Folds the Top Flap
Case Size LxWxH (in)	(6~∞)x(4.7~18.9)x(4.7~18.9)	(6~∞)x(4.7~18.9)x(4.7~18.9)	(6~∞)x(7.1~22.7)x(4.7~18.9)	(6~∞)x(4.7~19.6)x(4.7~17.7)	(7.9~21.6)x(6~18.9)x(4.7~18.9)
Tape Size (in)	2 - 3	2 - 3	2 - 3	2 - 3	2 - 3
Max. Speed (pieces/ min)	30	30	20	15	15
Power (Volt/Ph/Amps/Kw)	220/ 1/ 5/ 0.5	220/ 1/ 4/ 0.4	220/ 1/ 5/ 0.5	220/ 1/ 4/ 0.4	220/ 1/ 4/ 0.4
Machine Dimensions LxWxH (in)	43 x 35 x 50	43 x 35 x 50	45 x 44 x 60	45 x 40 x 49	73 x 39 x 54
Weight (Lb.)	551	507	455	661	661



[www.advantage-machinery.com](http://www.advantage-machinery.com)

Ph: (305) 593-9030 Fax: (305) 593-9031  
7258 NW 66th St Miami, FL 33166 USA

e-mail: [sales@garridousa.com](mailto:sales@garridousa.com)