




PXDBGY series Glass Bottle Beer Washing, Filling and Capping Three in One Machine

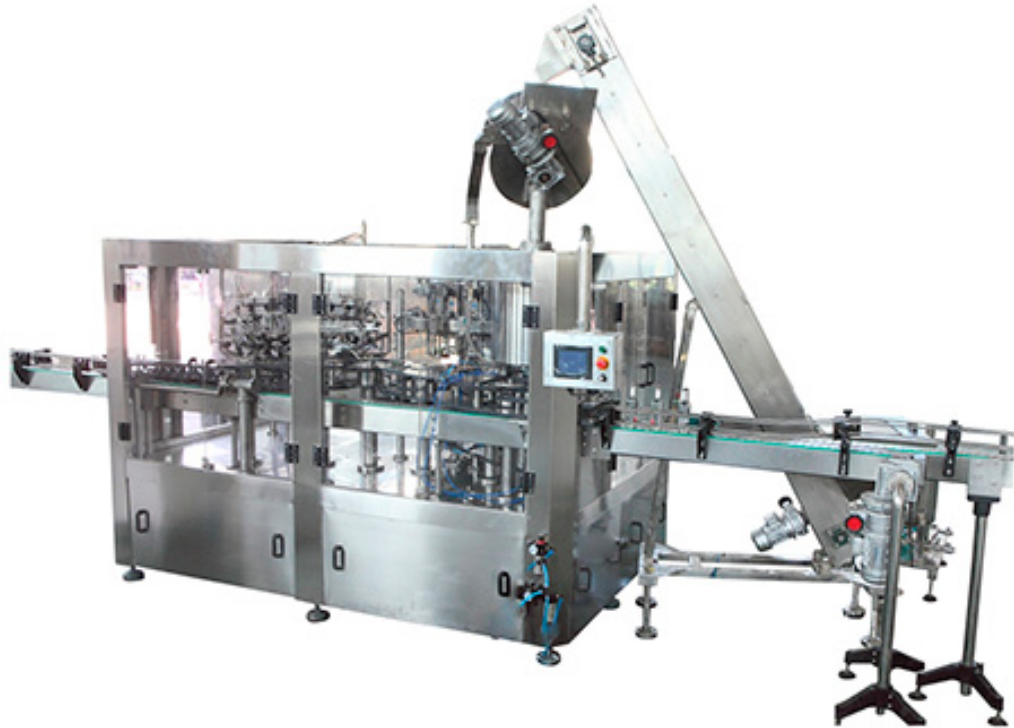

This series of products adopts the internationally popular technology of "secondary vacuum pumping and high-pressure foaming" to minimize the oxygen content of beer and greatly improve its taste. Precise pressure control and automatic detection of glass bottles ensure that the beer filling equipment maintains perfect quality at all times. This equipment is designed and developed with German technology and combined with the characteristics of China's beer production industry. The machine has excellent operational reliability, complete functions such as flushing, filling, capping, disinfection and sterilization, and can achieve sterile beer filling into sterile containers in a sterile environment, with a production capacity of 2 000 to 20 000 bottles per hour.

Technical Parameters

主要技术参数 Main Technical parameters						
型号 Type	PXDBGY1412-1	PXDBGY18186	PXDBGY24246	PXDBGY32328	PXDBGY404010	PXDBGY505012
生产能力(B/H) Proouctive capacity (330ml)	1000-1500	3000-5000	6000-8000	8000-10000	12000-15000	15000-18000
冲灌压盖头数(头) Heads of rinsing, filling&capping	14-12-1	18-18-6	24-24-6	32-32-8	40-40-10	50-50-12
适用瓶高 (mm) Suitable bottle height	160-340					
适用瓶径 (mm) Suitable bottle diameter	Φ50-Φ100					
冲瓶供水压 (MPa) Water pressure supply	0.25-0.3					
灌装形式 Filling way	等压灌装 Balanced Pressure filling(一、二次抽真空 twice vacuumized)					
灌装温度 (℃) Filling temperature	0-5					
灌装压力范围 (MPa) Filling pressure	0.15-0.5					
主传电动机功率 (kw) Main motor power	2.2	3	4	7.5		11
总功率 (kw) Total power	2.75	3.18	4.18	7.68		
外形尺寸 (mm) Overall dimensions	2700×1500×2300	3012×2012×3260	3280×2420×3200	4430×2880×3200	4650×3200×3200	4987×3846×3200
重量 (kg) Weighe	2800	3800	5000	6800	8800	11000