


AMERIPAK[®]

a division of O.P. Schuman & Sons,

MODEL 3500 HORIZONTAL WRAPPER

- **For High Speed Applications**
 - **Rugged Servo Drive**
 - **Dependable**
 - **Precise Size Control**

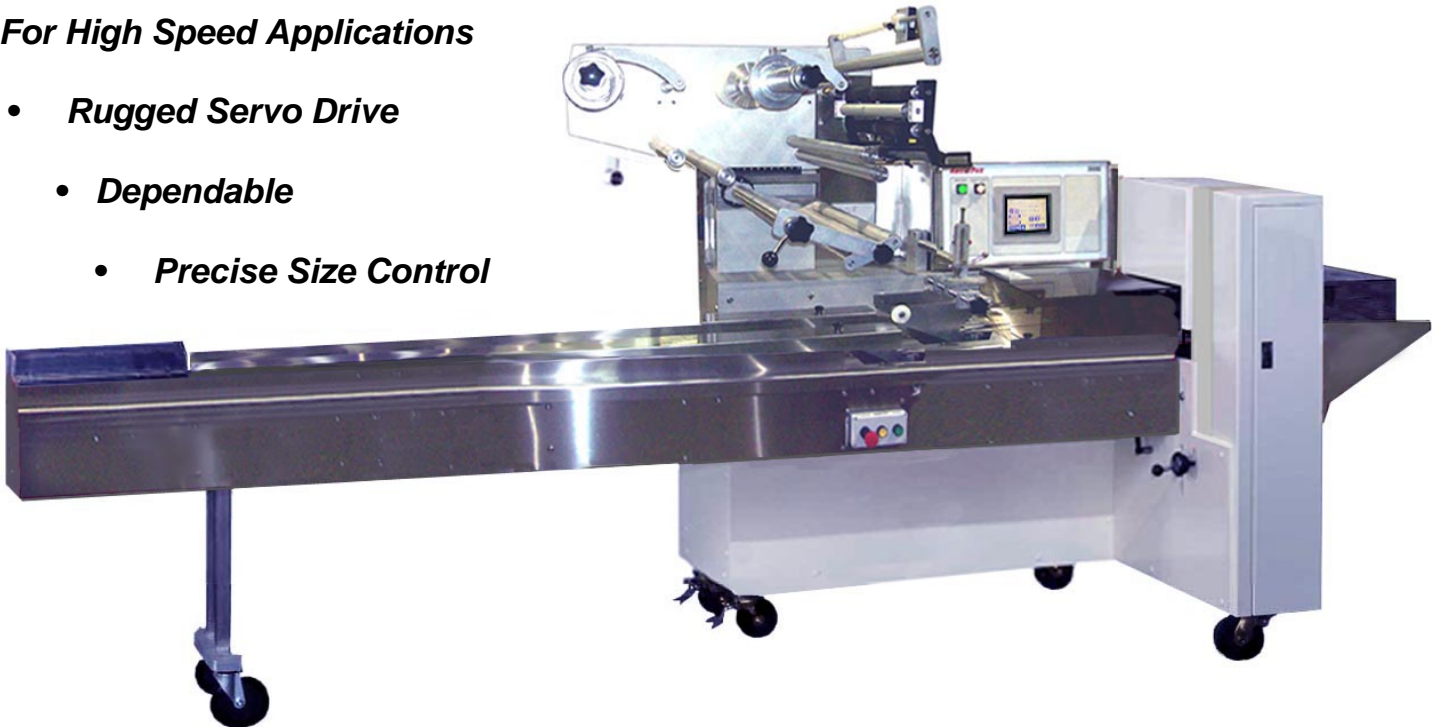

Designed for high speed, multi-shift operations, the Model 3500 horizontal wrapper is the ideal choice where performance and reliability are required. Constructed with a heavy duty modular frame, this machine is equally at home as a basic wrapper or as a high speed wrapper with fully automatic product feeders operating at very high speeds. The wrapper accommodates a wide range of heat sealable wrapping materials, from standard single layer films to multiple layer laminations.

Three sets of tiltable fin wheels to accurately control the film for high speed wrapping of your smallest to largest products are standard on the Model 3500. A control panel with graphic

display allows convenient monitoring and control of the wrapper

Unique EZ-SET control of crimper phasing can be set with the machine running, saving valuable set-up time and product. All the controls for changing from one sized product to another can be adjusted by hand, no tools required. Most adjustments have been placed on the front of the machine for quick size changes. These are just some of the many features AmeriPak has developed for the Model 3500 that make set-up and operation easy. Contact your AmeriPak agent to learn more about this wrapper.


AmeriPak... High Performance, Affordable Packaging

AMERIPAK[®]

a division of O.P. Schuman & Sons.

2001 County Line Road
Phone: 215-343-1530
Website: ameripak-ops.com

Warrington, PA 18976 USA
Fax: 215-343-1633
Email: joshea@opschuman.com

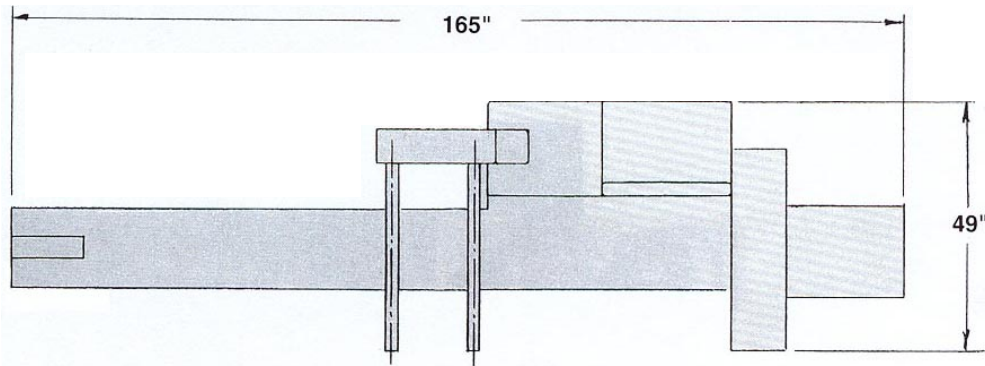**SPECIFICATIONS**

- **Machine Size**
Length – 165"
Width – 49"
Height – 69"
- **Infeed Conveyor**
Length – 104"
Width – 16"
Height – 37"
- **Wrapping Material**
Maximum Parent Roll Diameter – 13"
Roll Width – 24"
Double Parent Roll, Standard
Electric Eye Film Registration, Standard
- **Fin Seal Assembly**
First Set – Pulling
Second Set – Sealing
Third Set – Pulling
- **Fin Drive Servo Controlled**
- **End Crimper**
2-up, diameter to suit application
- **Discharge Conveyor Belt**
Length – 23"
Width – 9.5"
- **Product Flow (Facing the Control Panel)**
Left to Right, Standard
Right to Left, Optional


- **Epoxy Finish Standard**
Stainless Steel Optional
- **Package Size Range (Approx. Range)**
(cannot be tolerated simultaneously)
Length – 3" to 17"
Width – ½" to 9"
Height – up to 4"



- **Electrical**
3 HP AC drive motor
230V, 3PH, 60H
- **Weight**
2500 lbs.

OPTIONAL EQUIPMENT

- Casters
- Code Dater
- Longer Infeed
- Product Feeders
- Gusset Attachment
- Special Seal Patterns



**Three sets of individually
tiltable fin wheels mean
easily adjusted, precise
product wraps**