


DPP-260Y High Speed Blister Packaging Machine

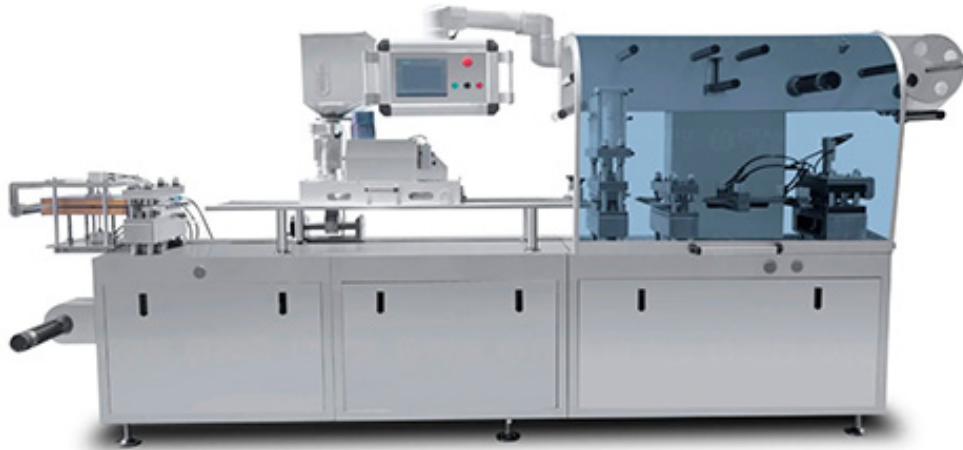

Features

- High-precision worm gear reducer for larger torque and longer service life.
- Air and water pressure controllers with alarms for low pressure.
- Main station bearings imported from Japan NSK for reliability.
- Solenoid and vacuum valves from Japan SMC for high quality.
- Silicone disc brushes improve feeding rate, increasing medicine filling by 20-30%.
- Hot extrusion steel character printing for clearer and more efficient results.

Specifications

Punching speed (aluminum-plastic):	60-100 times/min
Maximum forming area:	(240~360) ×240mm
Maximum forming depth:	14mm
Power supply and total power:	Three-phase five-wire 380V 50HZ (220V 60HZ) 20~24KW
Gas consumption:	0.06~0.09m ³ min (0.6~0.9Mpa)
Machine weight:	4000~5000Kg
Machine dimensions:	6350×1500×2000mm