


Desktop Type Penicillin Bottle Ceramic Pump Packer XQZPG-2B (Double channel)

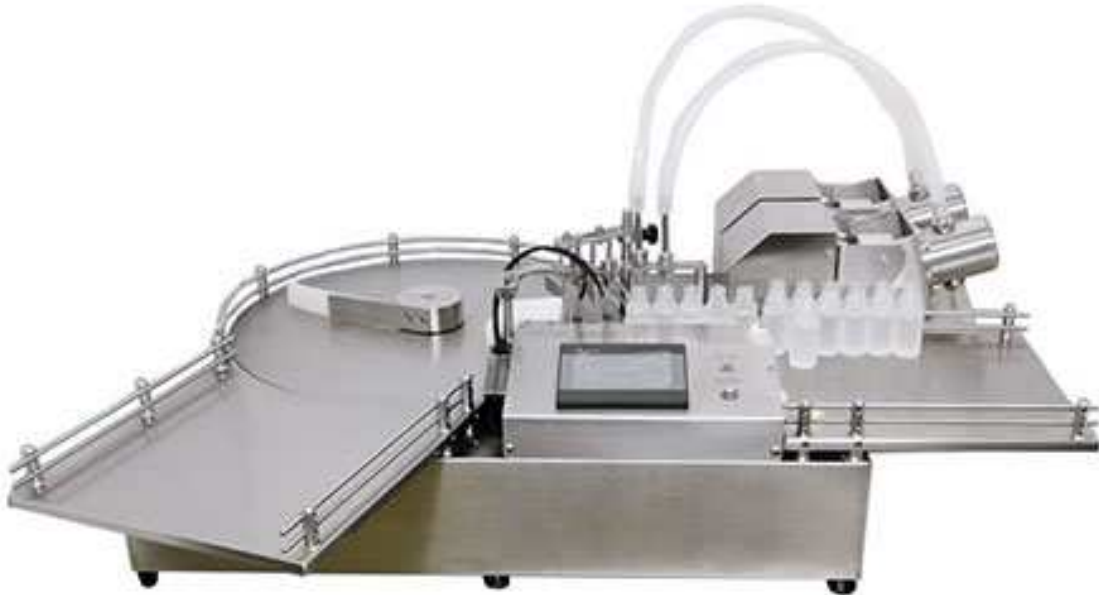

Application:

1. It is widely used in precision, quantitative loading / dilution of pharmaceutical, pharmaceutical, food, chemical, cosmetic and other industries.
2. Pre-chromatography preparation, pharmaceutical QC and R&D, environmental monitoring, mineral and blood analysis, forensic identification.
3. Used for precise quantitative loading / dilution of blood, biological reagents, oral agents, injections, advanced cosmetics, flavors, fungicides and other liquids.

Characteristic

This equipment has been tested to meet the requirements of GMP certification.

1. Adopt intelligent operating system.
2. The liquid separation part is: high purity ceramic pump, which controls the amount of liquid injected in each circle by adjusting the Angle of the pump head.
3. 304 stainless steel appearance, desktop structure, practical and convenient.
4. Especially suitable for stable bottle shape.
5. Convenient and rapid change of bottle species with different diameters.
6. Support Modbus 485 communication protocol.
7. This equipment adopts German sensor to realize the function of no filling without bottle.

Technical parameters

Model	XQZPG-2B Double channel				
Pump head	High purity ceramics				
Filling accuracy	$\leq \pm 0.25\%$				
Filling range	0.5-2ml	1.5-5ml	3-10ml	2-25ml	5-60ml
Bottle diameter	12-78mm				
Manufacturing speed	0-80PCS/min				
Size of Host Machine	1130*430*240(mm)				
Power	AC 220V 50-60Hz 650W				