


HY-TD200 Double Push Bagging Machine

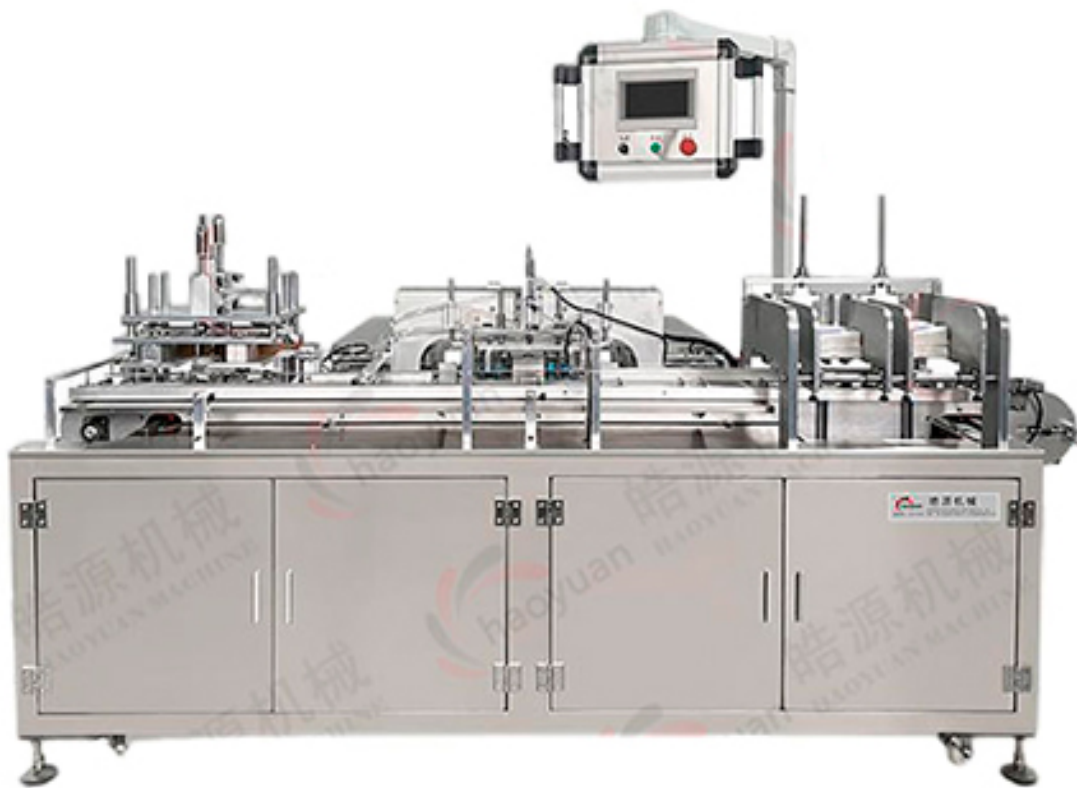

Features

1. This machine works steadily and continuously. It is suitable for sealing all kinds of masks, medical supplies, sanitary supplies, daily necessities, hardware products, food and other products.
2. Full automatic bagging, photoelectric correction, no burr, fault forming.
3. The equipment can be configured with trippers according to different types.
4. Adopting Panasonic PLC imported from Japan, the accuracy is improved and the stability of the equipment is high.
5. Intermittent sealing is better to ensure the beauty of sealing and avoid leakage.
6. This machine is easy to operate. PLC touch screen can adjust the packaging temperature and speed according to the packaging material, product thickness and length. Servo motor. Through the control of light, electricity and gas, the fault can be self diagnosed and displayed clearly. The operating system language can be Spanish, French, Korean, Russian, Japanese, Arabic and other local languages.
7. The whole machine is covered with stainless steel, with good appearance, easy to clean and durable. Low operation and maintenance cost.
8. Intelligent PLC temperature control.
9. The required number of automatic alarm reminders, the required number of automatic batching and stacking.
10. Free switching of product specifications

Technical Parameters

Model and specification	HY-TD200
Bag making size	Width: 50-150mm length: 50-300mm (design size as required)
Packaging materials	Composite films, aluminized films, polyethylene / polypropylene and other composite materials
Bagging method	Direct push and pinch push
Packing speed	40-45 bags / min
Power supply	Three phase four wire 380V & nbsp& nbsp; 50/60Hz 6.5Kw
Gas consumption It is recommended to match	w-1.0/101
Air compressor	0.5-0.8m3/min 300-500L/min
Overall weight	900Kg
Machine size	2900mm × 2470mm × 1728mm