


ID TECHNOLOGY

LSI-9130

Pressure Sensitive Labeling System for
Round Containers

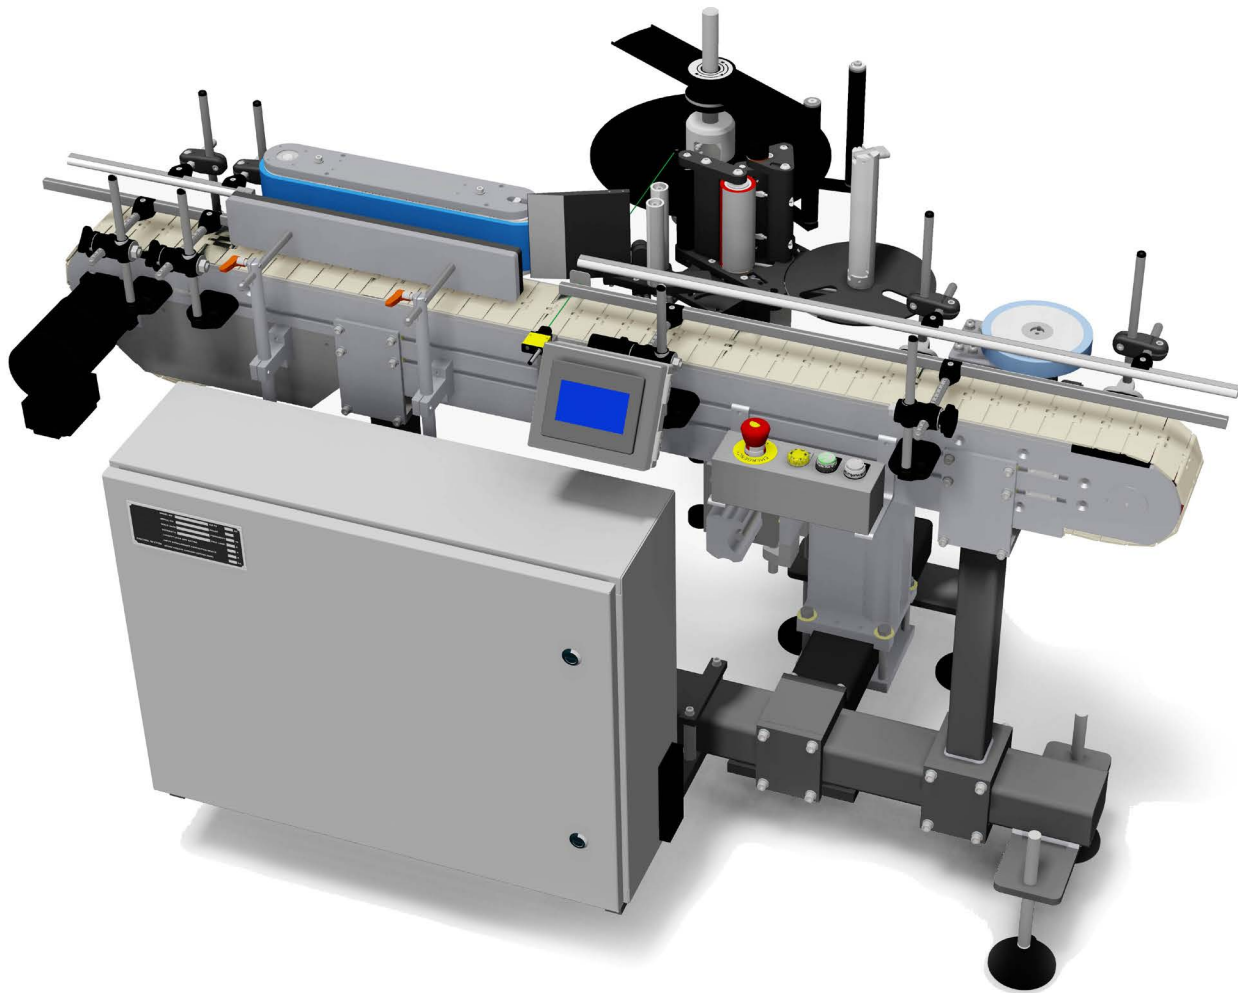

ID Technology's LSI-9130 is a pressure sensitive labeling system, designed to label round containers at speeds of up to 60 per minute.

Like all products in the 9000 Series, the LSI-9130 is simple to install operate and maintain - improving machine effectiveness and reducing costs.


L&C

LABELING
& CODING

LSI-9130 - Pressure Sensitive Labeling System

The 9000 Series is a range of robust, competitively priced labeling equipment designed to handle a wide range of applications. 9000 Series products are built in the USA, in our production facilities in Oakland, NJ, New Freedom, PA and Fort Worth, TX. With nationwide on-site support and six label printing plants, ID Technology can help streamline and enhance your labeling operations.

The 9130 is a simple, rugged labeling machine engineered to accurately apply labels to straight sided cylindrical products at speeds up to 60 containers per minute.

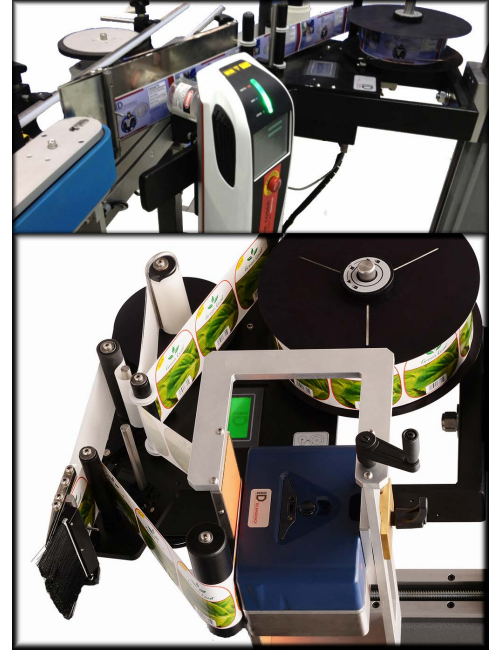

Specifications

Products

Straight sided round containers

Min: 1.5" OD x 2.5" Tall

Max: 4.4" OD x 10" Tall - Std guide rail

Max: 6.25" OD x 10" Tall - Wide Product guide rail kit

Must be stable when standing

Labels

Min: 1" Wide x 1" Feed

Max: 5" Wide x 10" Feed

3" ID Core

Copy Position #3 or #4

Paper or Film

Application Accuracy

±1/16" - 2 Sigma

Throughput Rate

Up to 60 products per minute

Equipment Specifications

Base Frame

Painted steel with adjustable leveling feet and 36" X - Y - Z adjustable labeling head mounting

Stainless steel for frame, conveyor and control cabinet (optional)

Conveyor

4.5" wide table top chain

5.5', 8' or 10' long

Conveyor height: 36" ±2"

Labeling Head

M-Series labeling head

Max dispense speed: 1200 inches/minute

Product Sensor

Polarized Retro-reflective

Label Sensor

Standard: Fork type optical sensor

Optional: Fork type clear label sensor (Label testing required)

Wrap Belt

3" Wide, 4" Wide or 6" Wide x 15"

Long

Belt Location - 0.25" to 1.75"

Conveyor to bottom of wrap belt

Controls

NEMA 12 steel control cabinet.

Variable frequency AC drive controllers for conveyor, wrap belt and spacer wheel.

Allen Bradley PLC Controls.

Pack ML compliant Color Touch

Screen allows easy adjustment

of labeling head parameters and

conveyor, wrap belt and spacer

wheel speeds.

Operator control station with start,

stop, emergency stop and on/off

selector switch for optional spacer

wheel.

Infeed Spacing

Spacer Wheel (Optional).

Overprinting

ID Technology 32D Thermal Transfer Overprinter (Optional).

ID Technology Macsa iCON Laser Coder (Optional).

Utility Requirements

Electrical: 120V 60Hz 10A.

Air: Non required.



*Complimentary
Lifetime Equipment Warranty*

Complementary Lifetime Warranty

For customers using ID Technology labels on our labeling equipment, we offer a lifetime limited equipment warranty.

