


## Liquid Filling & Rubber Stopping Machine LF 2000S

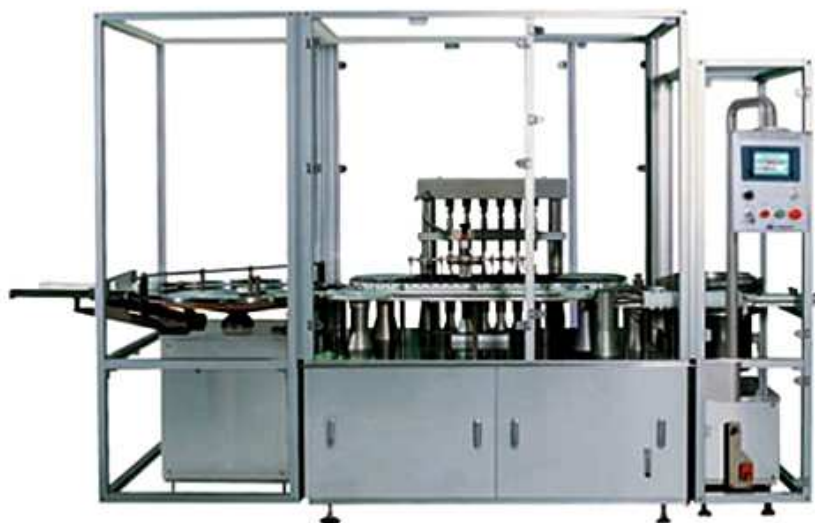

### Feature:

The precision filling system with wide volume range.  
Filling with rotary slide-valve piston pumps.

- Accurate servo control filling system as standard. (Accuracy:  $\pm 0.1\%$ )
- Rotary slide dosing valve fillers; the proven precision filling system with large volume range.
- No vials - no filling, no cap - no stopping.
- Filling components made with stainless steel #316.
- Multi-step filling system is dropped and no flow-over comes.
- Simple operation and control.
- Easy and simple operation by touch screen.
- Easy maintenance / repair.
- Simple structure and easy size change-over.
- Complete compliance with GMP regulation.

### Technical Data:

Description		MODEL
		LF-2000S
Filling Method		Servo Control
Output capacity (Ampoule/min)		180 ~ 200
Rotary slide valve		6 pcs
Compressed Air	Consumption	35(Nm <sup>3</sup> /hr)
	Pressure	3~5Kg/cm <sup>2</sup>
Electricity	Standard Voltage	220/380V, 50/60Hz
Consumption	Installed Power	3KW
Dimension	Length	3400mm
	Width	1000mm
	Hight	2100mm