




Double Head Liquid Filling Machine G1WY-2Y-1000

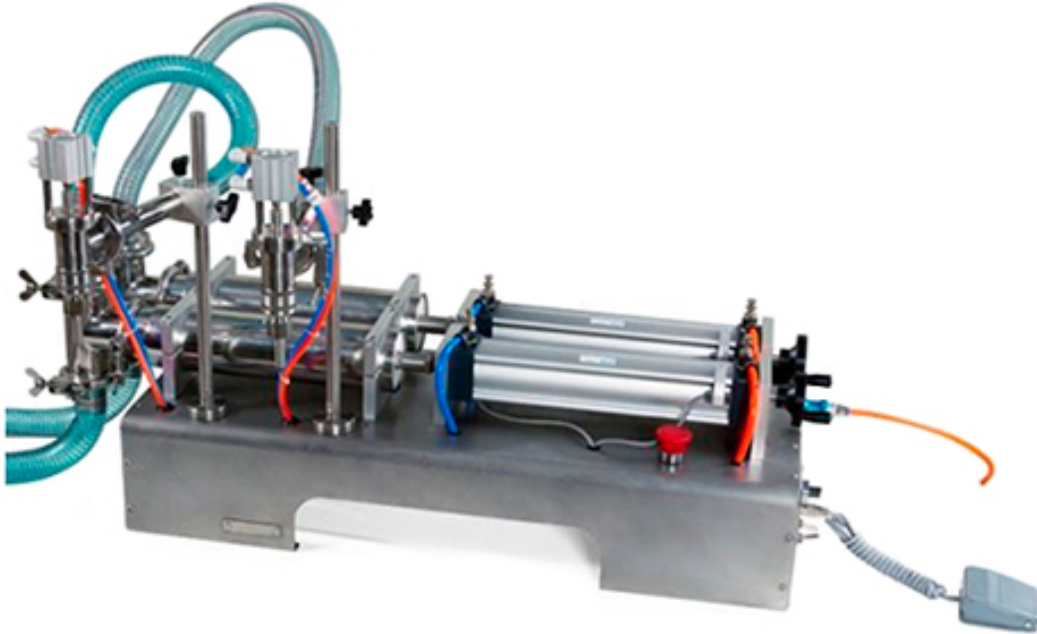

Features:

1. Reasonable design, compact shape, simple operation, partly adopt the German FESTO /Taiwan AirTac pneumatic components.
2. The contact part with the material is all made of 304 or 316 stainless steel, meet the GMP requirements and Food grade.
3. Filling volume, filling speed can be adjustable, filling accuracy is high.
4. Adopt the anti-drip, Anti-drawing and lifting filling device.

Application:

Widely used by industries in the Food & Beverage, Cosmetics, Personal Care, Agricultural, Animal Care, Pharmaceutical, and Chemical fields. And it is an ideal device for low viscosity fluid filling.

Principle

- Double heads semi-automatic liquid filling machine piston filler. Driven by a cylinder and piston made from materials with FIVE-way valves control the flow of materials, and magnetic reed switch control cylinder itinerary can be regulated filling volume.
- Rational design of the aircraft, model compact, easy to operate, are used pneumatic part of Germany and Taiwan AirTac FESTO the pneumatic components.
- Some contact materials are used 316 L stainless steel materials, in line with the GMP requirements.
- Filling volume and speed of filling can be arbitrary regulation, filling high accuracy.

Technical Parameters:

Machine model	G1WY-2Y-100	G1WY-2Y-300	G1WY-2Y-500
Filling speed	10-35n/min(take water for example)		
Filling range	10-100ml	30-300ml	50-500ml
Air pressure	0.4~0.6mpa		
Filling error	±1%		
Machine size	806(L) × 180(W) ×690(H)mm	880(L) ×230(W) ×665(H)mm	880(L) × 230(W) ×665(H)mm
Machine weight	30 Kg	35Kg	40Kg

Machine model	G1WY-2Y-1000	G1WY-2Y-3000	G1WY-2Y-5000
Filling speed	10-35n/min(take water for example)		
Filling range	100-1000ml	300-3000ml	500-5000ml
Air pressure	0.4~0.6mpa		
Filling error	±1%		
Machine size	1065 (L) ×230(W) ×665(H)mm	1250(L) ×400(W) ×300(H)mm	1390(L) ×420(W) ×380(H)6mm
Machine weight	45Kg	60 Kg	80 Kg