


## ***J-300P High Speed Bottle Type Cartoner/Cartoning Machine/Carton Erector***

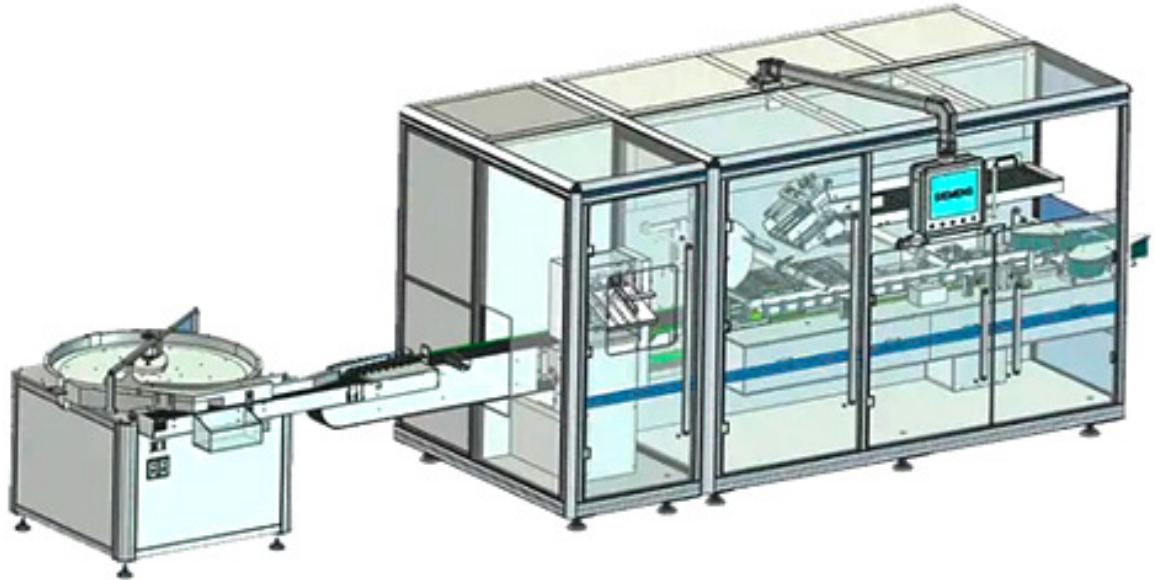

### **Production line introduction:**

After washing several bottles or after filling the rolling lid, the wire packaging of the round bottle after the labeling is completed. Conveyor belts are connected between the individual machines, which can increase the cache device, and do not need to be manually fed. The product packaging pass rate effectively controls the cross-infection of the packaging material, and ensures that its production process meets the GMP requirements, the machine has a compact structure, the mechanical layout is reasonable, and has a leading international and domestic level.

### **Performance characteristics**

1. Adopt PLC control, automatic control system such as infinite frequency conversion speed regulation or closed servo drive, encoder positioning and tracking, etc., the touch-type man-machine interface can intuitively display the operation of the equipment, and the equipment parameters and production data can be set to display the cause of the fault and operation and maintenance methods.
2. Adding a feeding system to the equipment on the same platform can realize the adjustment and use of multiple specifications within the specified range.
3. The protective cover can effectively protect the safety of the staff, and the advanced design structure is more accessible to the station for easy operation.
4. Signal indicator lights more intuitively display the operating status of the equipment in the connected production environment.
5. Print the three-row batch number synchronously on the pill box. (Optional)

6. There is an automatic detection system, and there is a positioning shutdown for unqualified products and online culling function. (Optional)
7. There is no packaging material in production, no box, no book suction, no stop function. (Optional)
8. Simple and open humanized design, making maintenance and operation convenient.
9. High efficiency, good stability and strong coherence.
10. Fully comply with GMP specifications.

### **Technical Parameters**

1. Box speed: 60~260 boxes/min
2. Adaptation range: carton length × width × height (80~200) × (30~80) × (18~50)
3. Size of the manual: length × width (80~250) × (90~180)
4. Power supply: 380V 50Hz
5. Main motor power: 1.5kW
6. Compressed air pressure: 0.6MPa
7. Compressed air gas consumption: 60~90L/min
8. Equipment weight: 3500kg

**Note:** Other models can be consulted for other models.