


## HB-14 Doypack Bag Packaging Machine



- Front reels loading
- Machine with reduced sizes and higher output
- Self-supported frame, clean and without holes
- Standard stainless execution
- Reel shafts expandable without toolings
- Parallel sealings
- Low inertia cams
- Low maintenance and high durability cutting device
- Net electrical configuration
- Remote tele assistance
- Simplex and duplex machine
- Continuous unwinding
- Formats memory programmed in recipes
- Net electrical configuration




Filling stations	1	1
Maximum volume (1)	250cc	100cc
Outside reel diameter	450mm	450mm
Core reel diameter	70-75mm	70-75mm
Maximum output	110 cycles/min.	110 cycles/min.
Power consumption	15kw	18kw
Air consumption (2)	250l/min.	250l/min.

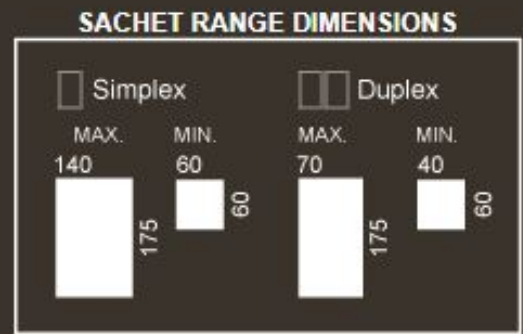

( 1 ) Depending on product, film, formats and final machine configuration.  
 ( 2 ) Approx. data are for guidance only.

Effytec reserve the right to modify the machines due to ongoing technical development without prior notice.

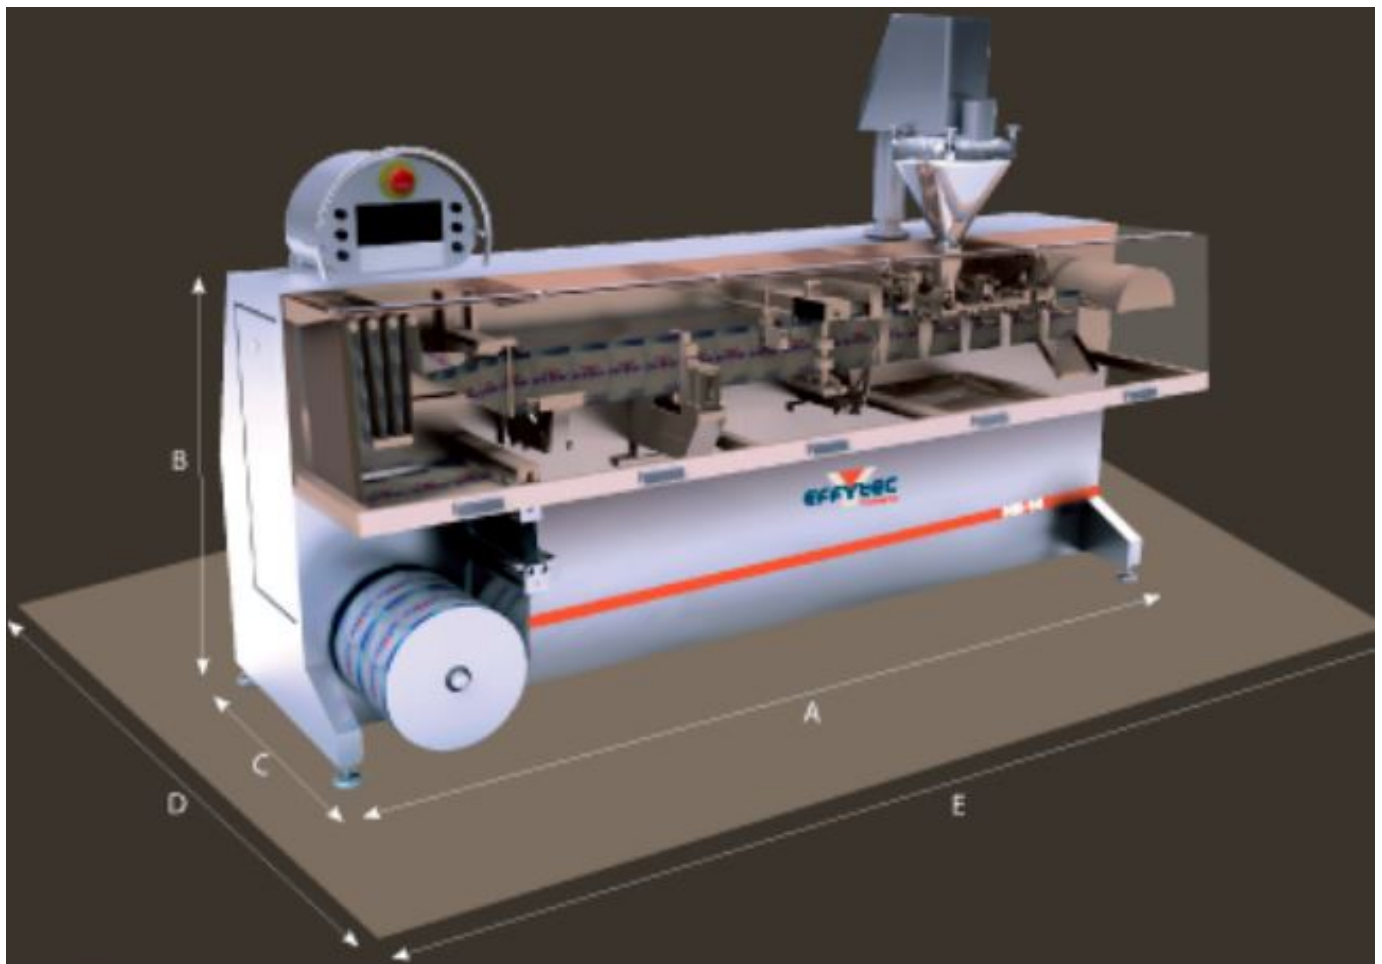

machine dimensions	A	B	C	D*	E*
HB-14	3060	1400	870	2500	3420

\*minimum recommendable location area.  
 Dimensions = mm.