

## HB-15 Doypack Bag Packaging Machine



- Front reels loading
- Machine with reduced sizes and higher output
- Self-supported frame, clean and without holes
- Standard stainless execution
- Reel shafts expandable without toolings
- Parallel sealings
- Low inertia cams
- Low maintenance and high durability cutting device
- Net electrical configuration
- Remote tele assistance
- Simplex and duplex machine
- Continuous unwinding
- Formats memory programmed in recipes

Filling stations	2	2	2	2	2
Maximum volume (1)	250cc	100cc	500cc	500cc	500cc
Outside reel diameter	450mm	450mm	450mm	450mm	450mm
Core reel diameter	70-75 mm	70-75 mm	70-75 mm	70-75 mm	70-75 mm
Maximum output	100 cycles/min.	100 cycles/min.	80 cycles/min.	65 cycles/min.	70 cycles/min.
Power consumption	15 kw	15 kw	20kw	20kw	20kw
Air consumption (2)	250l/min.	250l/min.	250l/min.	250l/min.	250l/min.



### RANGE DE DIMENSIONS DU SACHET



( 1 ) Depending on product, film, formats and final machine configuration.

( 2 ) Approx. data are for guidance only.

Effytec reserve the right to modify the machines due to ongoing technical development without prior notice.

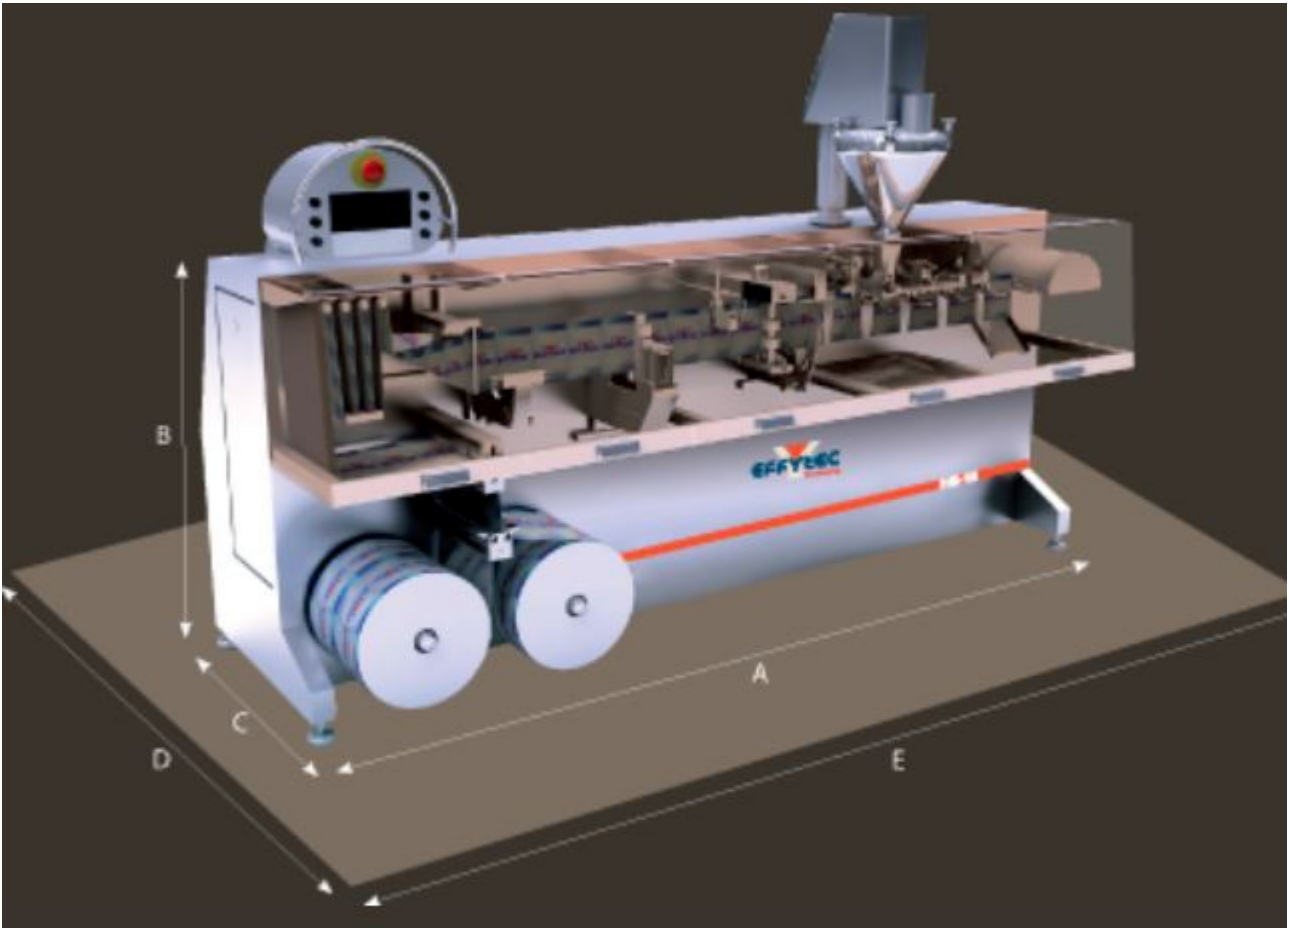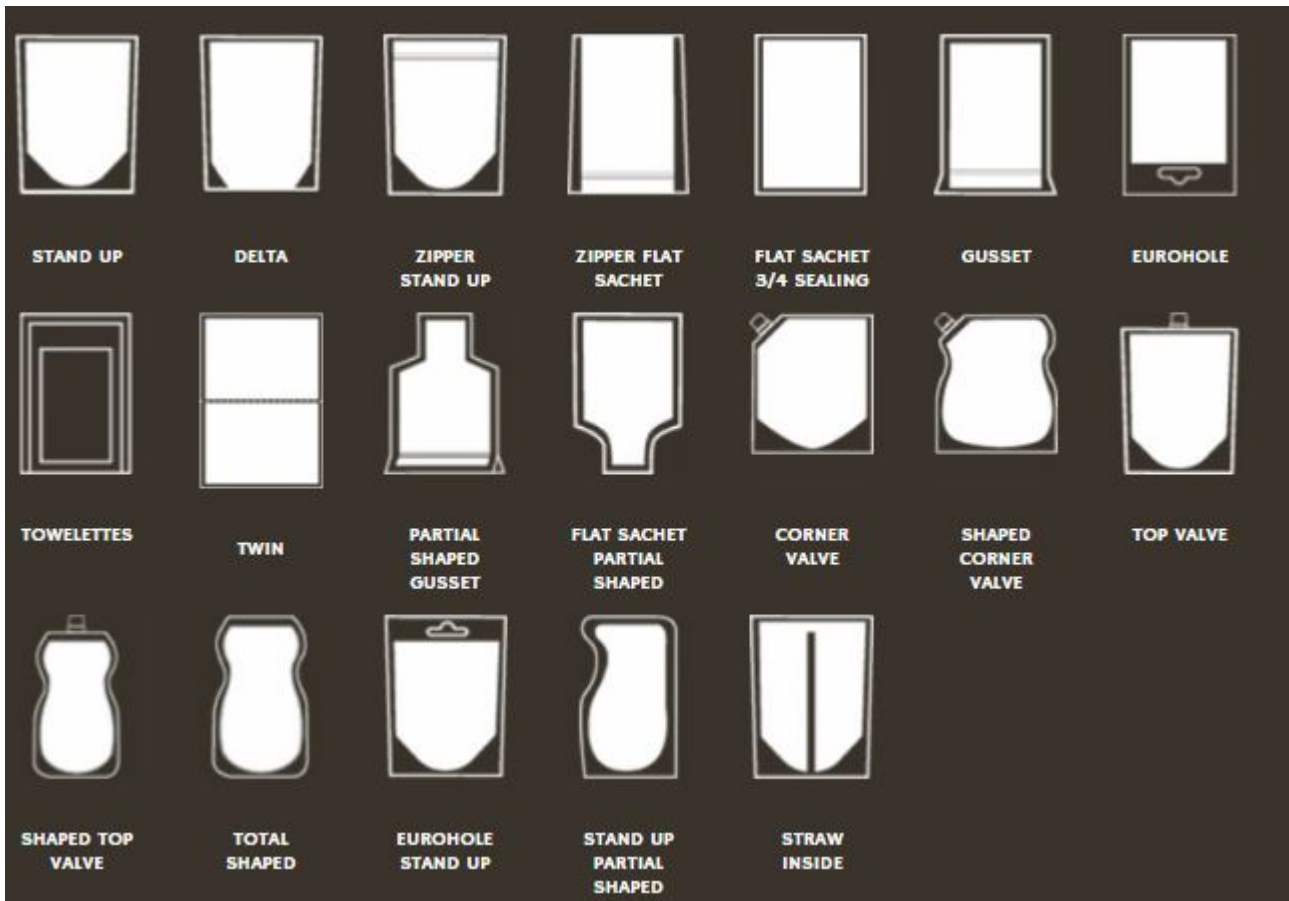

Dimensions	A	C	D*	E*
HB-15 Flat Sachet	3235	1100	2600	4735
HB-15 Stand Up	4395	1100	2600	4735
HB-15_Corner_Valve	4910	1100	2600	4735
HB-15 Zipper	4584	1100	2600	4735

\*minimum recommendable location area.  
 Dimensions : mm