


TBL-60/TBL-60D

Labeling Machine



Features :

- All mechanically operated desingwith all teansmisson mechanism inenclosed oil-bath thus wnsures smooth running quite. Low drive and teoublefree operations.
- Converyer load lower top surface and turn table made of stainless steel fordurability and ease in cleaning.
- Good for both individual operation and connection line.
- Small floor speac. Compact and easing movable with Casters.
- Most suitable for small standard of round bottle labeling in chemical.
- Pharmaceeutical, food and beverage industries. The print unit can be added to the prodct according to the user need.

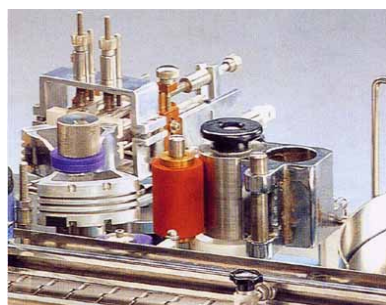

TBL-60

TBL-60D

Double

Technical Parameter	TBL-60	TBL-60D Double Head
Labeling Speed	60bottles/ Min(MAX)	60-100bottles/Min
Label width	40-110mm	40-150mm
Label long	50-300mm	25-100mm
Glue water	Polyvinyl acetate emulsion	Polyvinyl acetate emulsion
Maching size	2400mm(L)×950mm(W)×1200mm(H)	2400mm(L)×950mm(W)×1200mm(H)
Power	Ac220V or 380V, 1.5KW	Ac220V or 380V, 1.5KW
Weight	650kgs	650kg