




## AAG-6 Ampoule Filling And Sealing Machine

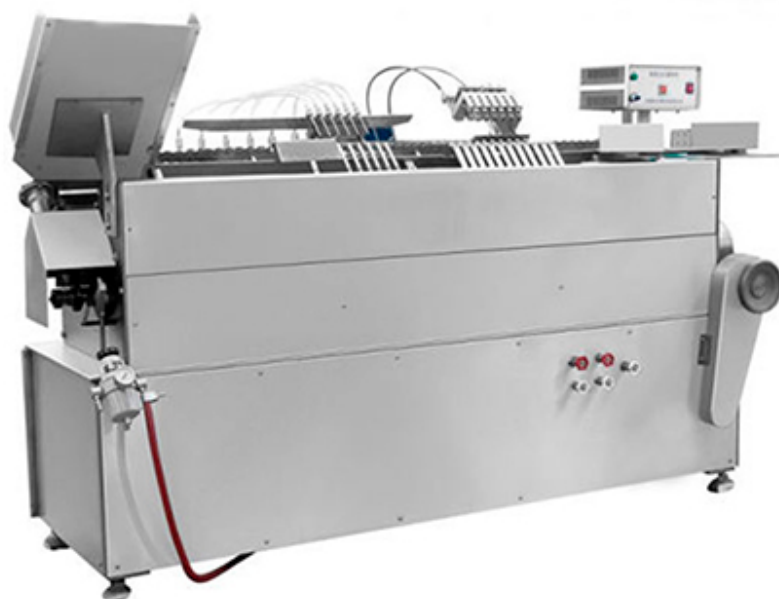

This machine is a new generation of the ampoule drawing, filling and sealing combined equipment for injections. It adopts the rectangular feeding instead of the traditional ampoule feeding methods. In such case, the feeding is steady with no easy broken ampoule. A modern clutch is mounted under the ampoule feed hopper. Therefore, the ampoule feeding can be stioood at ant time while the machine is still running. So the ampoule lost can be reduced. In the part of stopping filling where changes electromagnetic switch into mechanical switch. It is reliable and durable. Bottle revese and bottle arranging structure are used in device of bottle outlet. It reduces the broken rate of the finished products of ampoules tremendously.

### Main Machine

- This machine is a new generation of the ampoule drawing, filling and sealing combined equipment for injections.
- It adopts the rectangular feeding instead of the traditional ampoule feeding methods.
- In such case, the feeding is steady with no easy broken ampoule.

### Technical Parameter

Model	AAG6/1-2	AAG6/5-20
Specification(ml)	1-2	5-20
Capacity(pcs/h)	9 000-12 000	8 000-8 800
Power(kw)	0.55	0.55
Fuel Consunption	Gas:3-4m <sup>3</sup> /h LPG:0.08-0.1m <sup>3</sup> /h 0.7Mpa	
Combustion-Supporting Consumption	Oxygen:1m <sup>3</sup> /h 0.1Mpa	Oxygen:1m <sup>3</sup> /h 0.1Mpa
Outline Dimension(L*W*H)	1850*900*1500	1850*900*1500
Machine Weight(kg)	450	450
Power Supply	380V-50Hz	380V-50Hz