


ZD-563P Carton Bottom Folding and Conveying Machine

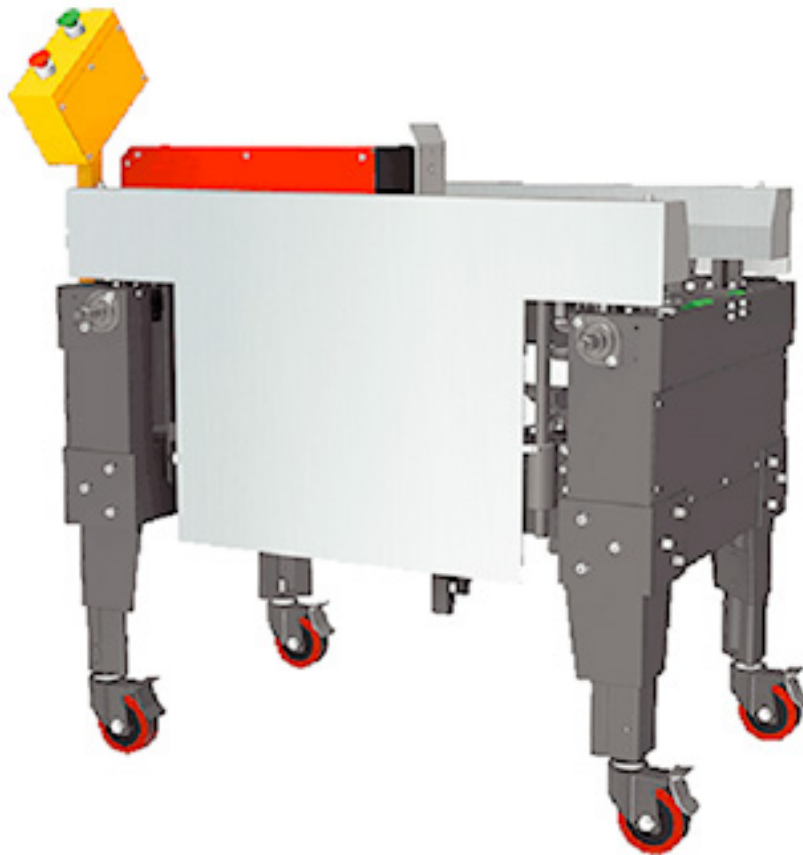

Purely pneumatic-driven, no need for electric power, foot switch to control the pushing cylinder, more efficient.

Adjustable working table height, workable in different application environments.

Pneumatic bottom folding+pushing device, automatic bottom folding after carton in position, loading can be processed before bottom sealing, also applicable for loading heavy products.

Synchronous adjustment of carton width and height, no failure in bottom sealing, easy to operate.

Lockable casters, easy to move.

Optionals:

- S/S machine frame

Technical Parameters

Model	ZD-563P
Power Source	/
Air Source (consumption)	6 KG/CM ²
Folding Speed (pcs/hour)	As per carton positioning speed
Loading Capacity (kg)	Max. 20
Packing Size (mm)	L250-500 W200-400 H100-500
Working Table Height (mm)	679 - 910
Machine Dimensions (mm)	L1117 X W862 X H1106~1306
Packing Crate Size (mm)	L1200 X W850 X H930
Machine Weight. (kg)	N.W.182 G.W.208