

HB-16 Doypack Bag Packaging Machine



- Front reels loading
- Machine with reduced sizes and higher output
- Self-supported frame, clean and without holes
- Standard stainless execution
- Reel shafts expandable without toolings
- Parallel sealings
- Low inertia cams
- Low maintenance and high durability cutting device
- Net electrical configuration
- Remote tele assistance
- Simplex and duplex machine
- Continuous unwinding
- Formats memory programmed in recipes

Filling stations	2-3	2-3	2-3	2-3	2-3	2-3
Maximum volume (1)	600cc	250cc	1500cc	1500cc	1500cc	1500cc
Outside reel diameter	500mm	500mm	500mm	500mm	500mm	-
Core reel diameter	70-75/150 mm	70-75/150 mm	70-75/150 mm	70-75/150 mm	70-75/150 mm	-
Maximum output	90 cycles/min.	90 cycles/min.	80 cycles/min.	65 cycles/min.	70 cycles/min.	65 cycles/min.
Power consumption	20 kw	25 kw	25 kw	27 kw	27 kw	15 kw
Air consumption (2)	250 l/min.	300 l/min.	350 l/min.	350 l/min.	350 l/min.	150 l/min.



SACHET RANGE DIMENSIONS



(1) Depending on product, film, formats and final machine configuration.

(2) Approx. data are for guidance only.

Effytec reserve the right to modify the machines due to ongoing technical development without prior notice.

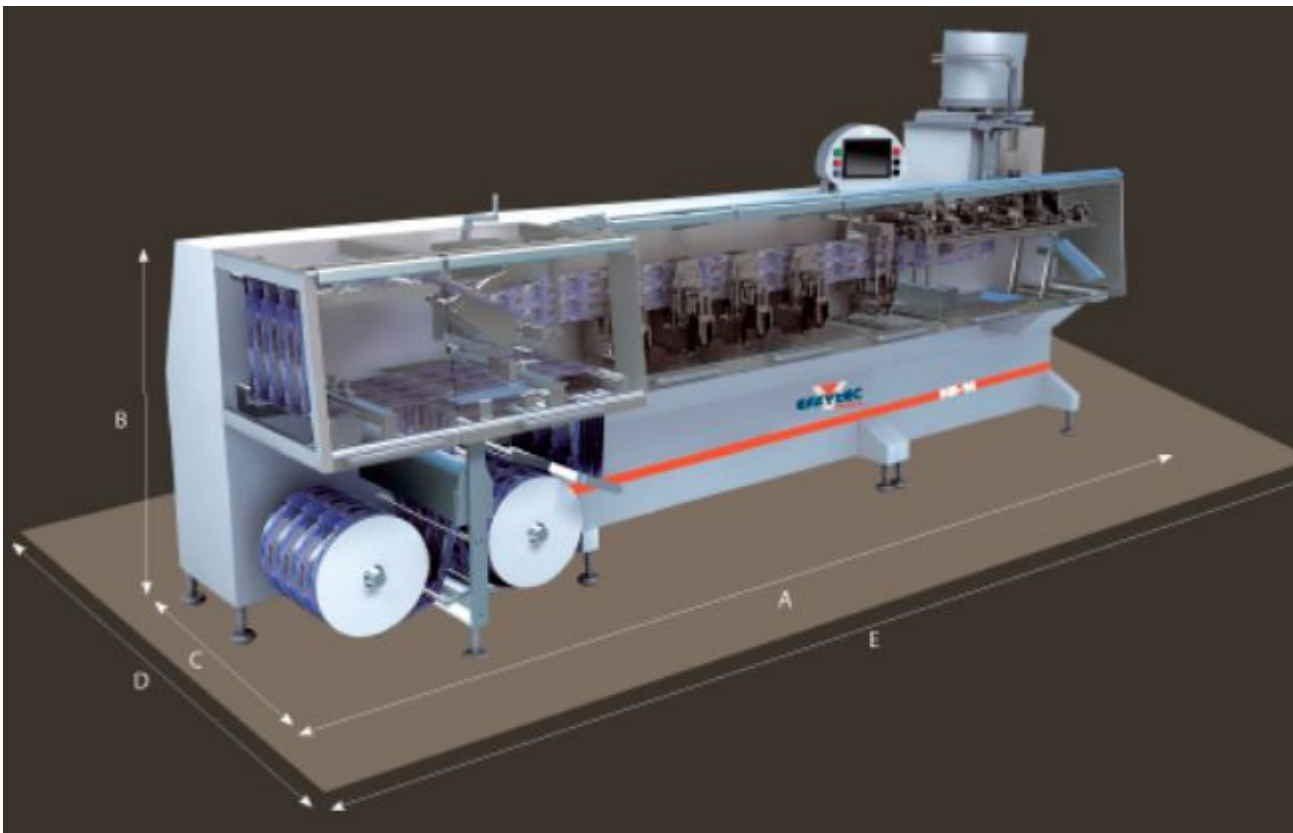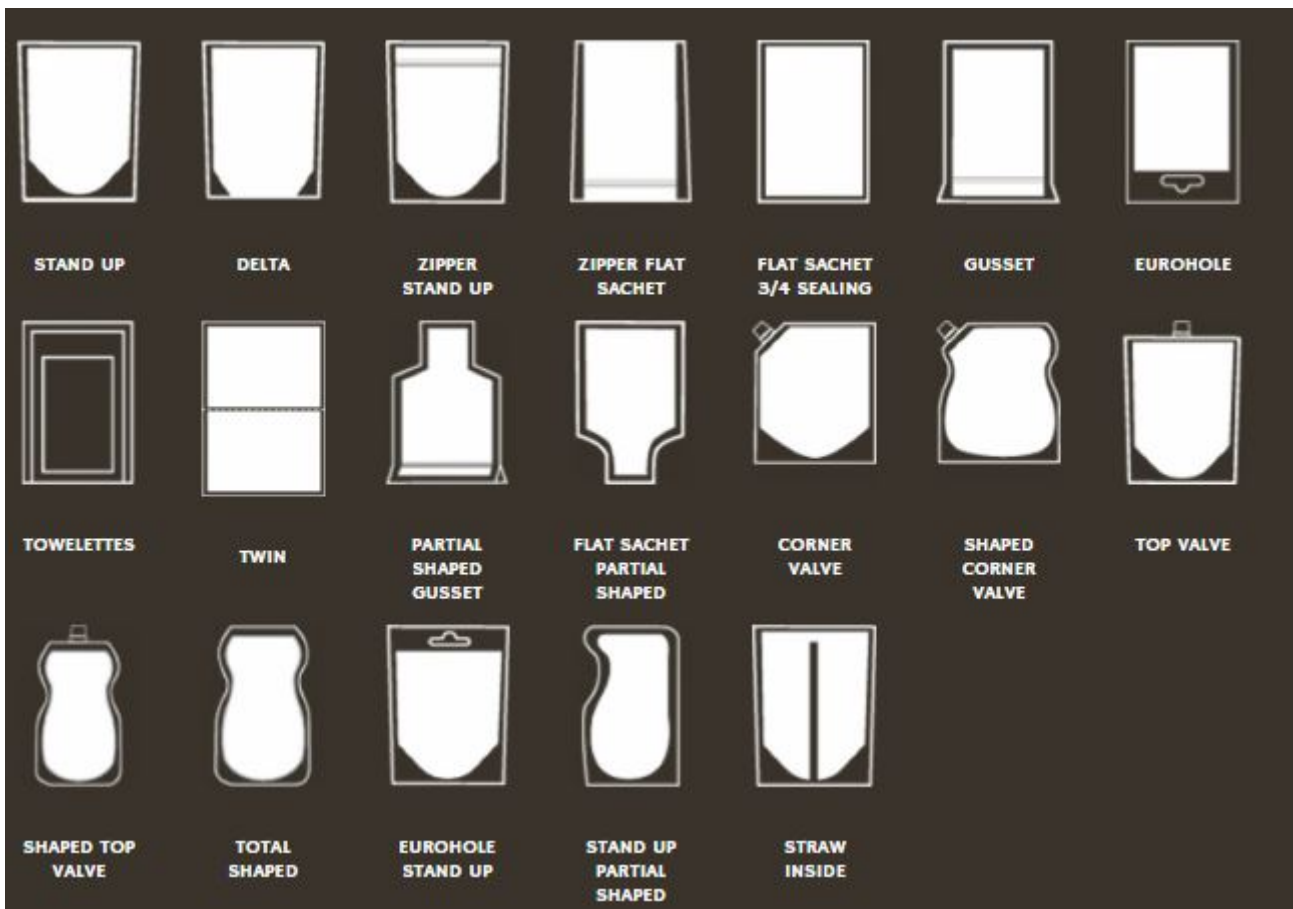

machine dimensions	A	B	C	D*	E*
HB-16 FLAT SACHET	5100	1400	1293	2793	6530
HB-16 STAND UP	5100	1400	1293	2793	6530
HB-16 CORNER VALVE	6020	1400	1293	2793	7450
HB-16 ZIPPER	5900	1400	1293	2793	7330
HB-16 PMP	2210	1400	2457	2793	3710