


TB-600/TB-600A Auto Round Labeling Machine

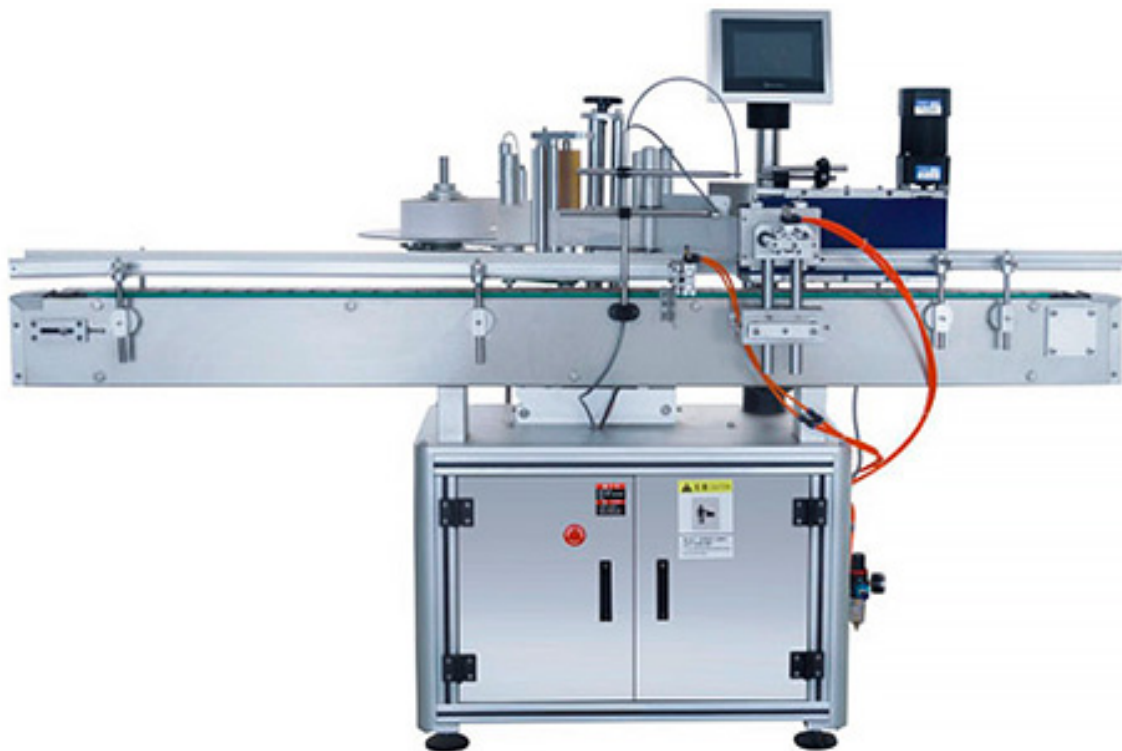

Wide application range, can meet the needs of all round bottle labeling or semi-circle labeling, bottle labeling switching between simple, convenient adjustment; label overlap is high, with the standard bypass rectifying mechanism cannot take, standard deviation, labeling parts x/y/z three direction and inclination of eight degrees of freedom is adjustable, adjust the dead a high degree of coincidence, label; self-adhesive labels, adhesive film, electronic monitoring code, bar code etc. Application Industry: widely used in food, medicine, cosmetics, daily chemical, electronics, hardware, plastics and other industries. Application example: PET round bottle labeling, plastic bottle labeling, canned food, etc.

Product features:

1. Labeling quality, using standard of spring cover belt, labeling smooth, no wrinkles, improve packaging quality;
2. Flexible application, bottle stand vertical labeling, with automatic sub bottle function, can be stand-alone production, can also be connected to the production line;
3. Intelligent control, automatic photoelectric tracking, with no matter no labeling, no standard automatic calibration and label automatic detection function, prevent leakage and label waste;
4. High stability, Matsushita PLC+ Matsushita touch screen + needle + German Matsushita Electric eye Leuze label consisting of senior electric eye control system, support equipment 7 x 24 hour operation;
5. Simple adjustment, labeling speed, conveying speed, bottle speed can be achieved stepless speed regulation, according to the need to adjust;
6. Durable, using three bar adjustment mechanism, make full use of triangular stability, solid durable machine. Made of stainless steel and advanced aluminum alloy, accord with GMP Production requirements.

Technical parameters:

Model	TB-600	TB-600A
Drive	Step motor driven	
Direction	Right/Left	
Labeling speed	120-250 PCS/MIN	
Label size	W:10-80mm	W:10-150mm
	L:15-150mm	L:15-300mm
Precision	+1mm(Subject to roundness and verticlity of the bottle)	
Label roll	Max:ø300mm	
Label core	Stander:ø75mm(3")	
Machine size	1600×800×1300mm	1800×800×1300mm
Weight	150kgs	
Voltage	AC110/220V 50/60Hz 500W	