

HB-20 Doypack Bag Packaging Machine



- Front reels loading
- Machine with reduced sizes and higher output
- Self-supported frame, clean and without holes
- Standard stainless execution
- Reel shafts expandable without toolings
- Parallel sealings
- Low inertia cams
- Low maintenance and high durability cutting device
- Net electrical configuration
- Remote tele assistance
- Simplex and duplex machine
- Continuous unwinding
- Formats memory programmed in recipes

Filling stations	2	2	2-3	2	2-3
Maximum volume (1)	1100cc	1100cc	1100cc	1100cc	1100cc
Outside reel diameter	500mm	500mm	500mm	500mm	500mm
Core reel diameter	70-75/150mm	70-75/150mm	70-75/150mm	70-75/150mm	70-75/150mm
Maximum output	80 cycles/min.	80 cycles/min.	80 cycles/min.	80 cycles/min.	80 cycles/min.
Power consumption	20kw	20kw	20kw	20kw	20kw
Air consumption (2)	250l/min.	250l/min.	250l/min.	250l/min.	250l/min.



SACHET RANGE DIMENSIONS



(1) Depending on product, film, formats and final machine configuration.

(2) Approx. data are for guidance only.

Effytec reserve the right to modify the machines due to ongoing technical development without prior notice.

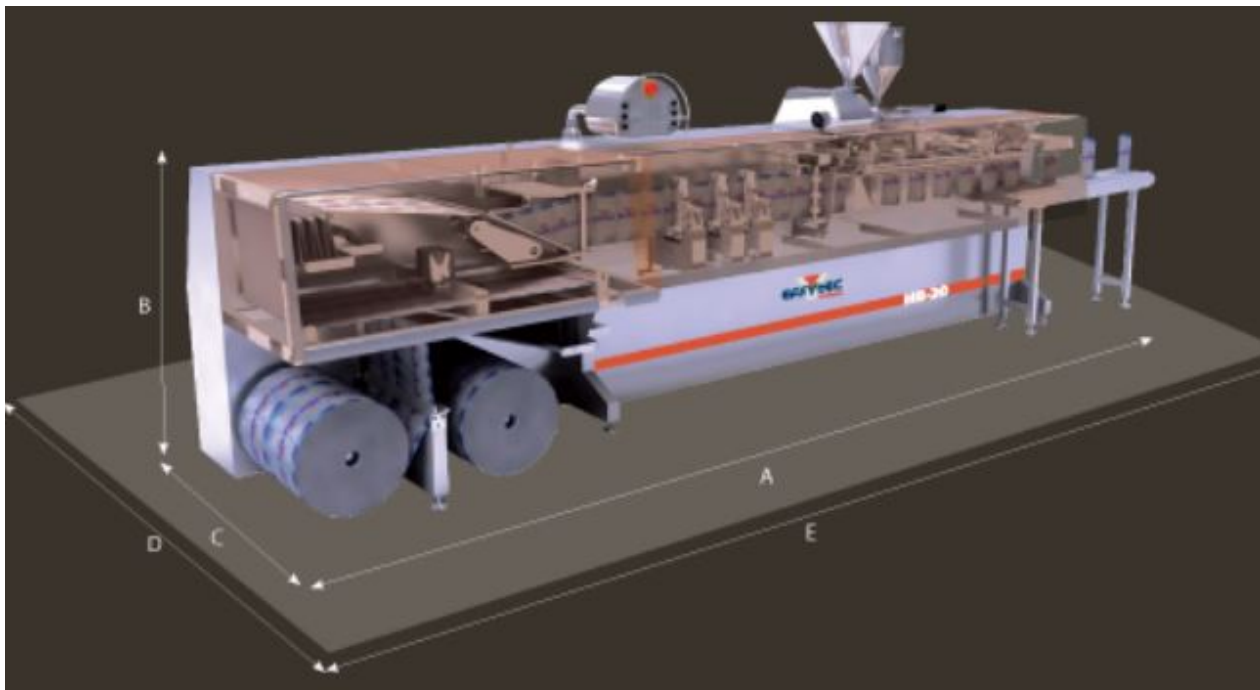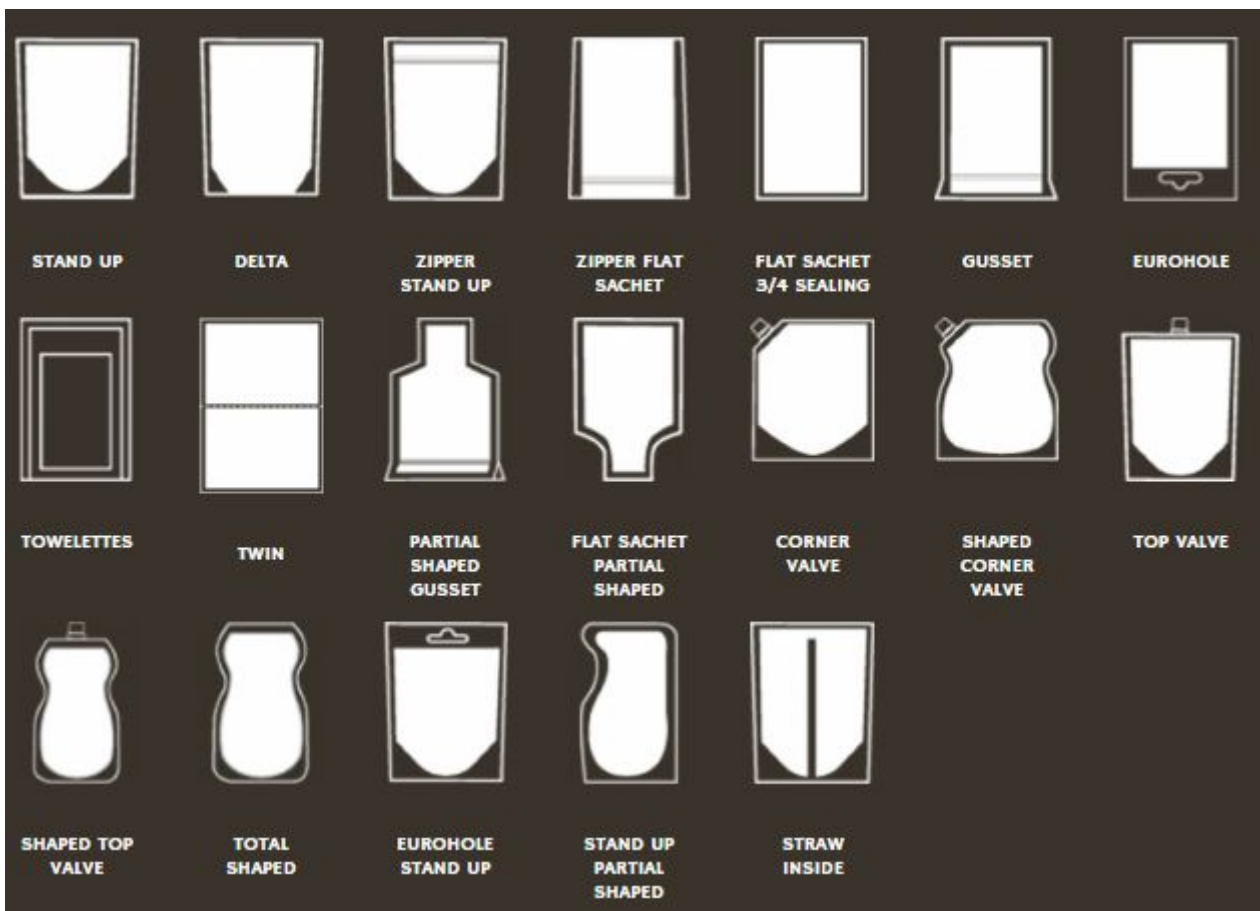

machine dimensions	A	B	C	D*	E*
HB-20 Flat Sachet	5380	1400	1293	2793	6530
HB-20 Stand Up	6147	1400	1293	2793	7647
HB-20CornerValve	7387	1400	1293	2793	8887
HB-20 Zipper	6947	1400	1293	2793	8447