

Our high production lines make it possible for us to offer a compact solution and high operating speeds.


Possibility of **adapting our machines** to the specific needs of each project.

Offering our customers an **integral solution** adapted to their requirements.

Speed, safety, robustness and easy operation are the main qualities of our high speed machinery range.


Great simplicity for changing machine configuration going from quadruple to triple, double or simple with all kinds of pouch presentations: flat pouch, stand up pouch, etc.

Makes it possible for us to offer a **wide range of possibilities** with one and only machine, giving an extra value to our customers' products.

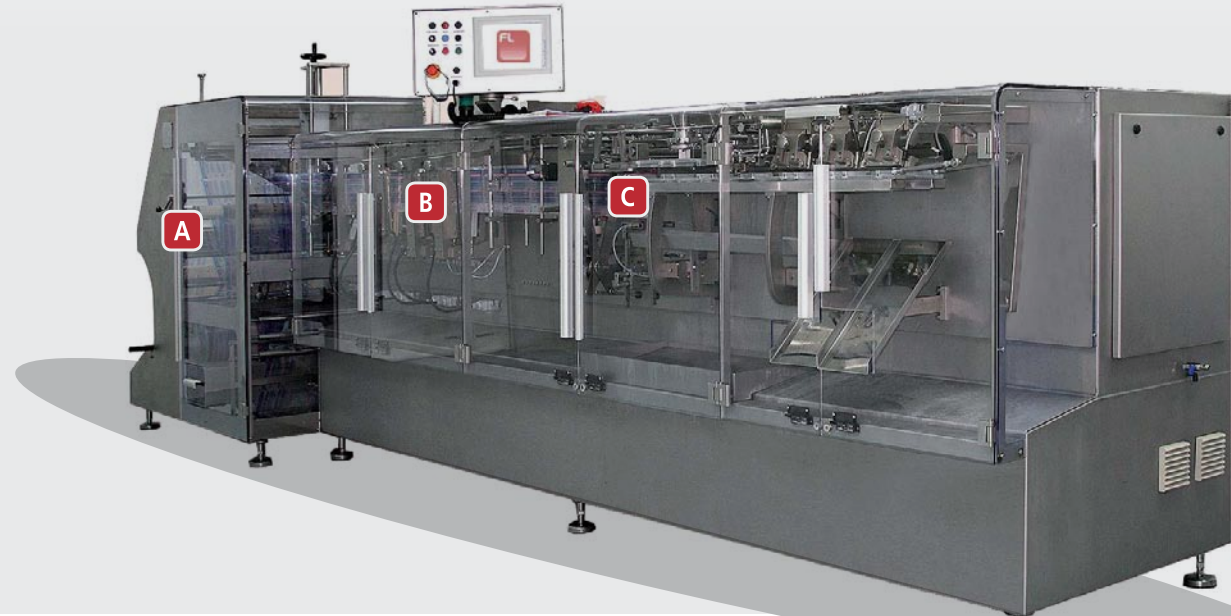

One machine,
all the possibilities

Wide range:
FLT 1 / STU 1 simplex
FLT 2 / STU 2 duplex
FLT 3 triplex
FLT 4 quattro

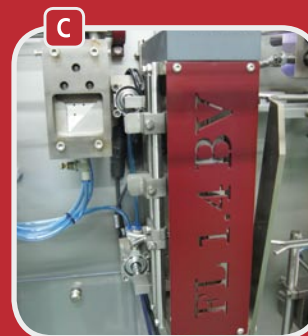

Technical details

- A** Servo drive control. High accuracy & low maintenance. Film autosplicer with integrated reel elevator.
- B** Automatic format change (*FL ChangeOver*).
- C** Control and precision. Adjustment of film height and registration mark cutting position while machine is operating (on flight).

Models		FL 3.2			FL 3.8			Speed up to (ppm)	Pouches examples
Execution	Minimum	Maximum	Vol. Max (cc)	Minimum	Maximum	Vol. Max (cc)			
<div style="background-color: #f4a460; padding: 5px; display: inline-block;"> <div style="background-color: #c8e6c9; padding: 2px; display: inline-block;">BQ</div> <div style="background-color: #f4a460; padding: 5px; display: inline-block;">HQ</div> </div>	FLT 4	40x50	80x300	150	40x50	95x300	175	360	
	STU 4	40x50	80x300	150	40x50	95x300	175	360	

(Units in millimeters [mm] except where otherwise noted)

Model

BQ: Basic Quattro
HQ: High Quattro

Version

FLT: Flat pouch
STU: Stand up pouch
1: Simplex
2: Duplex
3: Triplex
4: Quadruplex

