

# CVC1650 / 1651 Shrink Bundler & Heat Tunnel

- Lower Operating Costs

- Increase Operating Flexibility

- Unparalleled Service

- Quality that your Customers Demand



The 1650/1651 Shrink Bundler & Heat Tunnel is a user friendly, compact machine designed to shrink bundle small and medium sized products. Machine options include multiple in-feed configurations and a single or double discharge depending upon rate requirements. The 1650/1651 is an ideal machine for the Nutraceutical, Pharmaceutical, Food and Beverage Markets.

**Shrink Bundlers**

• Built to cGMP Standards • Painted Steel or Stainless Steel Construction • Economical Value • Quick & Easy Change Over

Solid Dose Bottling Lines  
Blister Packaging  
Cartoners  
Labelers

"Leading Global Equipment Supplier"

[www.cvcusa.com](http://www.cvcusa.com)



**CVC Technologies, Inc.**

# CVC1650 & 1651 Technical Specifications

## Standard Features:

- Painted Steel or Stainless Steel Construction
- Single, indexing product loader and 2-Sided Sealer
- Integrated Heat Shrink Tunnel
- Quick product size changeover
- Machine on casters for ease of movement
- Light, compact design
- Rate: Dependent upon bottle matrix

## Options:

- 1.0M Outlet Gravity Roller Conveyor, SUS 304 Stainless
- Product Change Part
- Variable Speed Drive for In-feed conveyor

## Bundler Specifications:

### Single Product Loader

- Max Width: 16" (410mm)
- Max Length: 14" (355mm)
- Max Height: 8-3/4" (222mm)

### Double Product Loader

- Max Width: 11-1/2" (292 mm)
- Max Length: 9-3/4" (247mm)
- Max Height: 8-3/4" (222mm)

## Film Roll Specifications:

### Single Product Loader

- Max Roll Width: 20-1/2" (520mm)

### Double Product Loader

- Max Roll Width: 11" (279mm)
- Max Roll Outer Diameter: 11-1/2" (292mm)


## Machine Specifications:

- Weight: 992lbs (450kgs)
- Dimensions (in): (W)86-1/2 x (L)108 x (H)63-1/2
- Dimensions (mm): (W)2200 x (L)2750 x (H)1615


## Power and Air Requirements:

- Power Source: 220V, 50/60Hz, Three Phase
- Power Consumption: 50-75 AMP including Bundler and Heat Tunnel
- Air Pressure: Minimum 87psi
- Air Volume: 280 L (\*Plant air must be dry and clean)

## Machine Layouts:

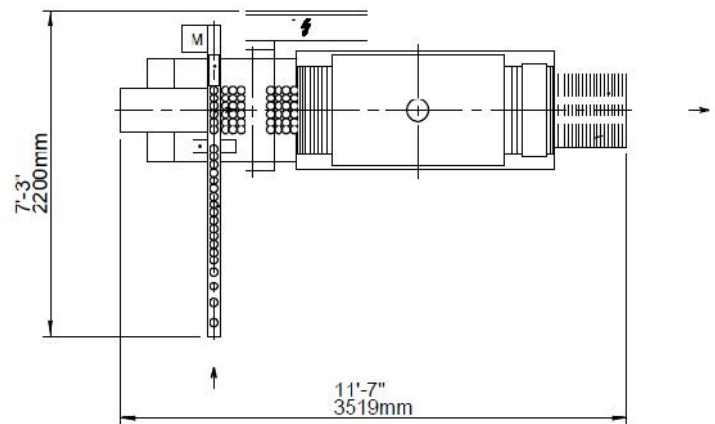

Top View

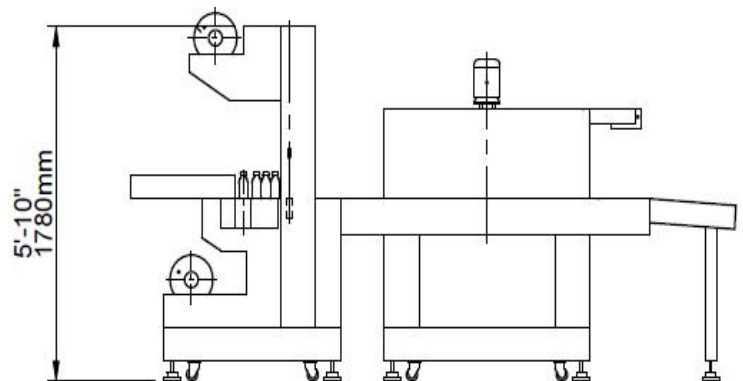

Front View

*Dimensions shown are for a standard machine. This machine can run independently or can be integrated into an automated packaging line. All CVC equipment is covered by a one year parts warranty. Full Warranty details are included in our equipment proposals or can be found on our website.*



**Quality • Value • Service**

Authorized CVC Dealer

Copyright © CVC Technologies, Inc. • Jan. 2012 Edition