


HB-26 Doypack Bag Packaging Machine



- Front reels loading
- Machine with reduced sizes and higher output
- Self-supported frame, clean and without holes
- Standard stainless execution
- Reel shafts expandable without toolings
- Parallel sealings
- Low inertia cams
- Low maintenance and high durability cutting device
- Net electrical configuration
- Remote tele assistance
- Simplex, duplex and triplex machine
- Continuous unwinding
- Formats memory programmed in recipes

Filling stations	2	2-3	2-3	2-3	2-3
Maximum volume (1)	1200cc	450cc	1500cc	1500cc	1500cc
Outside reel diameter	500mm	500mm	500mm	500mm	500mm
Core reel diameter	70-75/150mm	70-75/150mm	70-75/150mm	70-75/150mm	70-75/150mm
Maximum output	75 cycles/min.	75 cycles/min.	75 cycles/min.	60 cycles/min.	70 cycles/min.
Power consumption	20 kw	25 kw	25 kw	25 kw	25 kw
Air consumption (2)	250 l/min.	300 l/min.	350 l/min.	350 l/min.	350 l/min.



SACHET RANGE DIMENSIONS

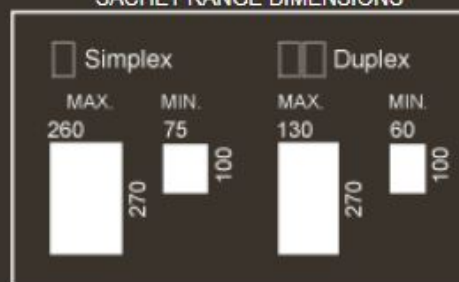

(1) Depending on product, film, formats and final machine configuration.

(2) Approx. data are for guidance only.

Effytec reserve the right to modify the machines due to ongoing technical development without prior notice.

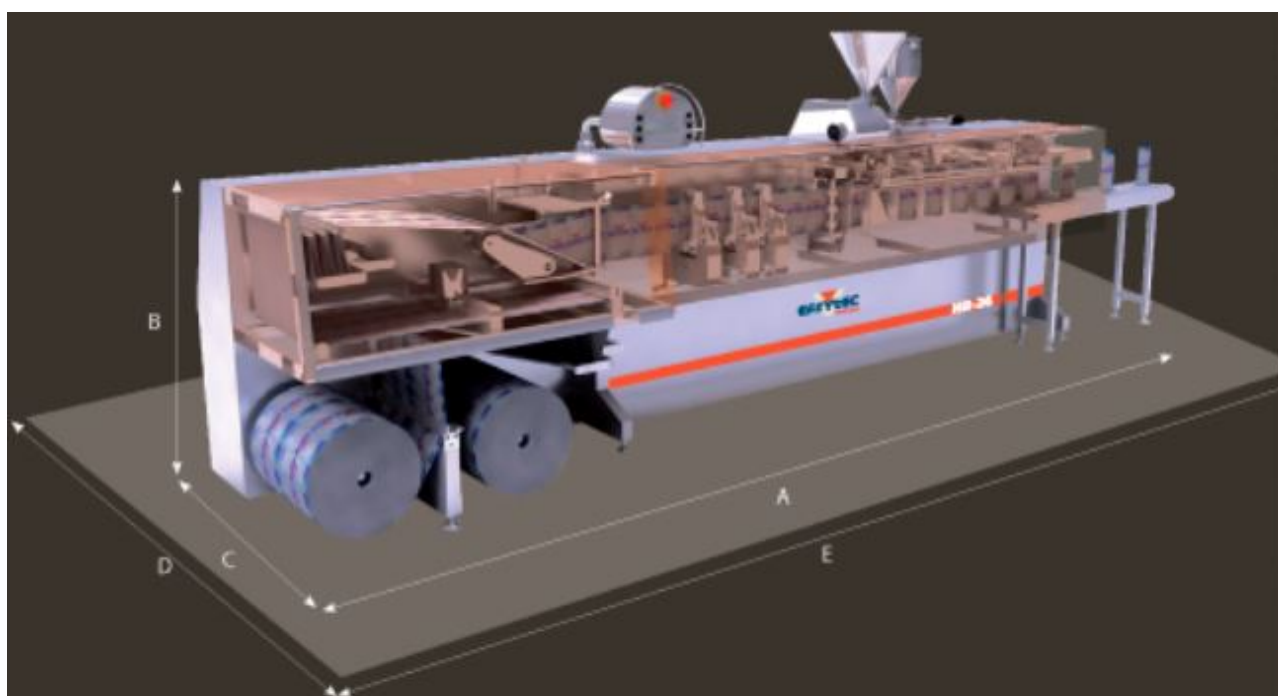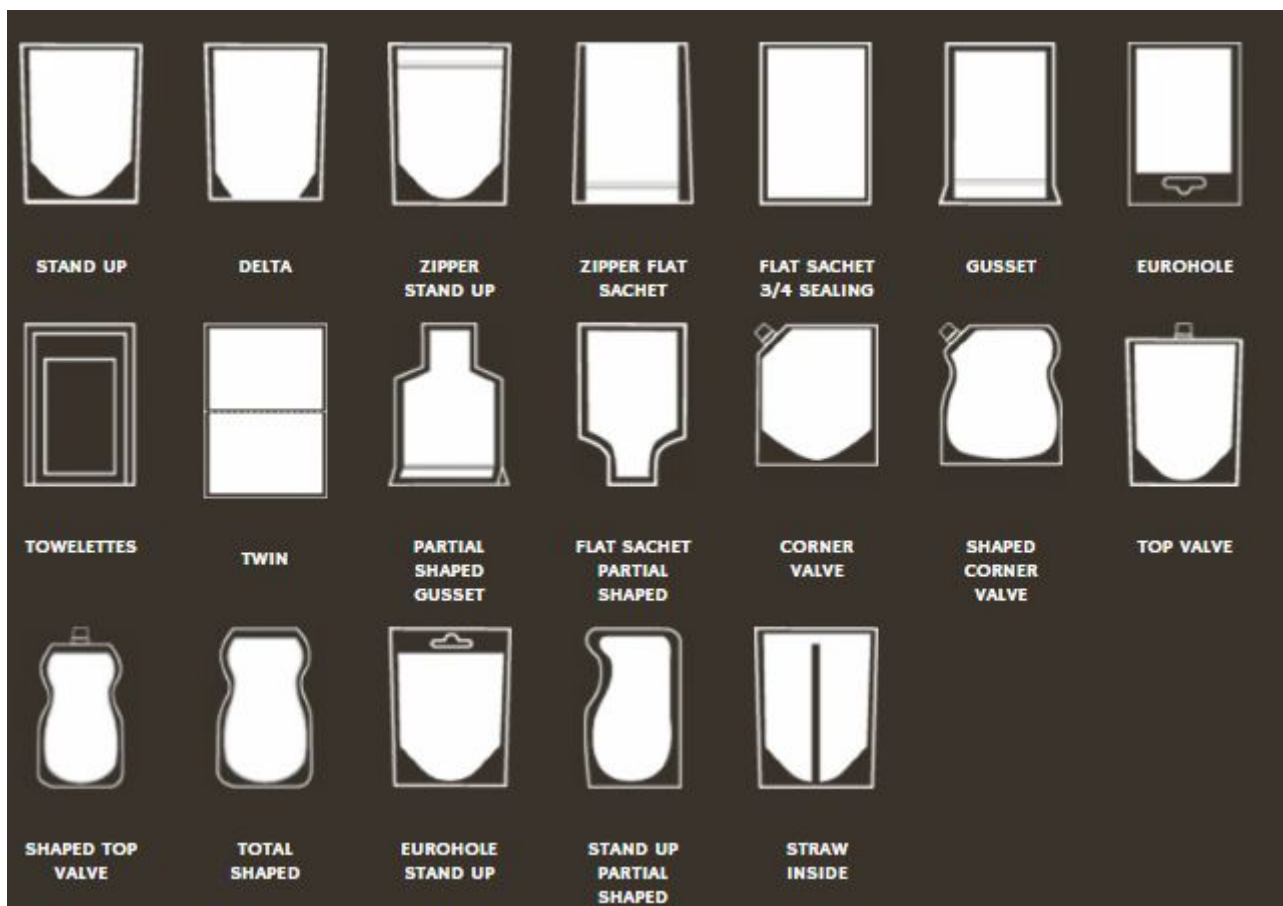

machine dimensions	A	B	C	D*	E*
HB-26 Flat Sachet	7150	1400	1293	2793	8650
HB-26 Stand Up	7150	1400	1293	2793	8650
HB-26 Corner Valve	8390	1400	1293	2793	9890
HB-26 Zipper	7950	1400	1293	2793	9450