


HF-2000M Steam Wrapping Tunnel with Glass Door

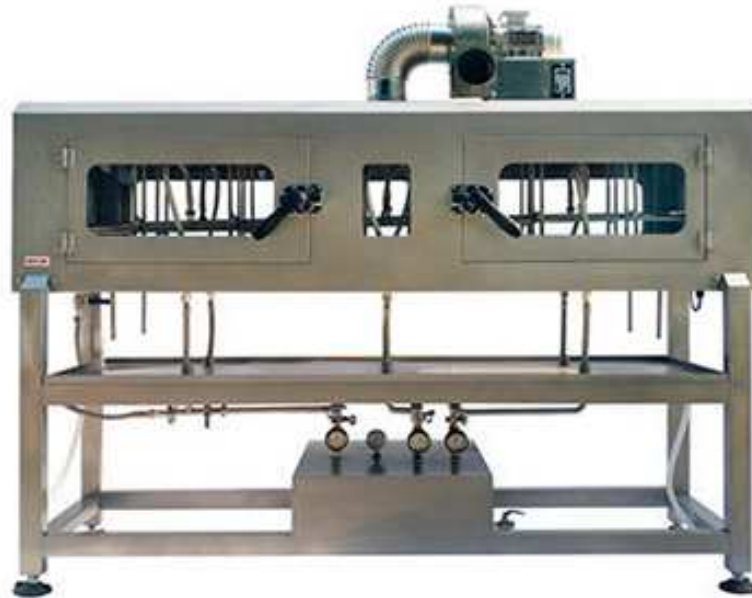

Steam wrapping tunnel is used for shrinking sleeve labels to label kinds of bottles: different and irregular round bottles, square bottles, flat bottles and women-shaped bottles. By shrinking PVC or PET sleeve labels to seal bottles caps /necks, cover bottles body even shrink wrap bottle bottom.

To get smooth shrink effect, we usually adjust the heights and positions of the 3 sections of steam spray tubes insides of tunnel. Bottles run on the conveyor, the shrink usually goes from down to top of bottles.

Parameters:

| Item Models | HF-1200M | HF-1500M | HF-2000M | HF-2300M |
|-------------------------|---------------------------------------|----------------|----------------|----------------|
| Length of tunnel | 1.2meters | 1.5meters | 2.0meters | 2.3meters |
| Blower powder | Ø12, 0.25KW | Ø12, 0.25KW | Ø12, 0.25KW | Ø12, 0.25KW |
| Powder supply of blower | 220V 3P 60Hz or 220V 1P 50Hz | | | |
| Entrance /exit height | Max 350mm | | | |
| Entrance /exit width | 130~210mm (fixed size once confirmed) | | | |
| Running pressure | Max 0.6Mpa | Max 0.6Mpa | Max 0.6Mpa | Max 0.6Mpa |
| Weight | 180kg | 200Kg | 220kg | 230kg |
| Steam consumption | 18kg/h | 21kg/h | 24kg/h | 24kg/h |
| Conveyor speed | 0~35m/minute | 0~35m/minute | 0~35m/minute | 0~35m/minute |
| Outline size (m) | L1.2*W0.4*H1.5 | L1.5*W0.4*H1.5 | L2.0*W0.4*H1.5 | L2.3*W0.4*H1.5 |