


## *Automatic Spray Capping and Plastering Machine M-KAP-C05*

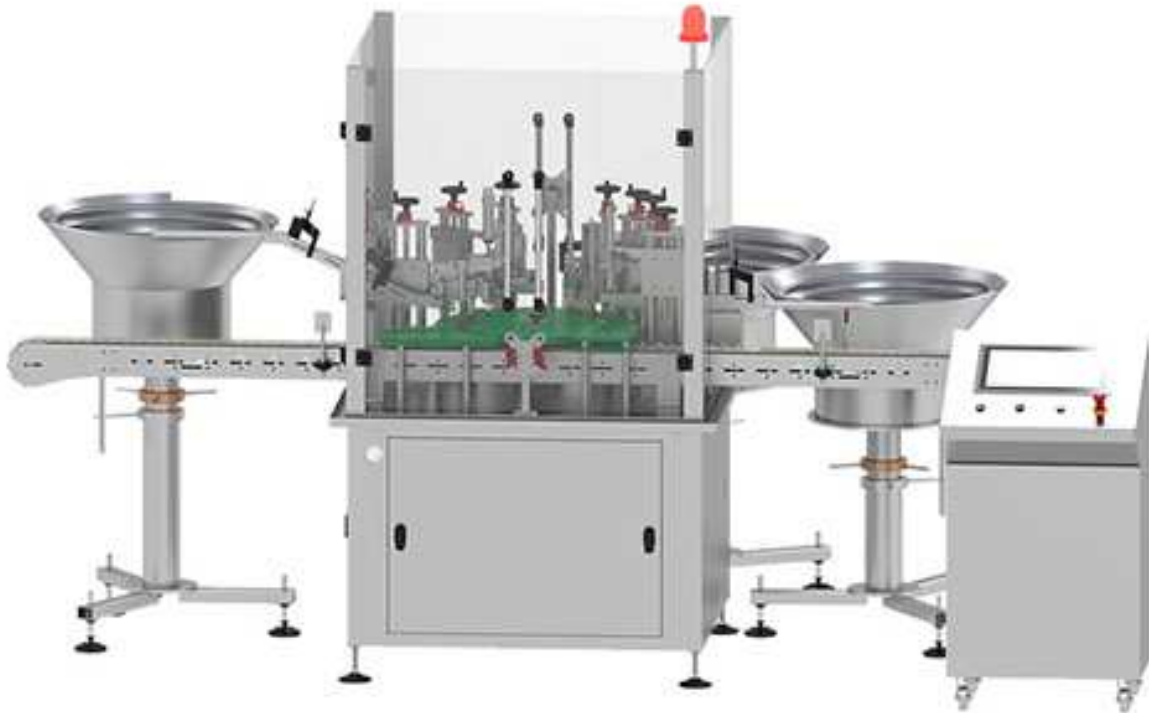

### **General Description**

- Advanced easy-to-use Beckhoff PLC control system
- Touch screen 7" or 15" operator panel
- The machine is specially designed according to the cap and bottle of the customer.
- The capping machine varies according to the type of cap and bottle used.
- Different molds are available according to standard cap sizes and special cap sizes
- It can be used safely in the pharmaceutical, food, cosmetic and chemical industries.
- Provides easy integration with other machines
- Transparent plexi protective door security.
- The machine is designed to be easily cleaned.
- Adjustments of the machine are easily made with flywheels and numerators.
- Closed enclosure in CE norms to ensure occupational safety and environmental cleanliness.
- Sensors (photocell) used on the machine SICK, KEYENCE
- Pneumatic materials used on the machine SMC, FESTO
- All reducers used on the machine are Bonfiglioli
- All 304 and 316 stainless materials used on the machine are licensed.
- Easy change in a short time
- Ease of maintenance and service

## Technical Specifications

- System: Star
- Working Principle: Stop and Go
- Construction: Chassis is stainless steel, all visible surfaces are AISI 304 quality stainless and anodized aluminum.
- Control Unit: Beckhoff
- Packaging: Plastic, glass, metal
- Cap Type: Aluminum ROPP (Roll-on pilfer-proof), Press on snap cap
- Closing System: Motorized rolling on or Crimp-on, hammering with piston
- Electricity Requirement: 380V, 50Hz, 3 phases
- Air Requirement: 6-8 Bar
- Energy Consumption: 2.5 kW
- Air Consumption: 600 lt/min
- Weight: ~650 kg
- Capacity: 50 BPM