
TT-9CW **TT-9CW2**

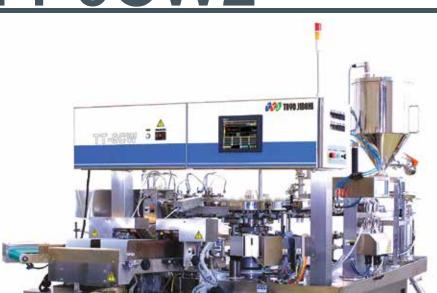

FEATURES & BENEFITS

- Double pouch action machine for a variety of products.
- Designed to adhere to the most stringent safety and sanitation requirements.
- Operator friendly design for easy maintenance, operation and cleaning.

Pouch Opening, Solid Filling

A double action motion for stable pouch opening. Various filling machines can be interlocked.



Liquid Filling

Easy to disassemble for cleaning. Various types of nozzles to comply to your application.





High speed pouch filler/sealer



Pro Mach Flexible Packaging Group

650 Dekora Woods Blvd. Saukville, WI 53080

(888) 628-7491 (262) 268-8300

Info@ProMachFlexible.com www.ProMachFlexible.com



powered by Pro Mach 🥸




TT-9CW TT-9CW2



MACHINE SPECIFICATIONS

	TT-9CW	TT-9CW2
Capacity (Depending on product)	30-90 pouches/min.	30-60 pouches/min.
Pouch Size	• (W) 80-150 mm • (L) 120 - 230 mm	• (W) 120-180 mm • (L) 150 - 300 mm
Pouch Material	Various laminated pouches	
Pouch Style	Flat Stand-up	
Filling Product	Various pumps available depending on products	
Filling Range	Standard 50-350 cc	
Deaerating	Press type	
Sealing Method	2 step heat seal, 1 step cooling press	
Electric Power	7.5 kVA	
Air Consumption	0.5 MPa (72 psi), 600 NI/min.	0.5 MPa (72 psi), 800 NI/min.
Machine Dimensions	2,197 (W) x 3,094 (L) x 1,873 (H) mm	2,715 (W) x 3,301 (L) x 1,923 (H) mm
Machine Weight	3,000 kg	3,500 kg

MACHINE DIMENSIONS

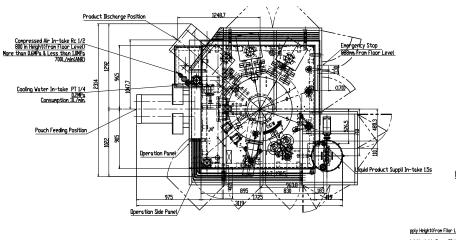

High speed pouch filler/sealer

Accessories

- Product discharge conveyor
- · Vacuum pump
- Funnel
- · Product counter
- · Heater disconnection alarm
- · Pouch opening detection device

Options

- Date printer
- Stand-up pouch bottom opening device
- · Various filling devices
- Special liquid tanks
- Agitator
- · Level switch
- Compressor
- Tapping device
- Special pouch magazine
- Fill waiting operation

APPLICATIONS

- Retorted pouch foods
- Pre-cooked foods
- Frozen foods
- Sauces
- Juices
- Processed sea food
- · Liquid detergent
- Many more!

