


# AXION INCLINED F26I



## AXION F26I Eğik Makina

45° sabit açılı çeşitli kırılğan ve nazik işlem gerektiren ürünlerin ambalajlanması için kullanılan paketeleme makinasıdır, böylece büyük bir esneklik sağlar. Çok Kefeli terazi, Lineer tartı, Volümetrik dolum ünitesi, eğik kayışlar gibi çeşitli besleme cihazlarıyla entegre edilebilir.

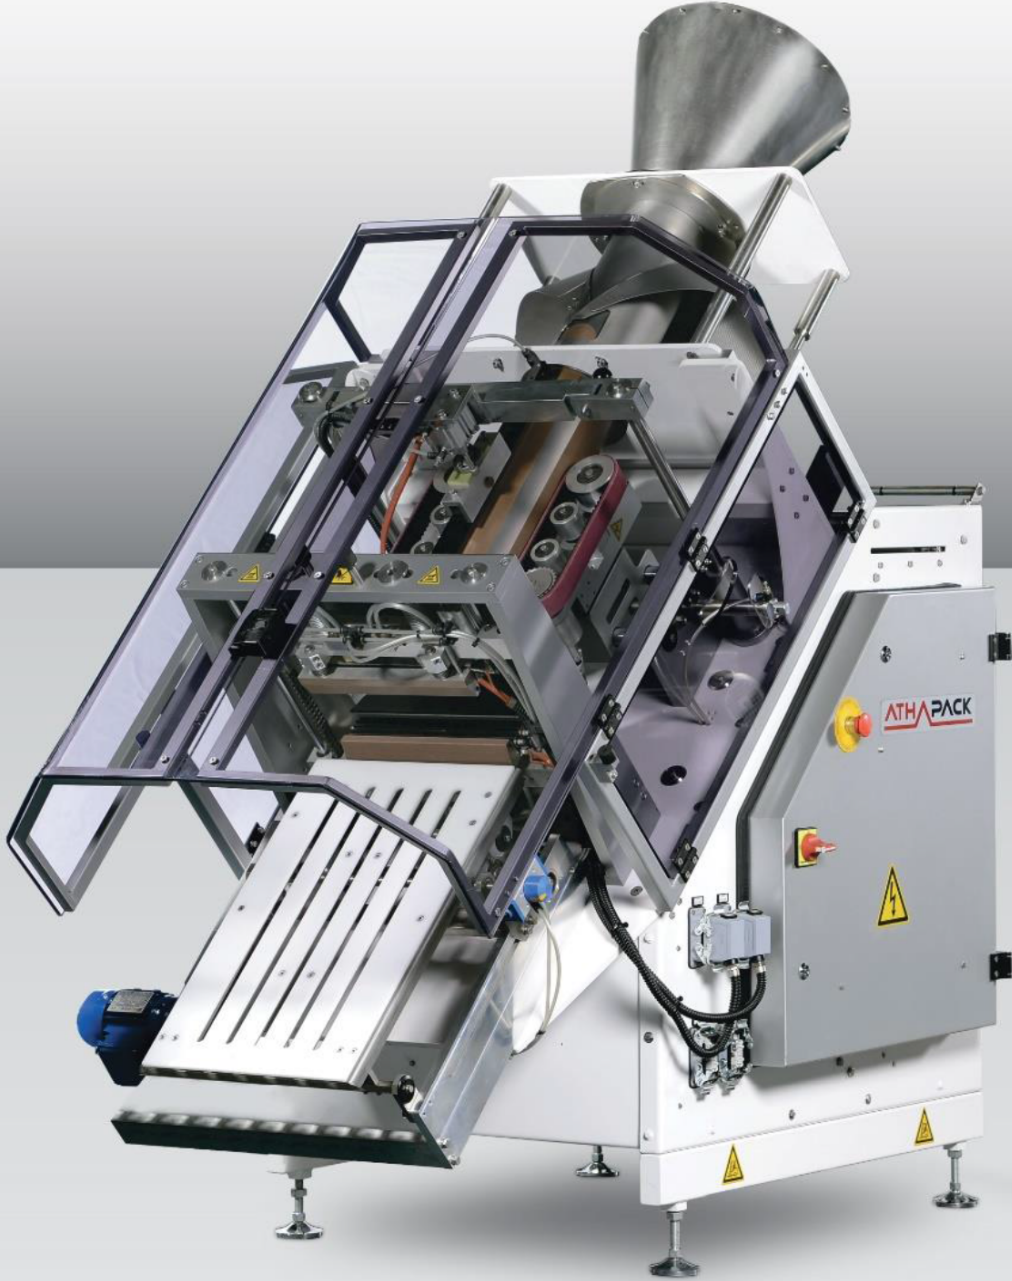

## AXION F26I inclined machine

45° fixed angle Inclined packaging machine suitable for packaging a variety of fragile products and products that require gentle handling, thus providing great flexibility. It can be integrated with various types of feeding devices such as Volumetric weigher, Linear weigher, Multi-head weigher, inclined belts, etc.



## Упаковочная машина F26I

Упаковочная машина F26I с фиксированным углом 45°, подходит для упаковки хрупких продуктов и для продуктов требующих бережного обращения, тем самым обеспечивая большую гибкость. Машина может быть интегрирована с различными типами дозирующих устройств, такие как, Объемный дозатор, Линейный весовой дозатор, Мультиголовочный дозатор, наклонные конвейеры и т.п.

AR

## ماكينة تعبئة F26I المائلة

هي مكائن تعبئة وتغليف مائلة بدرجة ثابتة 45° ذات حركة متقطعة عالية الكفاءة ملائمة للمنتجات الهشة القابلة للانكسار بسهولة والمنتجات التي تتطلب التعامل بلطف. يمكن أن تكون متكاملة مع أنواع مختلفة من أجهزة التغذية مثل وحدة التعبئة الحجمية، الميزان الخطي، الميزان المتعدد الرؤوس (الكفات)، والأحزمة المغذية المائلة، والخ.

## *F26I Inclined Packaging Machine*



**45° fixed angle Inclined packaging machine suitable for packaging a variety of fragile products and products that require gentle handling, thus providing great flexibility. It can be integrated with various types of feeding devices such as Volumetric weigher, Linear weigher, Multi-head weigher, inclined belts, etc.**

### **General Features**

- 45° Fixed Angle
- Intermittent motion System
- All surfaces in contact with the product are AISI 304 stainless steel
- Air conditioning on the control cabinet (option)
- Static Eliminator (option)
- Printer application (option)
- Vacuum application on drive belts (option)
- Automatic Film changeover (option)
- The parameters and settings are made easily from the 10" industrial PC
- All functions of the machine are controlled by the Motion Controller
- All main movements in the machine are carried out by independent Servo motors
- Works with and without photocell
- The sealings are provided by P.I.D Heat Control System
- With film adding Unit, bobbin replacement is easy
- With the Auto-Film Centering System, the film is always centred
- Auto-Film Merkezleme Sistemi ile film sürekli eksende
- With the Auto-Film unwinding System, the reel is continuously opened at the same tension.
- When the film is finished, the machine is automatically stopped
- Any error occurs, the machine is automatically stopped and the errors will be displayed on the screen
- Packaging materials: Polypropylene, polyethylene, all laminated films, barrier film, water-soluble film
- Types of bags: pillow bag, gusseted bag, flat bottom bag, edge scratch bag and string bags
- Suitable for different types of filling systems: Volumetric & Auger filler, Multihead & Linear weighers and various liquid fillers
- CE standard

## AXION F26I Technical Data

<b>Features</b>	F26I
<b>Mechanical Speed</b>	Max. 80 cycle/min
<b>Bag Length</b>	Max. 300 mm
<b>Bag Width</b>	Max. 260 mm
<b>Reel Width</b>	Max. 600 mm
<b>Reel Diameter</b>	Max. 400 mm
<b>Power Consumption</b>	5 kW
<b>Voltage</b>	380 V 3 Phase 50 Hz
<b>Air Consumption</b>	150 l/min
<b>Air Pressure</b>	Min 6 Bar
<b>Weight</b>	800 kg
<b>Dimensions (Width x Length x Height)</b>	1020 x 1925 x 2000 (mm)