

GP-32 Doypack Bag Packaging Machine



- Front reels loading
- Machine with reduced sizes and higher output
- Self-supported frame, clean and without holes
- Standard stainless execution
- Reel shafts expandable without toolings
- Parallel sealings
- Low inertia cams
- Low maintenance and high durability cutting device
- Net electrical configuration
- Remote tele assistance
- Simplex, duplex and triplex machine
- Continuous unwinding
- Formats memory programmed in recipes

Filling stations	3	3	2-3	2-3	2-3
Maximum volume (1)	1100cc	1000cc	2000cc	2000cc	1500cc
Outside reel diameter	800mm	800mm	800mm	800mm	800mm
Core reel diameter	70-75 mm / 150-155 mm				
Maximum output	70 cycles/min.	70 cycles/min.	70 cycles/min.	60 cycles/min.	65 cycles/min.
Power consumption	20 kw	25 kw	25 kw	27 kw	27 kw
Air consumption (2)	250 l/min.	300 l/min.	350 l/min.	350 l/min.	350 l/min.



SACHET RANGE DIMENSIONS



(1) Depending on product, film, formats and final machine configuration.

(2) Approx. data are for guidance only.

Effytec reserve the right to modify the machines due to ongoing technical development without prior notice.

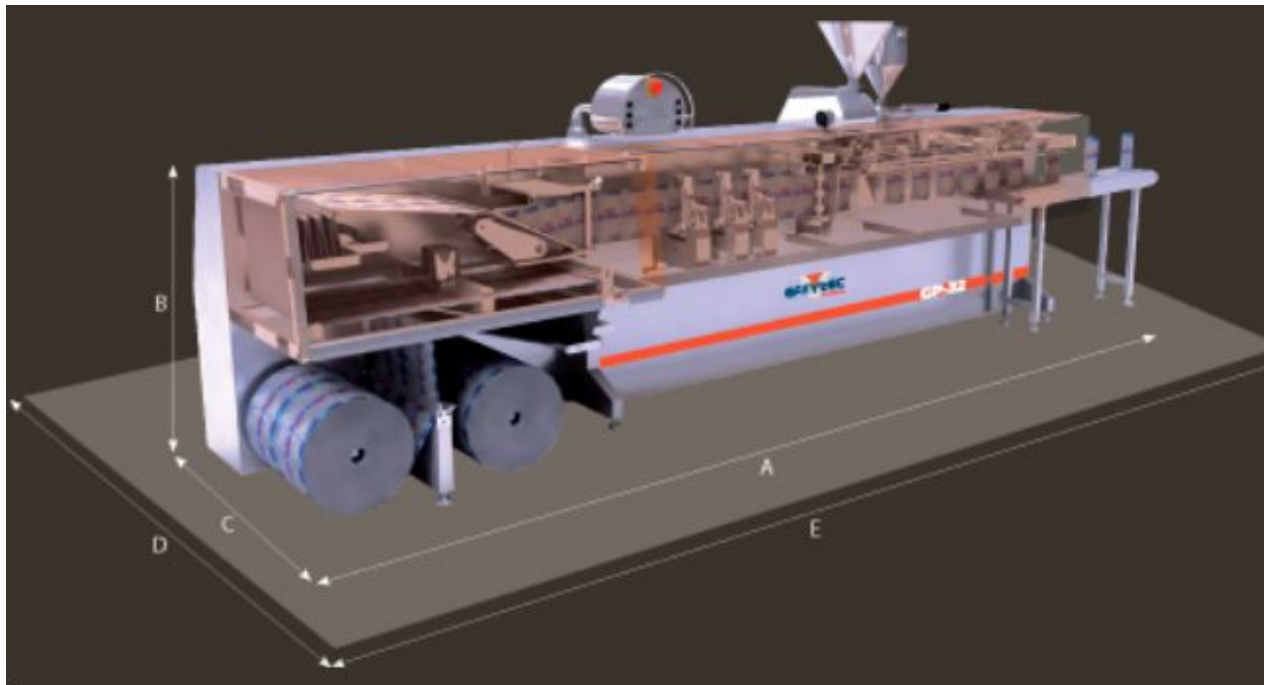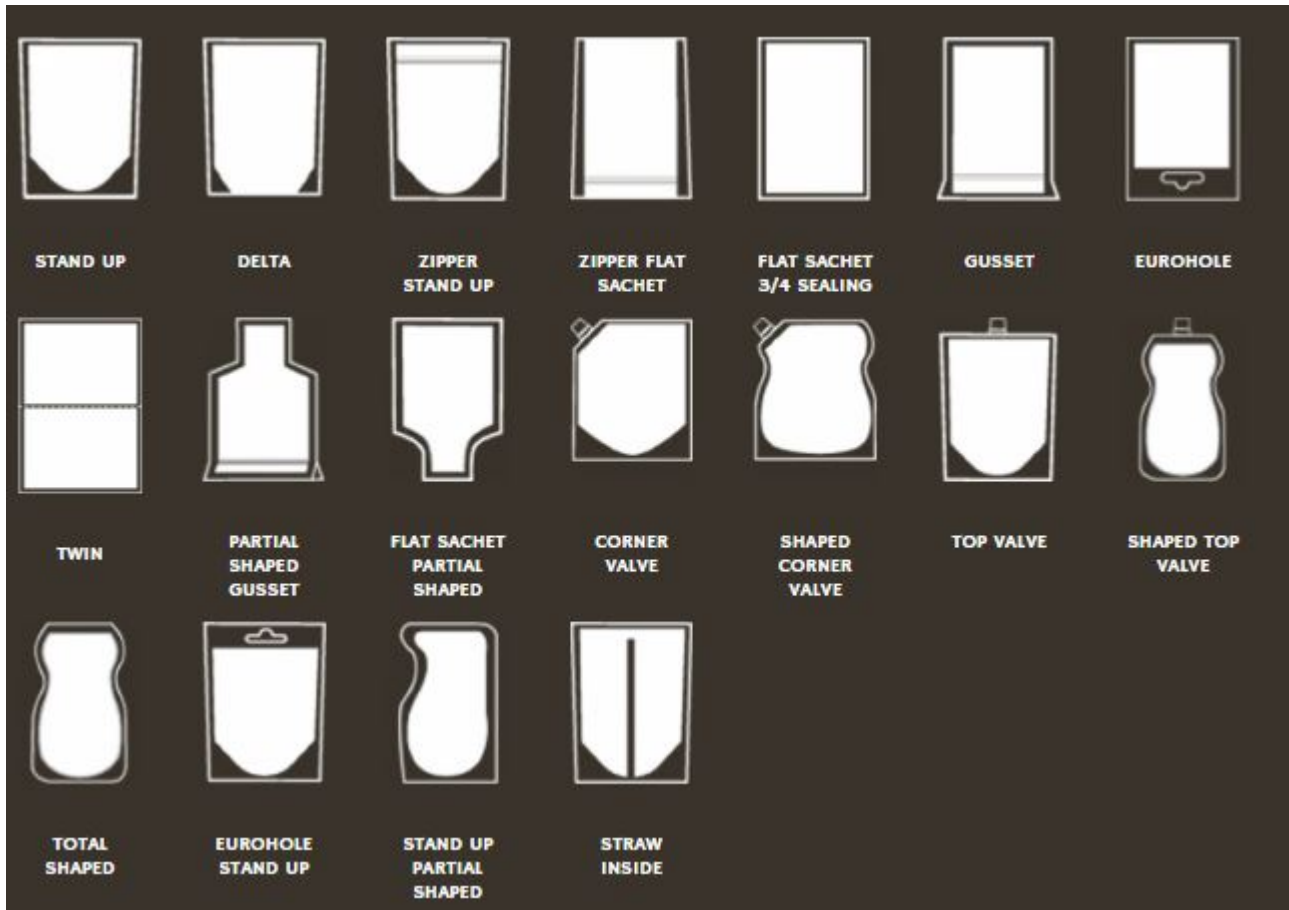

machine dimensions	A	B	C	D*	E*
GP-32 Flat Sachet	8860	1400	1293	2793	10360
GP-32 Stand Up	8860	1400	1293	2793	10360
GP-32 Zipper	9860	1400	1293	2793	11360