

TT-15CW-10



2-up high speed
spouted pouch
filler/sealer



APPLICATIONS

- Center Spout Pouches
- Drinks
- Marmalade
- Shampoo
- Liquid detergent
- Sauce



FEATURES & BENEFITS

- Combines automated spout insertion with filling to increase efficiencies and lower packaging costs.
- Easy-to-use pouch stock rail simply snaps in place to supply pouches, with optional pouch stockers also available.
- Specially developed nozzle allows high speed filling through the spout to reduce pouch top seal contamination.

Liquid Fill

With special filling nozzle, the liquid is filled and foaming is minimized.



Capping

Cap is supplied by handling device. The servo capper controls the torque to maintain constant capping.



**Pro Mach Flexible
Packaging Group**

650 Dekora Woods Blvd.
Saukville, WI 53080

(888) 628-7491
(262) 268-8300

Info@ProMachFlexible.com
www.ProMachFlexible.com

powered by Pro Mach

TT-15CW-10




MACHINE SPECIFICATIONS

2-up high speed
pouch filler/sealer


	TT-15CW-10
Capacity (Depending on product)	40-95 pouches/min.
Pouch Size	<ul style="list-style-type: none"> • (W) 60-120 mm • (L) 110 - 250 mm
Pouch Style	<ul style="list-style-type: none"> • Center spout stand-up • Center spout gusset • Center spout flat
Electric power	Approximately 15kVA
Air consumption	0.5Mpa, 700NI/min (Standard)
Cleaning water	0.2Mpa, 5L/min
Machine Dimensions	1,630 (W) x 3,755 (L) x 1,900 (H) mm
Machine Weight	3,800 kg
Accessories	<ul style="list-style-type: none"> • Discharge conveyor • Product counter • Heater disconnection alarm • Pouch opening detection device




DIMENSIONS

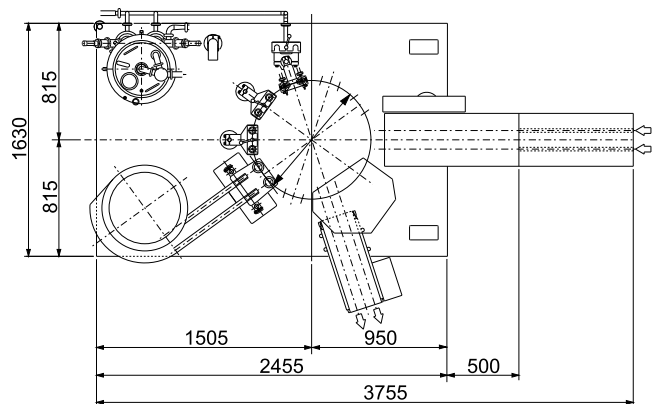

OPERATION

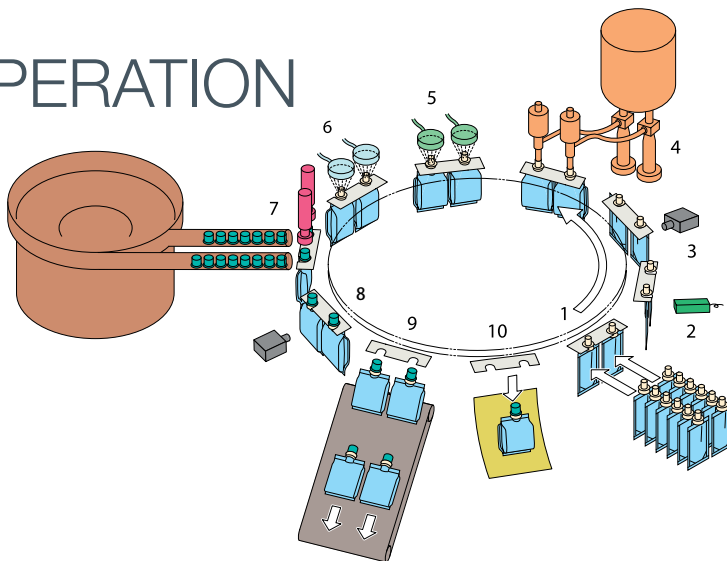

#	Stations	#	Stations
1	Pouch Stock Rail	6	Spout Drying
2	Ink Jet Printer (option)	7	Capping
3	Printing Inspection (option)	8	Capping Inspection (option)
4	Liquid Filling	9	Product Discharge
5	Spout Cleaning	10	Reject Station

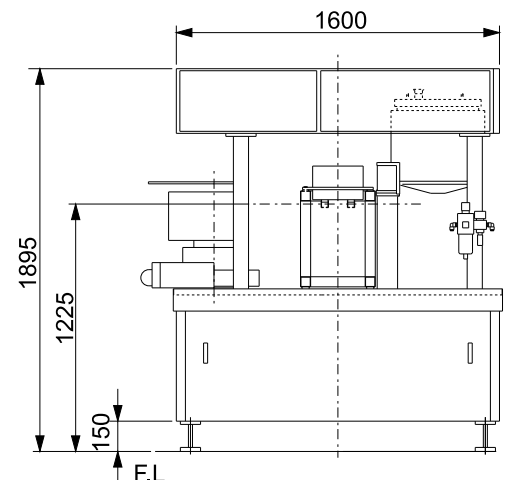

Specifications and dimensions are subject to change without prior notice, due to continuous efforts made for product improvement.