


## *Cup Sealer Auto Filling Machine CP-5L*

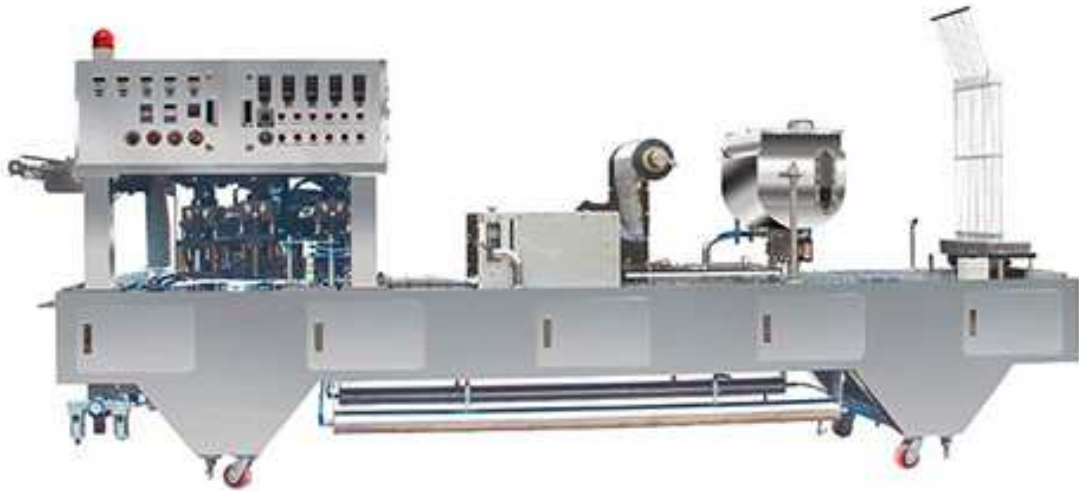

### **Feature**

- It is applicable for packing pudding or dressing
- As for sealing pressure, the powerful air cylinder, Double System, has been adopted.
- Sealing is done twice and attachment/detachment of a sealing bar can be done easily by rail.
- As the operation unit and the electric box are in the upper part of the machine, water cleaning is possible.
- Mold transport can be done in Steps and the water won't overflow even if it fills up a container.
- For accurate sealing, the seal bar has a 360-degree cushion.
- Each unit holds independent functions and has been minimized in mechanical defects.
- A flashing light is turned on 2 minutes before the film is finished. When the films are completely consumed, the machine will stop at its designated position.

### **Contents**

Powder supply outlet (optional), granules, liquids containing solids, liquids of low viscosity, liquids of high viscosity, solid matters and so on (e.g., galbitang (beef-rib soup), naejangtang (beef chitterling soup), gomtang (beef broth), jjajang (black soybean paste), ready-made pouched curry and so on.)

### **Packing material**

AL+PE, OPP+PE, NY+PE, Other relevant packing papers with 3 sides sealed available for thermal sealing

## Specification

Packing row	5 Row
Capacity	100~150 EA/min (on 5 row)
Date printer	Jet Printer & Others Date Printer Option
Packing size	W : 20~150 × L : 20~200mm (option)
Filling capacity	20~300g (option)
Power consumption	Domestic : 220/380V×60Hz - AIR 5 ~ 7 Kw/h
	Overseas : 220/380/440/50×60Hz - AIR 5 ~ 7 Kw/h