

## **Banding Machine HB 40**

*Automatic Stretch Banding or Shrink Wrapping Machine*



Designed to offer unparalleled product size range and pack pattern flexibility. This system is ideal for cartons, blisters and bottles and the like, with polyethylene films. To do shrink wrapping, heat tunnel is required.

- Maximum 25 cycles per minute
- Balcony construction complied with easy operator's approach and cGMP standard
- PLC control with touch panel
- Fully automatic in-line, downstream automation or stand-alone operation
- Easy & rapid format mold change over
- CE Regulation approved

## Bundlings

### ► Stretch Banding



Cartons



Blisters



Toothbrushes

### ► Shrink Wrapping




Cartons




Bottles

## Process



### ► Stretch Banding

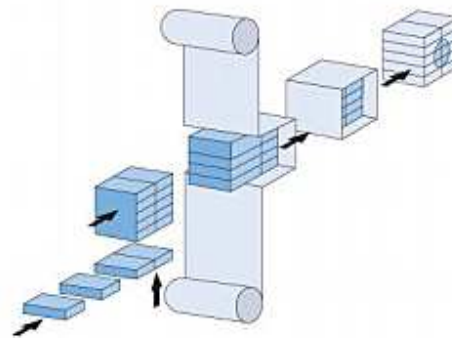


### ► Shrink Wrapping



# TECHNICAL DATA

<b>Output</b>	max. 40 cycles/min.
<b>Format range</b>	A : 20 mm ~ 245 mm B : 20 mm ~ 60 mm C : 65 mm ~ 220 mm  D : 40 mm ~ 370 mm E : 30 mm ~ 200 mm F : 65 mm ~ 220 mm (Custom format range is applicable as per the request)

<b>Film</b>	Polyethylene Thickness : 25 mm ~ 80 mm Width (G) : 55 mm ~ 315 mm Roll (O.D) : max. 300 mm with 76 mm core diameter
-------------	--

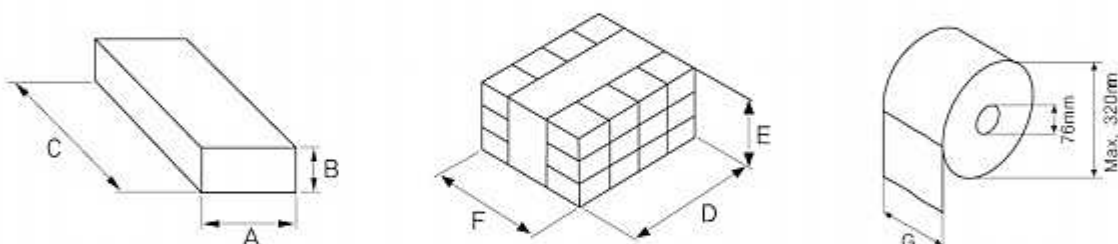

<b>Machine dimension</b>	Width	approx. 1,200 mm
	Length	approx. 1,100 mm
	Height	approx. 1,800 mm

<b>Net weight</b>	approx. 1,000 Kgs
-------------------	-------------------

<b>Utilities</b>	Electronic power connection	380V, 3-Phase, 50/60Hz (Other voltages available on request)
	Electric consumption	1.5Kw
	Compressed air pressure	5 bar in 10% fluctuation
	Air consumption	50NL/min

Words and photographs on this catalogues are to help understanding of the machine model only and subject to technical modification without prior notice. The final specification is as per our quotation offered to you exclusively.