


## HY-450L Type Automatic Shrinking Wrapping Machine

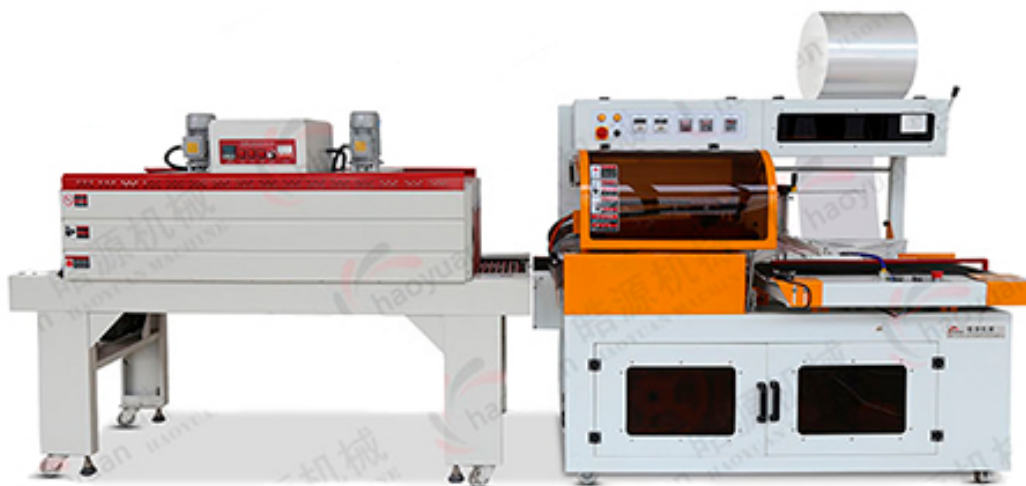

Simple and clear operation interface, convenient adjustment (humanized) Bright colors are used in dangerous places to remind operators that the colors can be changed according to (flexible) Using imported Omron counter beam fiber, customized according to customers requirements (quality assurance) Adopt double fans to ensure stable temperature (better shrinkage effect) Operating places and dangerous places have schematic diagrams (easy to operate) Dust protection of safety cover (safety guarantee)

### Technical Parameters

| model                             | Hy-450 shrinking machine                                    |
|-----------------------------------|---|
| Production speed                  | 0-15 M / min  |
| Bag packing type                  | Thermal shrinkage   |
| Package size                      | Width (width plus height $\leq 400\text{mm}$ )              |
|                                   | Length (length plus height $\leq 480\text{mm}$ )            |
| Calculation formula of film width | (actual product width + height) + 120mm equal to film width |
| Film width                        | $\leq 480\text{mm}$   |
| Outer diameter of packaging film  | $\leq 290\text{mm}$   |
| Packaging film material           | POF folding film  |
| Machine operating height          | 750-850mm   |
| Total power                       | 1.5KW   |
| Type of power supply              | 220kw 50/60HZ   |
| Machine weight                    | 300kgs  |
| Machine dimensions                | 1620x880x1470mm (L x W x H)                                 |