


TT-50™

VERTICAL CARTONER

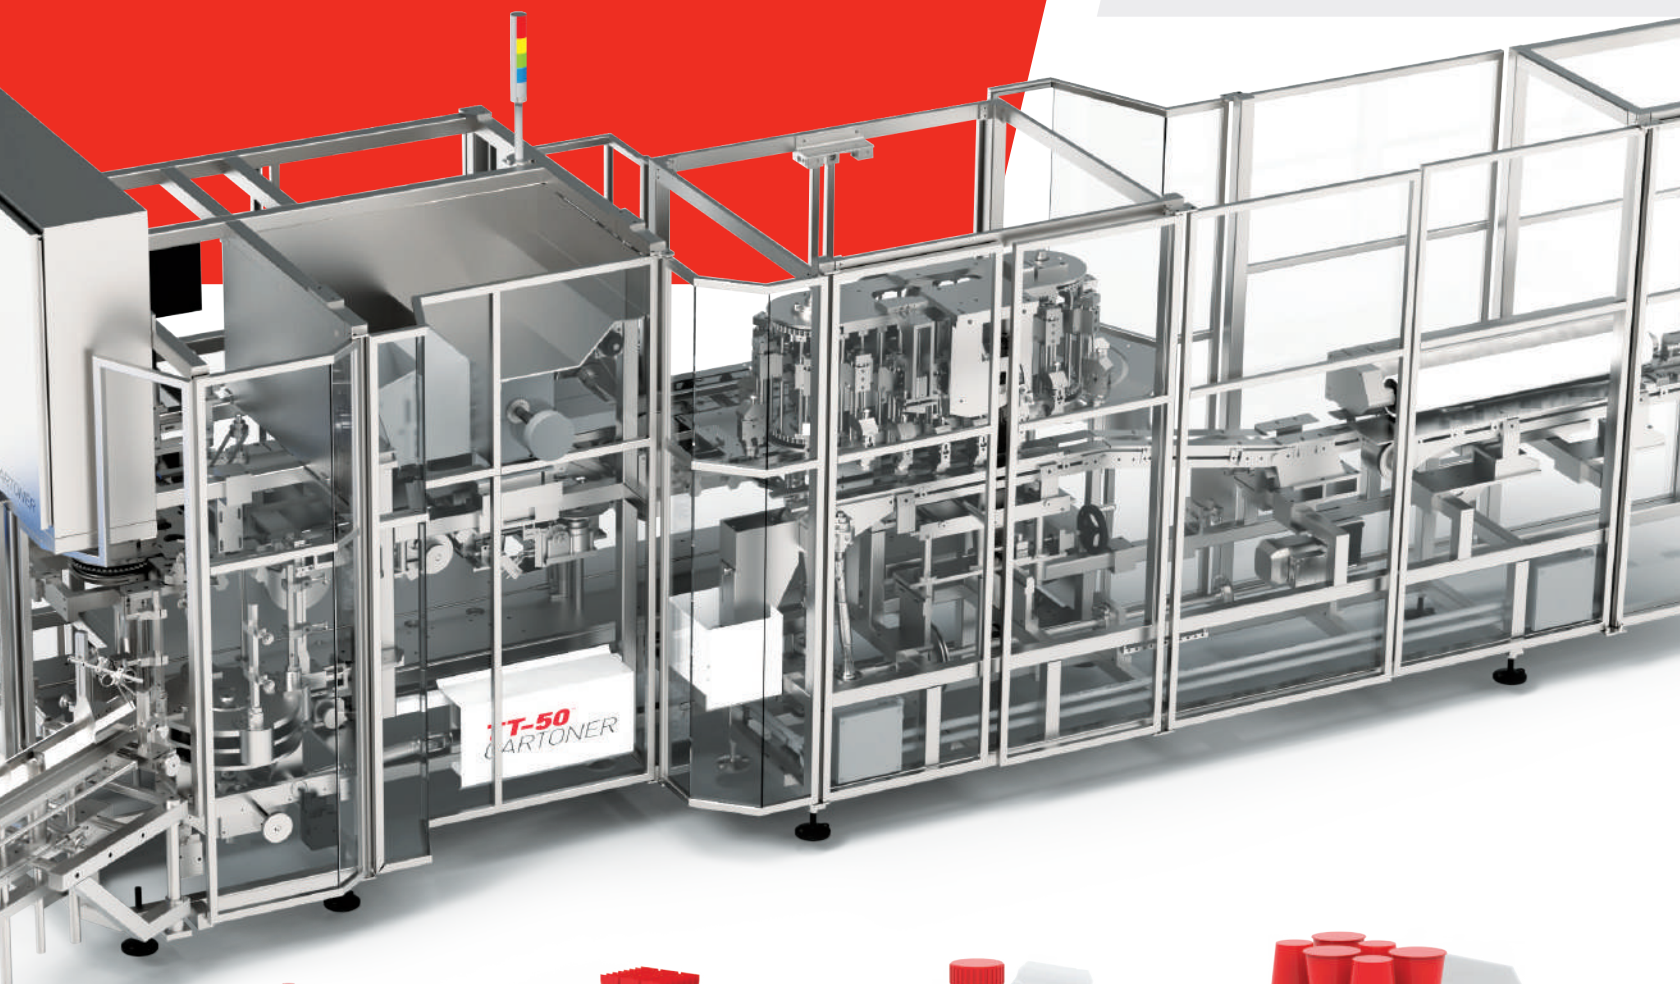

Built solid

Compact portable vertical cartoner for hand/automatic load applications. Features automatic bottle loading or count weigh scale interface. Carton pockets assure positive carton setup and carton squareness, and innovative design allows for quick changeover.




SPECIFICATION

MODE	Continuous motion, intermittent optional.
CARTON POCKET CENTER	3.75, 5.0, 7.5, or 15.0 inches.
SPEED	Variable to 100 CPM, depending upon application.
CARTON FEED	36+” powered magazin with rotary carton feeder.
CARTON CLOSING	Straight or reverse tuck and/or hot melt glue.
CARTON LOADING	Collated and pushed.
FRAME	Welded tubular stainless steel, hinged cover panels with safety electrical interlocks.
DRIVE	Servo drive, with line shaft.
CONTROLS	Allen Bradley PLC’s and electrical components.
ADJUSTMENTS	Lead screws with calibrated scale references.
DIMENSION	Request specific model floor plan.
POWER REQ’S	Wired to accommodate your plants electrical requirements.
AIR REQ’S	Approx. 6.5 CFM 60 psi..
TOOLING	Available for tuck, glue, header, gable, flip-top and hex style carton styles.
HAND LOAD MODELS	Available in 3 different lengths.


KEY FEATURES

- COMPACT FOOTPRINT
- QUICK CHANGEOVER
- MANUAL/AUTOMATIC CARTON LOADING

TOP VIEW

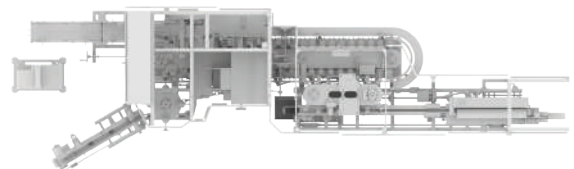

SIDE VIEW

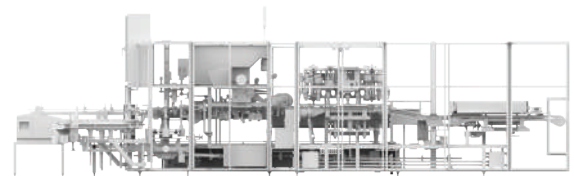

QUALITY MEANS EFFICIENCY