

Banding Machine HB 40S


Stretch banding & shrink wrapping machine



Automatic stretch banding and Shrink wrapping machine for cartons and blisters, HB 40S is designed to meet the requirements of pharmaceutical market for high speed packing line. Balcony construction allows for maximum accessibility to all main parts in order to optimize maintenance and cleaning operations. Servo driven technology can reach production speeds up to 40 bundles per minute. High quality seal in terms of stretching resistance, as well as surface result. Bundle is kept in an orderly manner during sealing operations and sealer temperature is constantly checked by thermo-regulators. Shrink-wrapping be required, a shrink tunnel can be installed as an integral parts of the machine.

- Maximum 40 cycles per minutes
- Balcony construction complied with easy operator's approach and cGMP standard
- PLC control with touch panel
- Fully automatic in-line with downstream machine or stand-alone operation
- Quick&easy tool changeover



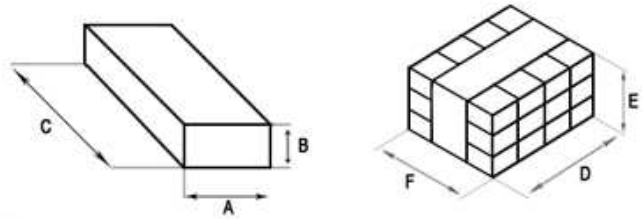

Technical Data

Output		40 cycles/min.		
Format range	A	30 ~ 100 mm	D	60 ~ 300 mm
	B	15 ~ 90 mm	E	30 ~ 200 mm
	C	65 ~ 150 mm	F	65 ~ 150 mm
Film (polyethylene)	Thickness	40 ~ 6- mm		
	Width	50 ~ 300 mm		
	Reel diameter	max. 300 mm (core dia. 76 mm)		
Utilites	Electric power connection	380V, 3-Phase. 50/60 Hz (Other voltages are available on request)		
	Electric consumption	3 KVA		
	Compressed air pressure	6 bar in 10% fluctuation		
	Air consumption	50 NL/min.		
Machine dimension		L/1,800 x W/1,510 x H/1,730 mm		
Weight		1,500 kg		