




## **Automatic High Speed Injectable Dry Powder Filling With Pick &Place Type Rubber Stoppering Machine SBPF-300DP**

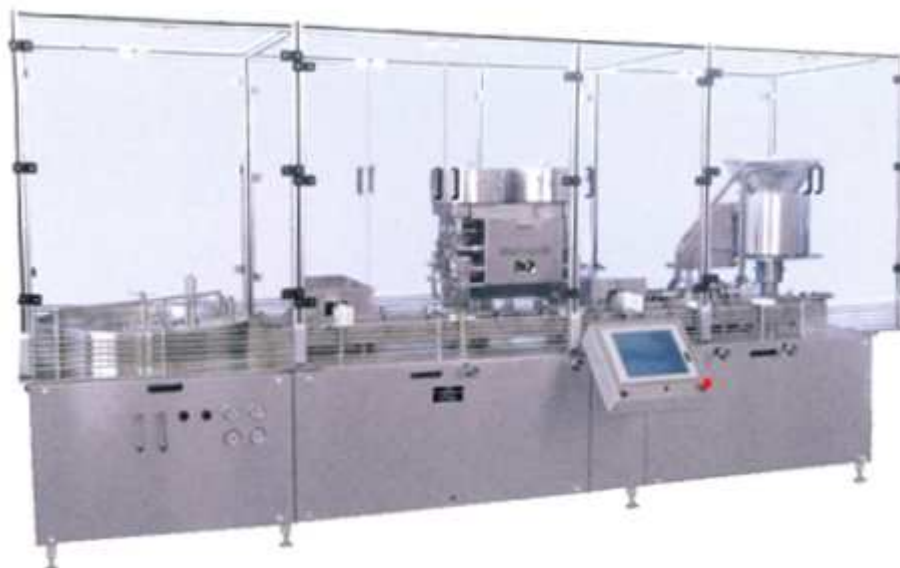

<b>Model</b>	<b>SBPF - 300DP</b>
Direction	Left to Right
Production Rate	Up to 240 fills / min for Single Dose
	Up to 120 Fills / Min for Double Dose
	Up to 80 Fills / Min for Triple Dose
	Up to 60 Fills / Min for Four Dose
Fill Capacity	50 Mg to 1.5 Grms. Single Dose (With Change Parts), 1.5 Grms to 6 grms. Double, Triple and Four Dose. Fill range depending upon vial opening and bulk density of injectable powder
Accuracy	±1% depending upon consistency and the uniformity of bulk density of injectable powder, under controlled level of humidity (i.e.25%)
Electrical Supply	1.5 HP For Main Drive.
	0.50 HP For Unscrambler
	0.50 HP For Scrambler.
Power Requirement	440 Volts, 3 Phase (4 wire System) 50 Hz
Height of conveyor	Adjustable from 800 to 850 MM
Dimensions	4350 MM (L) X 1200 MM (W) X 1660 MM (H)
Net Weight	1250 KGS. (Approx.)
Gross Weight	1450 KGS. (Approx.)