



CFZ-60A、-C TUBE FILLER (applicable to aluminium tubes and metal tubes)



Parameters

- Adapt to the maximum tube diameter: 35mm
- The maximum volume: 1-150ml
- Produce speed : 30-60pcs/min
- Filling precision : $\leq \pm 1\%$
- The power of machine : 1.1kw
- Air pressure : 0.4 - 0.6 Mpa

Function


It can accomplish the operation of two-edge folds, three-edge folds and saddle-shaped folds for aluminium tubes and metal tubes

- Adopt mechanical transmission mode filling system ensuring the stability of loading capacity.
- PLC automatic control system.
- Highly clearl stainless steel frame.
- The connection of emulsifier, cartoning machine and filling machine can be easily achieved.
- It is easy to operate between different sizes of tubes.

- Automatic completion of filling, sealing and batch No. printing in one machine.
- Provided such functions as automatic supply of a tube to a worktable of machine, automatic tube blowing(clearing), tube color mark automatic adjustment in a holder and automatic filling and sealing.
- Speed shall be adjustable by inverter.
- The production capacity can be realized and control automatically.
- The code mechanical hand print the code automatically in the request position.
- Human-machine interface with direct display and control.
- Tube feeding, absorbing and locating device, which is controlled by the original FESTO vacuum generator.
- Automatic detection of tube direction inversion, Omron inversion detection phototube can accurately detect the inverted tube.
- Cam indexing.
- Automatic cleaning the inner tubes and the dust collecting system.
- Provided with malfunction alarm, automatic stopping device when the door is opened and mechanical overload.
- The combined material feeding forms of blow cutting and cutting can guarantee the filling of high viscosity.
- Column style material temperature automatic control blending system. **(optional)**.
- Ultrasonic hopper level sensor. **(optional)**

USA BANNER ultrasonic level probe combined with Siemens module can be used to accurately control material level and give direct display on the touch screen

- No tube no fill.
- Material pump. **(optional)**
- Safe-door switching device. **(optional)**
- When door opened, machine stops
- Emergency stop button

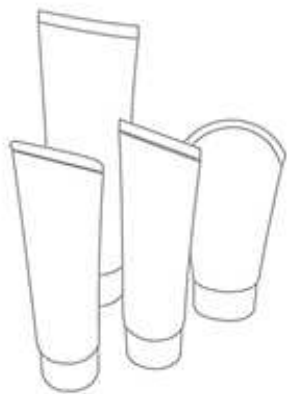

YANTAI CHAOYUE MACHINERY EQUIPMENT CO.,LTD.

烟台超越机械设备有限公司

地址: 烟台市芝罘区幸福中路216-2号
Add: Room 2 No 216 Mid Xingfu Rd Zhifu District, Yantai China
电话(Tel): 0535-6819538 6804585
手机(The Mobile): 13854578998
传真(Fax): 0535-6819538
邮编(Post): 264002

公司主页(Website): www.ytcym.com
电子信箱(E-mail): leader_ytcym@126.com



www.ytcym.com